


FF7LBLBIIF

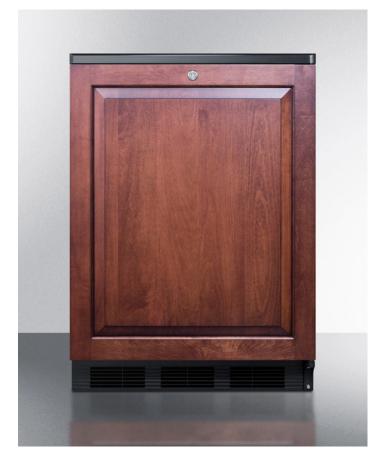

33.5" x 23.63" x 23.63" (H x W x D)

Commercially listed built-in undercounter all-refrigerator for general purpose use, auto defrost w/panel-ready door, lock, and black cabinet

Highlights:

Commercially approved for use in foodservice establishments

Flexible design allows built-in or freestanding use in 24" spaces

Factory-installed lock provides security you can count on

Product Features:

| Commercially approved | ETL-S listed to NSF-7 Standards for use in commercial establishments | |
|------------------------------|---|--|
| Slim undercounter dimensions | Less than 24 inches wide with a full 5.5 c.f. capacity | |
| Built-in capable | Make the best use of space by installing your appliance under the counter and flush with other cabinets | |
| Integrated door frame | Customize the front by mounting an overlay panel over the door; seamless look can blend into other cabinetry with no exposed frame. Handle not included (panel size: 23 5/16" W x 28 1/4" H and at least 3/4" thick; maximum weight: 10 lbs.) | |
| Factory installed lock | Keyed lock for a secure interior | |
| Automatic defrost | Reduced user maintenance with automatic defrost | |
| Adjustable glass shelves | Rearrange the refrigerator space to accommodate all shapes and sizes or remove shelves for a simple clean-up | |
| Deep shelf space | Interior accommodates large trays up to 19 1/2" x 15 1/2" | |
| One piece interior liner | Enjoy easy clean-up with a seamless liner that won't hold a mess in hidden crevices | |
| | | |

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

info@summitappliance.com

 \checkmark





FF7LBLBIIF Specifications:

| Overview | |
|---|---|
| Height of Cabinet | 33.5" (85 cm) |
| Width | 23.63" (60 cm) |
| Depth | 23.63" (60 cm) |
| Depth with door at 90° | 46.0" (117 cm) |
| Capacity | 5.5 cu.ft. (156 L) |
| Defrost Type | Automatic |
| Door | Panel-Ready |
| Cabinet | Black |
| US Electrical Safety | UL |
| Canadian Electrical Safety | ULC |
| Sanitation | ETL-S |
| Amps | 1.3 |
| Voltage/Frequency | 115 V AC/60 Hz |
| Weight | 100.0 lbs. (45 kg) |
| Shipping Weight | 105.0 lbs. (48 kg) |
| Parts & Labor Warranty | 1 Year |
| Compressor Warranty | 5 Years |
| UPC | 761101011219 |
| Refrigerator Features | |
| Door Swing | RHD |
| Reversible | Factory Reversible |
| Shelf Type | Glass |
| Shelf Qty | 3 |
| Adjustable Shelves | Yes |
| | |
| Thermostat Type | Dial |
| Thermostat Type Fan Type | Dial Exterior |
| | |
| Fan Type | Exterior |
| Fan Type Refrigerant Type | Exterior R134a |
| Fan Type Refrigerant Type Refrigerant Amount | Exterior R134a 1.8oz. |
| Fan Type Refrigerant Type Refrigerant Amount High Side PSI | Exterior R134a 1.8oz. 285.0 |
| Fan Type Refrigerant Type Refrigerant Amount High Side PSI Low Side PSI | Exterior R134a 1.8oz. 285.0 70.0 |
| Fan Type Refrigerant Type Refrigerant Amount High Side PSI Low Side PSI Level Legs Qty | Exterior R134a 1.8oz. 285.0 70.0 4 |
| Fan Type Refrigerant Type Refrigerant Amount High Side PSI Low Side PSI Level Legs Qty Interior Light | Exterior R134a 1.8oz. 285.0 70.0 4 |
| Fan Type Refrigerant Type Refrigerant Amount High Side PSI Low Side PSI Level Legs Qty Interior Light Dimensions | Exterior R134a 1.8oz. 285.0 70.0 4 Yes |
| Fan Type Refrigerant Type Refrigerant Amount High Side PSI Low Side PSI Level Legs Qty Interior Light Dimensions Interior Height | Exterior R134a 1.8oz. 285.0 70.0 4 Yes 27.75" (70 cm) |
| Fan Type Refrigerant Type Refrigerant Amount High Side PSI Low Side PSI Level Legs Qty Interior Light Dimensions Interior Height Interior Width | Exterior R134a 1.8oz. 285.0 70.0 4 Yes 27.75" (70 cm) 20.0" (51 cm) |

| Compressor Step Width | 20.0" (51 cm) |
|-----------------------|---------------|
| Compressor Step Depth | 6.0" (15 cm) |





