accuc@ld

VLT850



33" x 45.75" x 24" (H x W x D)

Laboratory chest freezer capable of -35° C (-31° F) operation

Highlights:

Commercially listed to NSF-7 standards and meets UL-471

Capable of operating at -35° C for long-term food preservation and safe storage of pharmaceuticals

Factory installed lock provides security you can count on


Product Features:

Commercially approved	UL-S listed to NSF-7 commercial standards and meets UL commercial standard 471	
-35° C (-31° F) capable	Low temperature operation ideal for vaccines, pharmaceuticals, and long-term preservation of frozen food	
Factory installed lock	Keep contents secure with a lock on the lid	
Digital thermostat	Electronic controls for precise temperature management	
Alarm with temperature display	Audible alarm sounds to warn of temperature variations with a digital readout on the thermometer to provide the interior temperature	
Manual defrost	Energy efficient operation	
Corner protectors	Exterior protection important in high traffic settings	
100% CFC free	Environmentally friendly design does not contain ozone-damaging chemicals	
CARB Compliant	Environmentally friendly hydrocarbon-based refrigerant for a greener footprint that meets current CARB regulations	

accuc@ld

VLT850 Specifications:

Overview		
Height of Cabinet	33.0" (84 cm)	
Width	45.75" (116 cm)	
Depth	24.0" (61 cm)	
Depth with Handle	25.13" (64 cm)	
Capacity	9.0 cu.ft. (255 L)	
Defrost Type	Manual	
Door	White	
Cabinet	White	
US Electrical Safety	UL	
Canadian Electrical Safety	ULC	
Sanitation	UL-S	
Amps	1.4	
Voltage/Frequency	115 V AC/60 Hz	
Weight	100.0 lbs. (45 kg)	
Parts & Labor Warranty	1 Year	
Compressor Warranty	5 Years	
UPC	761101009285	
Freezer		
Door Swing	Lift-Up	
Interior Height	26.5" (67 cm)	
Interior Width	37.5" (95 cm)	
Interior Depth	16.0" (41 cm)	
Thermostat Type	Digital	
Refrigerant Type	R600a	
Refrigerant Amount	1.94 oz.	
Wheels	2	
Compressor Step Height	8.5" (22 cm)	
Compressor Step Width	8.0" (20 cm)	
Compressor Step Depth	8.0" (20 cm)	

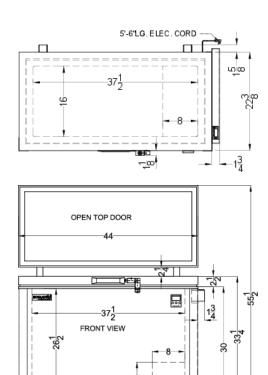

ELEC. CORD

Φ.

DRAIN