
accuc@ld

VT65MLBIFR

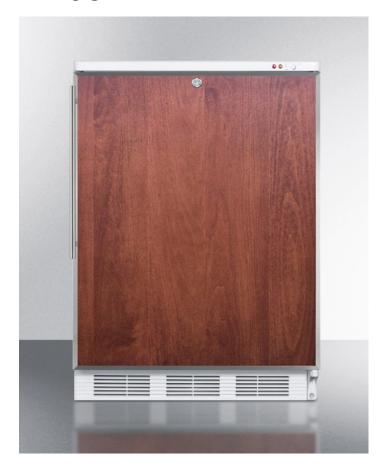

33.5" x 23.63" x 23.5" (H x W x D)

Built-in undercounter medical all-freezer capable of -25° C operation; white exterior with lock and stainless steel door frame to accept custom panels

Highlights:

-25° C operation for safe storage of temperature sensitive materials

Flexible design allows built-in or freestanding use

Perfectly sized to fit under counters and in tight 24 inch spaces

Product Features:

| Slim undercounter dimensions | Less than 24 inches wide to fit tight spaces |
|---------------------------------|---|
| Built-in capable | Make the best use of space by installing your appliance under the counter and flush with other cabinets |
| Fully finished white cabinet | Allows the unit to be used freestanding |
| Height Adjustable | Adjustable legs allow the unit to be sized from 33 1/2" to 34 3/4" high |
| Factory installed lock | Keep contents secure with a key lock on the door |
| Stainless steel door frame | Slide a panel into the frame to match your unit to other cabinets (panel size: $23" \text{ W x } 28" \text{ H at up to } 1/4" \text{ thick})$ |
| -25° C capable | Low temperature operation is ideal for vaccine, pharmaceuticals, and other temperature sensitive materials |
| Manual defrost | Static and stable cooling with no internal fans |
| Three removable storage baskets | Conveniently organize your items while keeping the temperature stable when the door is opened |



accuc@ld

VT65MLBIFR Specifications:

| Height of Cabinet 33.5" (85 cm) Width 23.63" (60 cm) Depth 23.5" (60 cm) Depth with Handle 25.5" (65 cm) Depth with door at 90° 46.13" (117 cm) | n) |
|---|---------------|
| Depth 23.5" (60 cr Depth with Handle 25.5" (65 cr | |
| Depth with Handle 25.5" (65 cm | n) |
| <u> </u> | n) |
| Depth with door at 90° 46.13" (117 cr | n) |
| | n) |
| Capacity 3.5 cu.ft. (99 | L) |
| Defrost Type Manu | ıal |
| Door Panel-Rea | dy |
| Cabinet Whi | te |
| US Electrical Safety | JL |
| Canadian Electrical UL Safety | .C |
| Amps 1 | .3 |
| Voltage/Frequency 115 V AC/60 H | Ηz |
| Weight 105.0 lbs. (48 k | g) |
| Parts & Labor Warranty 1 Ye | ar |
| Compressor Warranty 5 Year | rs |
| UPC 76110103079 | 91 |
| Freezer | |
| Door Swing RF | ID |
| Reversible Factory Reversib | le |
| Height Adjustable | 1 |
| Interior Height 24.25" (62 cm | n) |
| Interior Width 17.75" (45 cm | n) |
| Interior Depth 16.5" (42 cm | n) |
| Thermostat Type D | ial |
| Fan Type Exteri | or |
| Refrigerant Type R13- | 4a |
| | |
| Refrigerant Amount 2.7 c | Z. |
| Refrigerant Amount 2.7 c High Side PSI 235 | |
| | .0 |
| High Side PSI 235 | .0 |
| High Side PSI 235 Low Side PSI 70 Level Legs | .0 |
| High Side PSI 235 Low Side PSI 70 Level Legs | .0 |
| High Side PSI 235 Low Side PSI 70 Level Legs Interior Drawers Y | .0 4 es |
| High Side PSI 235 Low Side PSI 70 Level Legs Interior Drawers Y Drawers Qty | 3 n) |
| High Side PSI 235 Low Side PSI 70 Level Legs Interior Drawers Y Drawers Qty Compressor Step Height 6.0" (15 cm | 3 m) |



