## accuc@ld

# VT65MLBIVACADA



32.25" x 23.63" x 23.5" (H x W x D)

ADA compliant built-in undercounter vaccine all-freezer with digital thermostat, temperature alarm, hospital grade cord, self-closing door, and front lock

### **Highlights:**

Medical grade design conforms with CDC guidelines for vaccine storage

32" height fits under lower ADA compliant counters

Capable of operating at -25° C for long-term preservation of temperature sensitive materials

#### **Product Features:**

ADA compliant	32" height to fit under lower ADA compliant counters	
Slim undercounter dimensions	24" footprint is ideal for use under the counter	
Built-in capable	Front-breathing design allows built-in installation under counters	
-25° C/-13° F capable	Low temperature operation ideal for vaccines, pharmaceuticals, and other sensitive materials	
Digital thermostat	Electronic controls for more precise temperature management	
High/low temperature alarm	Audible alarm sounds if the interior temperature rises or falls out of set range	
NIST calibrated temperature display	Alarm includes NIST calibrated display of the current interior and high/low temperature to the nearest tenth of a degree	
Self-closing door	Door closes automatically when opened at angles less than 90°	
3/8" access port	Unit comes with a factory installed probe hole for users to connect their own monitoring equipment	




## accuc@ld

### **VT65MLBIVACADA Specifications:**

Nominal Height         32.0" (81 cm)           Height of Cabinet         32.0" (81 cm)           Height to Hinge Cap         32.25" (82 cm)           Nominal Width         24.0" (61 cm)           Width         23.63" (60 cm)           Nominal Depth         24.0" (61 cm)           Depth         23.5" (60 cm)           Depth with Handle         24.25" (62 cm)           Depth with door at 90°         45.13" (115 cm)           Capacity         3.2 cu.ft. (91 L)           Defrost Type         Manual           Door         White           Cabinet         White           US Electrical Safety         UL           Canadian Electrical Safety         ULC           Amps         1.3           Voltage/Frequency         115 V AC/60 Hz           Weight         105.0 lbs. (48 kg)           Parts & Labor Warranty         2 Years		
Height to Hinge Cap         32.25" (82 cm)           Nominal Width         24.0" (61 cm)           Width         23.63" (60 cm)           Nominal Depth         24.0" (61 cm)           Depth         23.5" (60 cm)           Depth with Handle         24.25" (62 cm)           Depth with door at 90°         45.13" (115 cm)           Capacity         3.2 cu.ft. (91 L)           Defrost Type         Manual           Door         White           Cabinet         White           US Electrical Safety         UL           Canadian Electrical Safety         ULC           Safety         1.3           Voltage/Frequency         115 V AC/60 Hz           Weight         105.0 lbs. (48 kg)		
Nominal Width         24.0" (61 cm)           Width         23.63" (60 cm)           Nominal Depth         24.0" (61 cm)           Depth         23.5" (60 cm)           Depth with Handle         24.25" (62 cm)           Depth with door at 90°         45.13" (115 cm)           Capacity         3.2 cu.ft. (91 L)           Defrost Type         Manual           Door         White           Cabinet         White           US Electrical Safety         UL           Canadian Electrical Safety         ULC           Amps         1.3           Voltage/Frequency         115 V AC/60 Hz           Weight         105.0 lbs. (48 kg)		
Width         23.63" (60 cm)           Nominal Depth         24.0" (61 cm)           Depth         23.5" (60 cm)           Depth with Handle         24.25" (62 cm)           Depth with door at 90°         45.13" (115 cm)           Capacity         3.2 cu.ft. (91 L)           Defrost Type         Manual           Door         White           Cabinet         White           US Electrical Safety         UL           Canadian Electrical Safety         ULC           Safety         1.3           Voltage/Frequency         115 V AC/60 Hz           Weight         105.0 lbs. (48 kg)		
Nominal Depth 24.0" (61 cm)  Depth 23.5" (60 cm)  Depth with Handle 24.25" (62 cm)  Depth with door at 90° 45.13" (115 cm)  Capacity 3.2 cu.ft. (91 L)  Defrost Type Manual  Door White  Cabinet White  US Electrical Safety UL  Canadian Electrical Safety ULC  Safety  Amps 1.3  Voltage/Frequency 115 V AC/60 Hz  Weight 105.0 lbs. (48 kg)		
Depth 23.5" (60 cm)  Depth with Handle 24.25" (62 cm)  Depth with door at 90° 45.13" (115 cm)  Capacity 3.2 cu.ft. (91 L)  Defrost Type Manual  Door White  Cabinet White  US Electrical Safety UL  Canadian Electrical Safety ULC  Safety  Amps 1.3  Voltage/Frequency 115 V AC/60 Hz  Weight 105.0 lbs. (48 kg)		
Depth with Handle 24.25" (62 cm)  Depth with door at 90° 45.13" (115 cm)  Capacity 3.2 cu.ft. (91 L)  Defrost Type Manual  Door White  Cabinet White  US Electrical Safety UL  Canadian Electrical Safety ULC  Safety  Amps 1.3  Voltage/Frequency 115 V AC/60 Hz  Weight 105.0 lbs. (48 kg)		
Depth with door at 90° 45.13" (115 cm) Capacity 3.2 cu.ft. (91 L) Defrost Type Manual Door White Cabinet White US Electrical Safety UL Canadian Electrical Safety Amps 1.3 Voltage/Frequency 115 V AC/60 Hz Weight 105.0 lbs. (48 kg)		
Capacity 3.2 cu.ft. (91 L)  Defrost Type Manual  Door White  Cabinet White  US Electrical Safety UL  Canadian Electrical Safety  Amps 1.3  Voltage/Frequency 115 V AC/60 Hz  Weight 105.0 lbs. (48 kg)		
Defrost Type Manual  Door White  Cabinet White  US Electrical Safety UL  Canadian Electrical Safety  Amps 1.3  Voltage/Frequency 115 V AC/60 Hz  Weight 105.0 lbs. (48 kg)		
Door White Cabinet White US Electrical Safety UL Canadian Electrical Safety Amps 1.3 Voltage/Frequency 115 V AC/60 Hz Weight 105.0 lbs. (48 kg)		
Cabinet White US Electrical Safety UL Canadian Electrical Safety  Amps 1.3 Voltage/Frequency 115 V AC/60 Hz Weight 105.0 lbs. (48 kg)		
US Electrical Safety  Canadian Electrical Safety  Amps  1.3  Voltage/Frequency  115 V AC/60 Hz  Weight  105.0 lbs. (48 kg)		
Canadian Electrical Safety  Amps 1.3  Voltage/Frequency 115 V AC/60 Hz  Weight 105.0 lbs. (48 kg)		
Safety  Amps 1.3  Voltage/Frequency 115 V AC/60 Hz  Weight 105.0 lbs. (48 kg)		
Voltage/Frequency 115 V AC/60 Hz Weight 105.0 lbs. (48 kg)		
Weight 105.0 lbs. (48 kg)		
Parts & Labor Warranty 2 Years		
Compressor Warranty 5 Years		
UPC 761101043517		
Freezer		
Door Swing RHD		
Reversible Factory Reversible		
Interior Height 24.25" (62 cm)		
Interior Width 17.75" (45 cm)		
Interior Depth 16.5" (42 cm)		
Thermostat Type Digital		
Fan Type Exterior		
Refrigerant Type R134a		
Refrigerant Amount 2.7 oz.		
High Side PSI 235.0		
Low Side PSI 70.0		
Interior Drawers Yes		
Interior Drawers Yes  Drawers Qty 3		

Compressor Step Depth	5.5" (14 cm)
Temperature Range	-12°C to -25°C

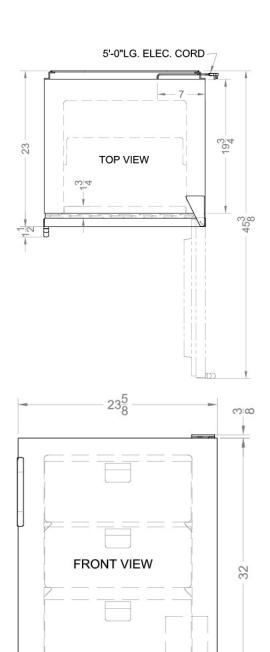





ELEC. CORD