SUMMIT

SCR1536BG



33.88" x 14.75" x 22.75" (H x W x D)

15" wide built-in undercounter glass door beverage cooler designed for the display of refrigeration and sealed food in commercial or residential settings, with digital controls, lock, LED light, and black cabinet

Highlights:

Just under 15" wide for an easy fit, with a flush back design to save space

Flexible design allows built-in or freestanding use under counters

Digital thermostat offers precise and convenient temperature control

Product Features:

Commercially approved	ETL-S listed to NSF-7 Standards for use in commercial establishments Make the best use of space by installing your appliance under the counter	
Built-in capable		
Fully finished black cabinet	Allows the unit to be used freestanding	
Glass door with stainless steel trim	Provides a full display of stored contents with a heat-safe double tempered design	
Factory installed lock	Keyed security on the door	
Digital thermostat	Electronic controls for precise temperature management.	
Digital display	Temperature readout can be shown in Celsius or Fahrenheit	
LED lighting	Gentle illumination with an on/off switch	
Automatic defrost	Reduced maintenance with the convenience of auto defrost	

 \checkmark




SUMMIT

SCR1536BG Specifications:

Nominal Height34.0" (86 cmHeight of Cabinet33.88" (86 cmNominal Width15.0" (38 cmWidth14.75" (37 cmNominal Depth23.0" (58 cmDepth22.75" (58 cmDepth with Handle24.63" (63 cmDepth with door at 90°36.25" (92 cmCapacity2.45 cu.ft. (69 LDefrost TypeAutomatiDoorGlasCabinetBlacUS Electrical SafetyETL-C
Nominal Width15.0" (38 cmWidth14.75" (37 cmNominal Depth23.0" (58 cmDepth22.75" (58 cmDepth with Handle24.63" (63 cmDepth with door at 90°36.25" (92 cmCapacity2.45 cu.ft. (69 LDefrost TypeAutomatiDoorGlasCabinetBlacUS Electrical SafetyETL-C
Width14.75" (37 cmNominal Depth23.0" (58 cmDepth22.75" (58 cmDepth with Handle24.63" (63 cmDepth with door at 90°36.25" (92 cmCapacity2.45 cu.ft. (69 LDefrost TypeAutomatiDoorGlasCabinetBlacUS Electrical SafetyETL-C
Nominal Depth23.0" (58 cmDepth22.75" (58 cmDepth with Handle24.63" (63 cmDepth with door at 90°36.25" (92 cmCapacity2.45 cu.ft. (69 LDefrost TypeAutomatiDoorGlasCabinetBlacUS Electrical SafetyETL-C
Depth22.75" (58 cmDepth with Handle24.63" (63 cmDepth with door at 90°36.25" (92 cmCapacity2.45 cu.ft. (69 LDefrost TypeAutomatiDoorGlasCabinetBlacUS Electrical SafetyETL-C
Depth with Handle24.63" (63 cmDepth with door at 90°36.25" (92 cmCapacity2.45 cu.ft. (69 LDefrost TypeAutomatiDoorGlasCabinetBlacUS Electrical SafetyETL-C
Depth with door at 90°36.25" (92 cmCapacity2.45 cu.ft. (69 LDefrost TypeAutomatiDoorGlasCabinetBlacUS Electrical SafetyETL-CCanadian Electrical SafetyETL-C
Capacity2.45 cu.ft. (69 LDefrost TypeAutomatiDoorGlasCabinetBlacUS Electrical SafetyETL-CCanadian Electrical SafetyETL-C
Defrost TypeAutomatiDoorGlasCabinetBlacUS Electrical SafetyETCanadian Electrical SafetyETL-0
DoorGlasCabinetBlacUS Electrical SafetyETL-CCanadian Electrical SafetyETL-C
CabinetBlacUS Electrical SafetyETCanadian Electrical SafetyETL-0
US Electrical Safety ETL-C
Canadian Electrical Safety ETL-0
Sanitation ETL-S
Energy Usage/Year 250.0kWh/yea
Amps 1.
Voltage/Frequency 115 V AC/60 H
Weight 77.0 lbs. (35 kg
Parts & Labor Warranty 1 Yea
Compressor Warranty 5 Year
UPC 76110105022
Refrigerator Features
Sabbath Mode Ye
Door Swing RHI
Reversible Ye
Shelf Type Chrom
Shelf Qty
Thermostat Type Digita
Refrigerant Type R600
Refrigerant Amount 0.64oz
High Side PSI 270.
Low Side PSI 105.
Level Legs Qty
Interior Light Ye
Dimensions
Interior Height 23.5" (60 cm

Interior Depth	16.5" (42 cm)
Compressor Step Height	3.75" (10 cm)
Compressor Step Width	10.25" (26 cm)
Compressor Step Depth	4.5" (11 cm)

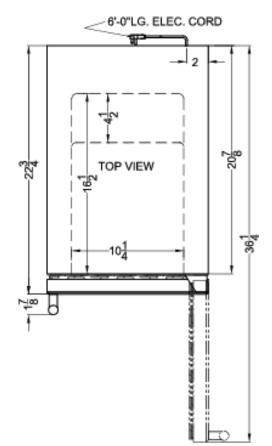



SUMMIT

