accucold

VT65MLBIMED2



33.75" x 23.63" x 23.5" (H x W x D)

Built-in undercounter medical/scientific -25°C capable allfreezer with front control panel equipped with a digital thermostat and NIST calibrated thermometer/alarm

Highlights:

Specially designed and featured to meet the CDC, VFC and VFA's guidelines for safe vaccine storage

User-friendly front control panel keeps the thermostat and alarm in reach without having to open the door

Assembled in the USA from domestic and imported components

Product Features:

Reliable temperature stability	Designed and engineered to store vaccines and other sensitive materials under stable temperature conditions	
Slim undercounter dimensions	24" footprint is ideal for use under the counter	
Built-in capable	Front-breathing design allows built-in installation under counters	
-25º C/-13º F capable	Low temperature operation ideal for vaccines, pharmaceuticals, and other sensitive materials	
Digital thermostat	Electronic controls for more precise temperature management, with temperature readout and controls externally located for added convenience	
High/low temperature alarm	Audible alarm sounds if the interior temperature rises or falls out of set range	
NIST calibrated temperature display	Alarm includes continuous NIST calibrated display of the current interior and high/low temperature, and can be switched from Celsius to Fahrenheit at the touch of a button	
Buffered temperature probe	Thermometer probe is encased in a glycol-filled bottle to maintain temperature readings closest to stored contents, as recommended by the CDC, VFC and VFA's guidelines	
Factory installed lock	Keyed lock conveniently located towards the top of the door for added security (2 keys included)	

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799





accucold

VT65MLBIMED2 Specifications:

Overview	
Nominal Height	34.0" (86 cm)
Height of Cabinet	33.75" (86 cm)
Nominal Width	24.0" (61 cm)
Width	23.63" (60 cm)
Nominal Depth	24.0" (61 cm)
Depth	23.5" (60 cm)
Depth with Handle	25.5" (65 cm)
Depth with door at 90°	46.0" (117 cm)
Capacity	3.2 cu.ft. (91 L)
Defrost Type	Manual
Door	White
Cabinet	White
US Electrical Safety	ETL
Canadian Electrical Safety	ETL-C
Amps	1.3
Voltage/Frequency	115 V AC/60 Hz
Weight	105.0 lbs. (48 kg)
Parts & Labor Warranty	1 Year
Compressor Warranty	5 Years
UPC	761101056531
Freezer	
Door Swing	RHD
Reversible	Factory Reversible
Interior Height	24.25" (62 cm)
Interior Width	17.63" (45 cm)
Interior Depth	17.0" (43 cm)
Thermostat Type	Digital
Fan Type	Exterior
Refrigerant Type	R134a
Refrigerant Amount	2.76 oz.
High Side PSI	235.0
Low Side PSI	88.0
Level Legs	4
Interior Drawers	Yes
Drawers Qty	3
Compressor Step Height	5.5" (14 cm)
Compressor Step Width	17.63" (45 cm)

Compressor Step Depth	5.5" (14 cm)
Temperature Range	-12°C to -25°C

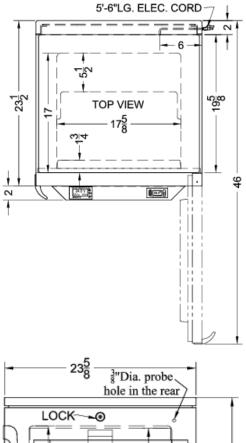



SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

