accucold

SCR600LPLUS2



33.5" x 23.63" x 23.5" (H x W x D)

24" wide glass door refrigerator for freestanding use, auto defrost with a lock, NIST calibrated thermometer, digital thermostat, and internal fan

Highlights:

Ideal 24" footprint offers large capacity in a slim fit

Thermometer provides external readout of current and high/low temperature

Glass door offers full display of interior

Product Features:

Commercially approved	ETL-S listed to NSF standards for commercial use	
Glass door	Provides a full display of stored contents	
Digital thermostat	Electronic controls ensure easy and intuitive temperature management	
Factory installed lock	Keyed security on the refrigerator door	
NIST calibrated temperature display	Thermometer provides continuous display of the current and high/low temperature to the nearest tenth of a degree, with a readout switchable from Celsius to Fahrenheit at the touch of a button	
Buffered temperature probe	Thermometer probe is encased in a glycol-filled bottle to better simulate the temperature of stored contents instead of refrigerator air temperature	
Automatic defrost	Reduced maintenance with auto defrost system	
Internal fan	Fan-forced cooling ensures the unit is evenly cooled from top to bottom	
Adjustable wire shelves	Rearrange refrigerator space to accommodate all sizes or remove shelves for simple cleanup	

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

 \checkmark





accuceld

SCR600LPLUS2 Specifications:

Overview	
Height of Cabinet	33.5" (85 cm)
Width	23.63" (60 cm)
Depth	23.5" (60 cm)
Depth with Handle	25.5" (65 cm)
Depth with door at 90°	46.0" (117 cm)
Capacity	5.5 cu.ft. (156 L)
Defrost Type	Automatic
Door	Glass
Cabinet	White
US Electrical Safety	ETL
Canadian Electrical Safety	ETL-C
Sanitation	ETL-S
Amps	1.0
Voltage/Frequency	115 V AC/60 Hz
Weight	100.0 lbs. (45 kg)
Parts & Labor Warranty	1 Year
Compressor Warranty	5 Years
UPC	761101057903
Refrigerator Features	
Door Swing	RHD
Reversible	
	Factory Reversible
Shelf Type	Factory Reversible Wire
Shelf Type Shelf Qty	-
	Wire
Shelf Qty	Wire 4
Shelf Qty Adjustable Shelves	Wire 4 Yes
Shelf Qty Adjustable Shelves Thermostat Type	Wire 4 Yes Digital
Shelf Qty Adjustable Shelves Thermostat Type Fan Type	Wire 4 Yes Digital Interior
Shelf QtyAdjustable ShelvesThermostat TypeFan TypeRefrigerant Type	Wire 4 Yes Digital Interior R134a
Shelf QtyAdjustable ShelvesThermostat TypeFan TypeRefrigerant TypeRefrigerant Amount	Wire 4 Yes Digital Interior R134a 1.8oz.
Shelf QtyAdjustable ShelvesThermostat TypeFan TypeRefrigerant TypeRefrigerant AmountHigh Side PSI	Wire 4 Yes Digital Interior R134a 1.8oz. 285.0
Shelf QtyAdjustable ShelvesThermostat TypeFan TypeRefrigerant TypeRefrigerant AmountHigh Side PSILow Side PSI	Wire 4 Yes Digital Interior R134a 1.8oz. 285.0 70.0
Shelf QtyAdjustable ShelvesThermostat TypeFan TypeRefrigerant TypeRefrigerant AmountHigh Side PSILow Side PSILevel Legs Qty	Wire 4 Yes Digital Interior R134a 1.8oz. 285.0 70.0 2
Shelf Qty Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount High Side PSI Low Side PSI Level Legs Qty Interior Light	Wire 4 Yes Digital Interior R134a 1.8oz. 285.0 70.0 2 Yes
Shelf QtyAdjustable ShelvesThermostat TypeFan TypeRefrigerant TypeRefrigerant AmountHigh Side PSILow Side PSILevel Legs QtyInterior LightTemperature Range	Wire 4 Yes Digital Interior R134a 1.8oz. 285.0 70.0 2 Yes
Shelf QtyAdjustable ShelvesThermostat TypeFan TypeRefrigerant TypeRefrigerant AmountHigh Side PSILow Side PSILevel Legs QtyInterior LightTemperature RangeDimensions	Wire 4 Yes Digital Interior R134a 1.8oz. 285.0 70.0 2 2 to 8°C / 36 to 46°F
Shelf QtyAdjustable ShelvesThermostat TypeFan TypeRefrigerant TypeRefrigerant AmountHigh Side PSILow Side PSILevel Legs QtyInterior LightTemperature RangeDimensionsInterior Height	Wire 4 4 Yes Digital Interior R134a 1.8oz. 285.0 70.0 2 2 to 8°C / 36 to 46°F 2 to 8°C / 36 to 46°F

Compressor Step Height	6.0" (15 cm)
Compressor Step Width	20.75" (53 cm)
Compressor Step Depth	5.0" (13 cm)



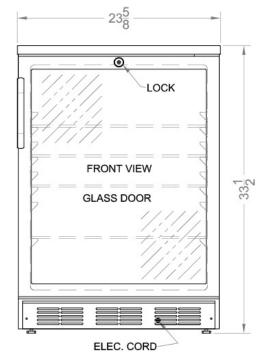

6'-0"LG. ELEC. CORD

