


# FS24LPRO

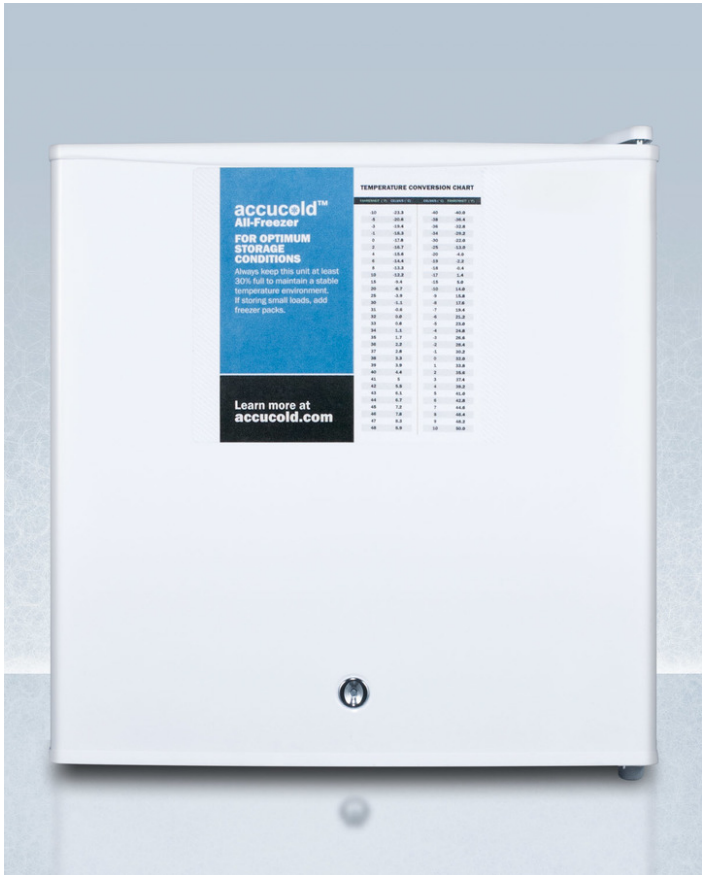

20" x 18.5" x 17.63" (H x W x D)

Compact manual defrost all-freezer with lock and probe hole

## Highlights:

Compact size is ideal for countertop use

Factory installed access port allows users to install their own monitoring equipment

-20°C capable with manual defrost operation

## Product Features:

Compact dimensions	Ideal size for use on top of counters
Factory installed lock	Keyed security for a secure interior
Manual defrost	Static cooling system for reduced temperature fluctuations
-20° capable	Low temperature capability ideal for certain sensitive items
Access port	Includes a factory installed probe hole for users to install their own monitoring equipment
Removable shelf	Includes one wire shelf for easier storage
One-piece interior liner	Seamless interior for easier cleanup
Adjustable thermostat	Dial thermostat located inside for easy temperature management
Flat door liner	Designed to comply with CDC guidelines

## FS24LPRO Specifications:

Overview	
Nominal Height	20.0" (51 cm)
Height of Cabinet	19.63" (50 cm)
Height to Hinge Cap	20.0" (51 cm)
Nominal Width	19.0" (48 cm)
Width	18.5" (47 cm)
Nominal Depth	18.0" (46 cm)
Depth	17.63" (45 cm)
Depth with door at 90°	34.5" (88 cm)
Capacity	1.4 cu.ft. (40 L)
Defrost Type	Manual
Door	White
Cabinet	White
US Electrical Safety	ETL
Canadian Electrical Safety	ETL-C
Amps	1.0
Voltage/Frequency	115 V AC/60 Hz
Weight	35.0 lbs. (16 kg)
Parts & Labor Warranty	1 Year
Compressor Warranty	5 Years
UPC	761101057309
Freezer	
Door Swing	RHD
Reversible	Yes
Interior Height	14.38" (37 cm)
Interior Width	13.5" (34 cm)
Interior Depth	13.25" (34 cm)
Shelf Type	Wire
Shelf Qty	1
Thermostat Type	Dial
Refrigerant Type	R600a
Refrigerant Amount	0.8 oz.
High Side PSI	110.0
Low Side PSI	70.0
Level Legs	2
Compressor Step Height	8.5" (22 cm)
Compressor Step Width	13.5" (34 cm)
Compressor Step Depth	6.0" (15 cm)

