### accuc@ld

# **ARS15PV**



72" x 23.38" x 24.38" (H x W x D)

Performance series Pharma-Vac 15 cu.ft. upright allrefrigerator for vaccine storage, with antimicrobial silver-ion handle, and hospital grade cord with 'green dot' plug

#### **Highlights:**

Intelligent microprocessor digital temperature controller

Improved temperature accuracy with a separate temperature probe for continuous product readout to simulate stored product temperature

Powder-coated handle with naturally occurring silver ions to help reduce germ spread

#### **Product Features:**


Purpose-built design	Designed and purpose-built for pharmacy, medication, and vaccine applications to support meeting CDC/VFC/VFA guidelines	
+/-1°C Variation	The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period	
Antimicrobial silver ion-coated handle	Powder-coated handle with naturally occurring silver ions to help reduce the spread of germs	
Adjustable temperature	Intuitive controls let you adjust the interior temperature between +2 to +8°C	
Temperature alarm	Visual and audible alarms alert if the interior temperature rises or falls out of set range	
Remote alarm contacts	Electronic controller is equipped with a volt-free contact for alarm forwarding to an external remote system (contacts located in the external rear of the unit)	
Automatic defrost with adjustable cycle defrost	Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup	
Access port	Includes a pre-installed 1/2" probe hole in the right interior wall to allow easier connection to user-provided monitoring equipment	
Open door alarm	Alarm will sound if the door is left ajar for over 4 minutes (adjustable from 1-99 minutes)	

## accuc@ld

### **ARS15PV Specifications:**

Overview			
Nominal Height	72.0" (183 cm)		
Height of Cabinet	72.0" (183 cm)		
Nominal Width	24.0" (61 cm)		
Width	23.38" (59 cm)		
Width with Door Open	23.88" (61 cm)		
Nominal Depth	25.0" (64 cm)		
Depth	24.38" (62 cm)		
Depth with Handle	26.13" (66 cm)		
Depth with door at 90°	46.5" (118 cm)		
Capacity	15.0 cu.ft. (425 L)		
Defrost Type	Automatic		
Door	White		
Cabinet	White		
US Electrical Safety	ETL		
Canadian Electrical Safety	ETL-C		
Amps	1.4		
Voltage/Frequency	115 V AC/60 Hz		
Weight	200.0 lbs. (91 kg)		
Parts & Labor Warranty	2 Years		
Compressor Warranty	5 Years		
UPC	761101062617		
Refrigerator Features			
Door Swing	RHD		
Reversible	Yes		
Shelf Type	Wire		
Shelf Qty	7		
Adjustable Shelves	Yes		
Thermostat Type	Digital		
Thermostat Type Fan Type	Digital Interior		
Fan Type	Interior		
Fan Type Refrigerant Type	Interior R600a		
Fan Type Refrigerant Type Refrigerant Amount	Interior R600a 2.65oz.		
Fan Type Refrigerant Type Refrigerant Amount Interior Light	Interior R600a 2.65oz. Yes		
Fan Type Refrigerant Type Refrigerant Amount Interior Light Temperature Range	Interior R600a 2.65oz. Yes 2 to 8°C		
Fan Type Refrigerant Type Refrigerant Amount Interior Light Temperature Range Sound Level	Interior R600a 2.65oz. Yes 2 to 8°C		

Interior Depth	17.0" (43 cm)
Compressor Step Height	6.5" (17 cm)
Compressor Step Width	20.0" (51 cm)
Compressor Step Depth	5.0" (13 cm)

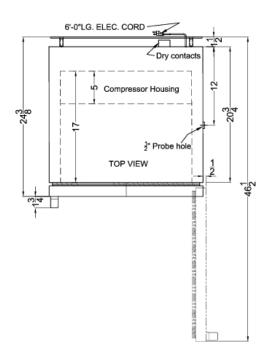

## accuc@ld

