accuc@ld

ARS23MLLH



83.75" x 27.5" x 31" (H x W x D)

Performance series Pharma-Lab 23 cu.ft. all-refrigerator in stainless steel with left hand door swing

Highlights:

Intelligent microprocessor digital temperature controller

Improved temperature accuracy with a separate temperature probe for continuous product readout

Additional sensor reads interior air temperature for superior temperature control

Product Features:

| Purpose-built design | Designed and engineered to store vaccines and other sensitive materials under stable temperature conditions | |
|---|---|--|
| Adjustable temperature | Interior is pre-set to 5°C, with an adjustable control range from 2 to 10°C | |
| Temperature alarm | Visual and audible alarms alert if the interior temperature rises or falls out of set range | |
| Complete stainless steel construction | Interior and exterior are entirely constructed from stainless steel for lasting durability and easy cleanup | |
| Forced air cooling | Top-mounted commercial fan ensures rapid temperature recovery | |
| Automatic defrost with adjustable cycle defrost | Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup | |
| Self-closing door | Closes to save energy but will remain open when the door is opened at a 90° angle for easier loading | |
| Open door alarm | Alarm will beep 3 times if the door is left open for 30 seconds, 5 times at 60 seconds, and will sound continuously if the door is open for more than 5 minutes | |
| Commercial grade casters | Ships with a set of casters (2 locking) for easy mobility as needed | |




accuc@ld

ARS23MLLH Specifications:

| Overview | | |
|-------------------------------|------------------------|--|
| Nominal Height | 84.0" (213 cm) | |
| Height of Cabinet | 83.75" (213 cm) | |
| Nominal Width | 28.0" (71 cm) | |
| Width | 27.5" (70 cm) | |
| Nominal Depth | 31.0" (79 cm) | |
| Depth | 31.0" (79 cm) | |
| Depth with Handle | 32.75" (83 cm) | |
| Depth with door at 90° | 56.5" (144 cm) | |
| Capacity | 23.0 cu.ft. (651 L) | |
| Defrost Type | Automatic | |
| Door | Stainless Steel | |
| Cabinet | Stainless Steel | |
| US Electrical Safety | UL | |
| Canadian Electrical Safety | ULC | |
| Sanitation | ETL-S | |
| Amps | 7.5 | |
| Voltage/Frequency | 115 V AC/60 Hz | |
| Weight | 282.0 lbs. (128 kg) | |
| Parts & Labor Warranty | 2 Years | |
| Compressor Warranty | 5 Years | |
| UPC | 761101066752 | |
| Refrigerator Features | | |
| Door Swing | LHD | |
| Reversible | No | |
| Shelf Type | Wire | |
| Shelf Qty | 4 | |
| Adjustable Shelves | Yes | |
| Thermostat Type | Digital | |
| Fan Type | Interior | |
| Refrigerant Type | R290 | |
| Refrigerant Amount | 2.5oz. | |
| High Side PSI | 290.0 | |
| Low Side PSI | 155.0 | |
| Wheel Qty | 4 | |
| Interior Light | Yes | |
| Temperature Range | 2 to 10°C | |
| Dimensions | | |

| Interior Height | 51.5" (131 cm) |
|-----------------|----------------|
| Interior Width | 23.5" (60 cm) |
| Interior Depth | 27.0" (69 cm) |

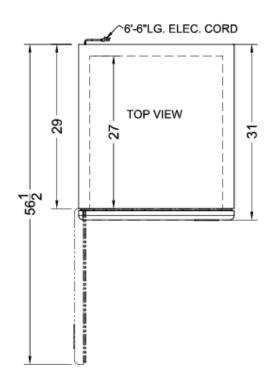

accuc@ld

