

FF7LBLKPUBCSS



34" x 23.75" x 23.5" (H x W x D)

Commercially approved built-in undercounter craft beer Pub Cellar with digital thermostat and stainless steel wrapped exterior

Highlights:

Commercially approved for use in food service establishments

Perfect for storing or aging craft beer for long-term use

Flexible design allows built-in or freestanding use

Product Features:

Commercially approved	ETL-S listed to NSF-7 Standards for use in commercial establishments	
Designed for craft beer storage	Wide range temperature control lets you manage the interior between 41° and 65°F for optimum storage of all types of beer	
Slim undercounter dimensions	Less than 24 inches wide, with a generous 5.5 c.f. of storage capacity	
Built-in capable	Make the best use of space by installing your appliance under the counter and flush with other cabinetry	
Wrapped stainless steel exterior	Durable elegance built to last	
Professional towel bar handle	A curved handle in brushed stainless steel provides generous room for a comfortable grip	
Factory installed lock	Keyed lock for a secure interior	
Digital thermostat	Exterior thermostat located in kickplate lets you manage the temperature without opening the door	
Automatic defrost	Reduced maintenance with auto defrost system	

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799






FF7LBLKPUBCSS Specifications:

Overview	
Height of Cabinet	33.5" (85 cm)
Height to Hinge Cap	34.0" (86 cm)
Width	23.75" (60 cm)
Depth	23.5" (60 cm)
Depth with Handle	25.25" (64 cm)
Depth with door at 90°	45.5" (116 cm)
Capacity	5.5 cu.ft. (156 L)
Defrost Type	Automatic
Door	Stainless Steel
Cabinet	Stainless Steel
US Electrical Safety	ETL
Canadian Electrical Safety	ETL-C
Sanitation	ETL-S
Amps	1.4
Voltage/Frequency	115 V AC/60 Hz
Weight	100.0 lbs. (45 kg)
Parts & Labor Warranty	1 Year
Compressor Warranty	5 Years
UPC	761101073125
	101101010123
Wine Cellar	701101073123
Wine Cellar Number of Zones	1
Number of Zones	1
Number of Zones Door Swing	1 RHD
Number of Zones Door Swing Reversible	1 RHD Factory Reversible
Number of Zones Door Swing Reversible Adjustable Shelves	1 RHD Factory Reversible Yes
Number of Zones Door Swing Reversible Adjustable Shelves Shelf Type	1 RHD Factory Reversible Yes Glass
Number of Zones Door Swing Reversible Adjustable Shelves Shelf Type Shelf Qty	1 RHD Factory Reversible Yes Glass 3
Number of Zones Door Swing Reversible Adjustable Shelves Shelf Type Shelf Qty Thermostat Type	1 RHD Factory Reversible Yes Glass 3 Digital
Number of Zones Door Swing Reversible Adjustable Shelves Shelf Type Shelf Qty Thermostat Type Interior Light	1 RHD Factory Reversible Yes Glass 3 Digital Yes
Number of Zones Door Swing Reversible Adjustable Shelves Shelf Type Shelf Qty Thermostat Type Interior Light Fan Type	1 RHD Factory Reversible Yes Glass 3 Digital Yes Exterior
Number of ZonesDoor SwingReversibleAdjustable ShelvesShelf TypeShelf QtyThermostat TypeInterior LightFan TypeRefrigerant Type	1 RHD Factory Reversible Yes Glass 3 Digital Yes Exterior R600a
Number of ZonesDoor SwingReversibleAdjustable ShelvesShelf TypeShelf QtyThermostat TypeInterior LightFan TypeRefrigerant TypeRefrigerant Amount	1 RHD Factory Reversible Yes Glass 3 Digital Yes Exterior R600a 0.64 oz.
Number of ZonesDoor SwingReversibleAdjustable ShelvesShelf TypeShelf QtyThermostat TypeInterior LightFan TypeRefrigerant TypeRefrigerant AmountHigh Side PSI	1 RHD Factory Reversible Yes Glass 3 Digital Yes Exterior R600a 0.64 oz. 180.0
Number of ZonesDoor SwingReversibleAdjustable ShelvesShelf TypeShelf QtyThermostat TypeInterior LightFan TypeRefrigerant TypeRefrigerant AmountHigh Side PSILow Side PSI	1 RHD Factory Reversible Yes Glass 3 Digital Yes Exterior R600a 0.64 oz. 180.0
Number of ZonesDoor SwingReversibleAdjustable ShelvesShelf TypeShelf QtyThermostat TypeInterior LightFan TypeRefrigerant TypeRefrigerant AmountHigh Side PSILow Side PSIInterior Height 1	1 RHD Factory Reversible Yes Glass 3 Digital Yes Exterior R600a 0.64 oz. 180.0 80.0 27.75" (70 cm)

Compressor Step Width	20.0" (51 cm)
Compressor Step Depth	6.0" (15 cm)
Level Legs	4
Temperature Range	41° to 65°F

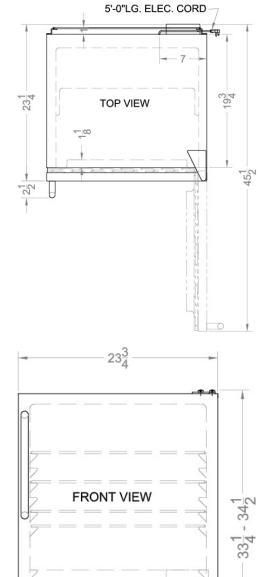



ELEC. CORD

18