## SUMMIT

# **SBC682NCFTWIN**



33.63" x 23.75" x 24" (H x W x D)

24" wide indoor/outdoor dual tap nitro cold brew coffee dispenser for built-in or freestanding commercial or residential use, with stainless steel exterior and caster set

#### **Highlights:**

Commercially approved to NSF-7 standards

Complete dual tap nitro coffee dispensing kit includes Nitrogen tank, regulator, and all the hardware needed to pour the perfect brew

Weatherproof construction for safe use in the outdoors

#### **Product Features:**

Dispenses nitro coffee	Stout style tap allows you to serve smooth nitro cold brew on tap	
Full-sized dispenser	5.6 cu.ft. interior can accept a full half barrel or quarter keg, or up to three sixth barrels or Cornelius style kegs	
Commercially approved	ETL-S listed to NSF-7 standards and meets UL-471 for use in commercial settings	
Weatherproof design	Solid 304 grade stainless steel construction allows placement in the outdoors	
Built-in capable	Front-breathing design allows fully recessed installation under counters	
Complete dual tap kit	Commercial grade tap kit includes a dual tap stainless steel draft tower, Nitrogen tank, regulator, and all the connection equipment you need to serve cold brew coffee	
Dual tap system	Twin draft tower allows you to serve from two 1/6 (sixtel) sized kegs	
Automatic defrost	Reduced user maintenance with auto defrost operation	
Digital thermostat	Electronic controls ensure easy temperature management, with an external readout in Celsius or Fahrenheit	






### **SBC682NCFTWIN Specifications:**

Nominal Height	34.0" (86 cm)	
Height of Cabinet	33.63" (85 cm)	
Nominal Width	24.0" (61 cm)	
Width	23.75" (60 cm)	
Nominal Depth	24.0" (61 cm)	
Depth	24.0" (61 cm)	
Depth with Handle	26.25" (67 cm)	
Depth with door at 90°	46.75" (119 cm)	
Capacity	5.6 cu.ft. (159 L)	
Defrost Type	Automatic	
Door	Stainless Steel	
Cabinet	Stainless Steel	
US Electrical Safety	ETL	
Canadian Electrical Safety	ETL-C	
Sanitation	ETL-S	
Energy Usage/Year	305.0kWh/year	
Amps	1.25	
Voltage/Frequency	115 V AC/60 Hz	
Weight	120.0 lbs. (54 kg)	
Parts & Labor Warranty	1 Year	
Compressor Warranty	5 Years	
UPC	761101084008	
Kegerator		
Door Swing	RHD	
Reversible	Yes	
Tap Kit	Yes	
Tap Kit Height with Tap	Yes 51.5" (131 cm)	
<del>`</del>		
Height with Tap	51.5" (131 cm)	
Height with Tap  Number of Taps	51.5" (131 cm)	
Height with Tap  Number of Taps  Adjustable Shelves	51.5" (131 cm) 2 Yes	
Number of Taps Adjustable Shelves Shelf Type	51.5" (131 cm) 2 Yes Chrome	
Height with Tap  Number of Taps  Adjustable Shelves  Shelf Type  Shelf Qty	51.5" (131 cm) 2 Yes Chrome	
Number of Taps  Adjustable Shelves  Shelf Type  Shelf Qty  Thermostat Type	51.5" (131 cm) 2 Yes Chrome 2 Digital	

High Side PSI	150.0
Low Side PSI	50.0
Inter Height	26.75" (68 cm)
Interior Width	20.0" (51 cm)
Interior Depth	19.0" (48 cm)
Level Legs Qty	4
Wheel Qty	4
Temperature Range	34°F to 68°F (1°C to 20°C)
Sound Level	34.0 db

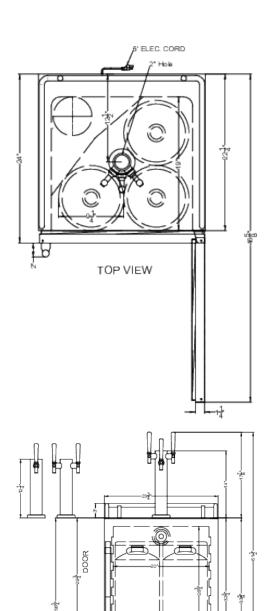





FRONT VIEW