SUMMIT

FF708BLSSIFADA



32.13" x 23.63" x 22.38" (H x W x D)

24" wide residential ENERGY STAR certified 5.3 cu.ft. ADA height all-refrigerator made in Europe with automatic defrost operation, panel-ready door, and deluxe black interior

Highlights:

Panel-ready door lets you customize the unit for a seamless look that integrates into your kitchen

32" height allows easy installation under lower ADA compliant counters

Full 5.3 cu.ft. capacity inside a convenient 24" footprint

Product Features:

24" wide European all-refrigerator	Freezerless refrigerator designed and manufactured in Europe for residential use	
ENERGY STAR certified	Rated by the DOE to perform with more efficiency than federal standards require, saving your unit energy and you on higher utility costs	
ADA Compliant height	32" height allows easy installation under lower ADA compliant counters	
Panel-ready door	Integrated stainless steel door frame allows you to mount full overlay panels over the door to create a custom look that can blend into cabinetry with no exposed frame (panel size: 23 5/16" W x 28 1/4" H and at least 3/4" thick; maximum weight: 10 lbs.)	
Large capacity	5.3 cu.ft. interior offers more storage space than units in this size class	
Slim counter height dimensions	Ideal 24" footprint for an easy fit	
Automatic defrost	No-frost operation for minimum user maintenance	
Adjustable glass shelves	Rearrange your refrigerator space to accommodate all shapes and sizes or remove shelves for a simple clean-up	
Bottle shelf included	Removable scalloped steel shelf lets you keep wine and other bottles stored horizontally	






FF708BLSSIFADA Specifications:

Nominal Height 32.0" (81 cm) Height of Cabinet 32.0" (81 cm) Height to Hinge Cap 32.13" (82 cm) Nominal Width 24.0" (61 cm) Width 23.63" (60 cm) Nominal Depth 23.0" (58 cm) Depth 22.38" (57 cm) Depth with Handle 24.0" (61 cm) Depth with door at 90° 44.25" (112 cm) Capacity 5.3 cu.ft. (150 L) Defrost Type Automatic Door Panel-Ready Cabinet Black US Electrical Safety ETL Canadian Electrical Safety ETL-C Safety ETL-C Energy Usage/Year 276.0kWh/year Amps 0.8 Voltage/Frequency 115 V AC/60 Hz Weight 100.0 lbs. (45 kg) Parts & Labor Warranty 1 Year			
Height to Hinge Cap 32.13" (82 cm) Nominal Width 24.0" (61 cm) Width 23.63" (60 cm) Nominal Depth 23.0" (58 cm) Depth 22.38" (57 cm) Depth with Handle 24.0" (61 cm) Depth with door at 90° 44.25" (112 cm) Capacity 5.3 cu.ft. (150 L) Defrost Type Automatic Door Panel-Ready Cabinet Black US Electrical Safety ETL Canadian Electrical Safety ETL-C Safety ETL-C Energy Usage/Year 276.0kWh/year Amps 0.8 Voltage/Frequency 115 V AC/60 Hz Weight 100.0 lbs. (45 kg)			
Nominal Width 24.0" (61 cm) Width 23.63" (60 cm) Nominal Depth 23.0" (58 cm) Depth 22.38" (57 cm) Depth with Handle 24.0" (61 cm) Depth with door at 90° 44.25" (112 cm) Capacity 5.3 cu.ft. (150 L) Defrost Type Automatic Door Panel-Ready Cabinet Black US Electrical Safety ETL Canadian Electrical Safety ETL-C Energy Usage/Year 276.0kWh/year Amps 0.8 Voltage/Frequency 115 V AC/60 Hz Weight 100.0 lbs. (45 kg)			
Width 23.63" (60 cm) Nominal Depth 23.0" (58 cm) Depth 22.38" (57 cm) Depth with Handle 24.0" (61 cm) Depth with door at 90° 44.25" (112 cm) Capacity 5.3 cu.ft. (150 L) Defrost Type Automatic Door Panel-Ready Cabinet Black US Electrical Safety ETL Canadian Electrical Safety ETL-C Safety ETL-C Energy Usage/Year 276.0kWh/year Amps 0.8 Voltage/Frequency 115 V AC/60 Hz Weight 100.0 lbs. (45 kg)			
Nominal Depth 23.0" (58 cm) Depth 22.38" (57 cm) Depth with Handle 24.0" (61 cm) Depth with door at 90° 44.25" (112 cm) Capacity 5.3 cu.ft. (150 L) Defrost Type Automatic Door Panel-Ready Cabinet Black US Electrical Safety ETL Canadian Electrical Safety ETL-C Safety Energy Usage/Year 276.0kWh/year Amps 0.8 Voltage/Frequency 115 V AC/60 Hz Weight 100.0 lbs. (45 kg)			
Depth 22.38" (57 cm) Depth with Handle 24.0" (61 cm) Depth with door at 90° 44.25" (112 cm) Capacity 5.3 cu.ft. (150 L) Defrost Type Automatic Door Panel-Ready Cabinet Black US Electrical Safety ETL Canadian Electrical Safety ETL-C Safety Energy Usage/Year 276.0kWh/year Amps 0.8 Voltage/Frequency 115 V AC/60 Hz Weight 100.0 lbs. (45 kg)			
Depth with Handle 24.0" (61 cm) Depth with door at 90° 44.25" (112 cm) Capacity 5.3 cu.ft. (150 L) Defrost Type Automatic Door Panel-Ready Cabinet Black US Electrical Safety ETL Canadian Electrical Safety ETL-C Safety Energy Usage/Year 276.0kWh/year Amps 0.8 Voltage/Frequency 115 V AC/60 Hz Weight 100.0 lbs. (45 kg)			
Depth with door at 90° 44.25" (112 cm) Capacity 5.3 cu.ft. (150 L) Defrost Type Automatic Door Panel-Ready Cabinet Black US Electrical Safety ETL Canadian Electrical Safety Energy Usage/Year 276.0kWh/year Amps 0.8 Voltage/Frequency 115 V AC/60 Hz Weight 100.0 lbs. (45 kg)			
Capacity 5.3 cu.ft. (150 L) Defrost Type Automatic Door Panel-Ready Cabinet Black US Electrical Safety ETL Canadian Electrical Safety Energy Usage/Year 276.0kWh/year Amps 0.8 Voltage/Frequency 115 V AC/60 Hz Weight 100.0 lbs. (45 kg)			
Defrost Type Automatic Door Panel-Ready Cabinet Black US Electrical Safety ETL Canadian Electrical Safety Energy Usage/Year 276.0kWh/year Amps 0.8 Voltage/Frequency 115 V AC/60 Hz Weight 100.0 lbs. (45 kg)			
Door Panel-Ready Cabinet Black US Electrical Safety ETL Canadian Electrical Safety Energy Usage/Year 276.0kWh/year Amps 0.8 Voltage/Frequency 115 V AC/60 Hz Weight 100.0 lbs. (45 kg)			
Cabinet Black US Electrical Safety ETL Canadian Electrical Safety Energy Usage/Year 276.0kWh/year Amps 0.8 Voltage/Frequency 115 V AC/60 Hz Weight 100.0 lbs. (45 kg)			
US Electrical Safety ETL Canadian Electrical Safety Energy Usage/Year 276.0kWh/year Amps 0.8 Voltage/Frequency 115 V AC/60 Hz Weight 100.0 lbs. (45 kg)			
Canadian Electrical Safety Energy Usage/Year 276.0kWh/year Amps 0.8 Voltage/Frequency 115 V AC/60 Hz Weight 100.0 lbs. (45 kg)			
Safety 276.0kWh/year Energy Usage/Year 276.0kWh/year Amps 0.8 Voltage/Frequency 115 V AC/60 Hz Weight 100.0 lbs. (45 kg)			
Amps 0.8 Voltage/Frequency 115 V AC/60 Hz Weight 100.0 lbs. (45 kg)			
Voltage/Frequency 115 V AC/60 Hz Weight 100.0 lbs. (45 kg)			
Weight 100.0 lbs. (45 kg)			
Parts & Labor Warranty 1 Year			
,			
Compressor Warranty 5 Years			
UPC 761101103099			
Refrigerator Features			
Door Swing RHD			
Reversible Factory Reversible			
Crisper Qty 1			
Crisper Finish Transparent			
Crisper Cover Glass			
Shelf Type Glass and Scalloped			
Shelf Qty 3			
Adjustable Shelves Yes			
Wine Bottle Shelves Yes			
Thermostat Type Dial			
Refrigerant Type R600a			
Refrigerant Amount 0.64oz.			
Level Legs Qty 2			
Interior Light Yes			

Temperature Range	36 to 46°F		
Sound Level	32.6 dBa		
Dimensions			
Interior Height	27.75" (70 cm)		
Interior Width	21.0" (53 cm)		
Interior Depth	18.0" (46 cm)		
Compressor Step Height	5.5" (14 cm)		
Compressor Step Width	21.0" (53 cm)		
Compressor Step Depth	6.0" (15 cm)		

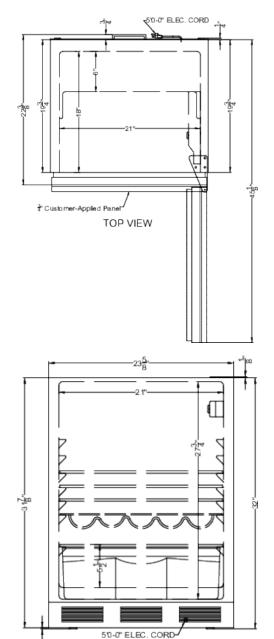

FRONT VIEW



