

# SBC7BRSIFLHD



#### 33.5" x 23.63" x 22.38" (H x W x D)

24" wide commercially approved beer dispenser made in Europe with a twin tap kit to store and serve from two 1/6 kegs; includes panel-ready door, adjustable legs, and caster set for optional mobility

#### **Highlights:**

Made in Europe

Dual tap system lets you serve from two sixtel kegs

Panel-ready door lets you customize the unit to best match your style

### **Product Features:**

| 24" Wide Beer Dispenser                                    | Kegerator includes all of the equipment you need to serve beer from two sixtel kegs   |  |
|--|---|--|
| Made in Europe & the USA                                   | Refrigeration unit is constructed in Europe and designed and modified in the USA  |  |
| Versatile use  | Approved for both residential and commercial settings   |  |
| Commercially listed  | ETL-S listed to ANSI-NSF Standard 7 for commercial use  |  |
| Panel-ready door   | Integrated stainless steel door frame allows you to mount full overlay panels over the door to create a custom look that can blend into cabinetry with no exposed frame (panel size: 23 5/16" W x 28 1/4" H and at least 3/4" thick; maximum weight: 10 lbs.) |  |
| Complete beer tap kit included                             | Includes a 5 lb. CO2 tank and regulator, dual tap draft arm, Sankey American tap, and connection hardware   |  |
| Dual tap system  | Twin draft tower allows you to serve from two 1/6 (sixtel) sized kegs   |  |
| Slim counter height dimensions for rec or freestanding use | essed Ideal 24" footprint for an easy fit   |  |
| Height adjustable  | Adjustable legs allow you to set the height anywhere between 33.5" and 34.5" to best fit under your counter   |  |

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

info@summitappliance.com






## SBC7BRSIFLHD Specifications:

| Overview                      |                        |  |
|-------------------------------|------------------------|--|
| Nominal Height                | 34.0" (86 cm)          |  |
| Height of Cabinet             | 33.5" (85 cm)          |  |
| Nominal Width                 | 24.0" (61 cm)          |  |
| Width                         | 23.63" (60 cm)         |  |
| Nominal Depth                 | 23.0" (58 cm)          |  |
| Depth                         | 22.38" (57 cm)         |  |
| Depth with door at 90°        | 44.25" (112 cm)        |  |
| Capacity                      | 5.3 cu.ft. (150 L)     |  |
| Defrost Type                  | Automatic              |  |
| Door                          | Integrated Frame       |  |
| Cabinet                       | Black                  |  |
| US Electrical Safety          | ETL                    |  |
| Canadian Electrical<br>Safety | ETL-C                  |  |
| Sanitation                    | ETL-S                  |  |
| Energy Usage/Year             | 293.0kWh/year          |  |
| Amps                          | 0.8                    |  |
| Voltage/Frequency             | 115 V AC/60 Hz         |  |
| Weight                        | 100.0 lbs. (45 kg)     |  |
| Parts & Labor Warranty        | 1 Year                 |  |
| Compressor Warranty           | 5 Years                |  |
| UPC                           | 761101106281           |  |
| Kegerator                     |                        |  |
| Door Swing                    | LHD                    |  |
| Reversible                    | No                     |  |
| Height Adjustable             | Yes                    |  |
| Tap Kit                       | Yes                    |  |
| Number of Taps                | 2                      |  |
| Adjustable Shelves            | Yes                    |  |
| Shelf Type                    | Glass and<br>Scalloped |  |
| Shelf Qty                     | 4                      |  |
| Thermostat Type               | Dial                   |  |
| Interior Light                | Yes                    |  |
| Refrigerant                   | R600a                  |  |
| Refrigerant Amount            | 0.64 oz.               |  |
| Inter Height                  | 27.75" (70 cm)         |  |
| Interior Width                | 21.0" (53 cm)          |  |
| Interior Depth                | 18.0" (46 cm)          |  |
|                               |                        |  |

| Compressor Step<br>Height | 5.5" (14 cm)  |
|---------------------------|---------------|
| Compressor Step Width     | 21.0" (53 cm) |
| Compressor Step Depth     | 6.0" (15 cm)  |
| Level Legs Qty            | 4             |
| Wheel Qty                 | 4             |
| Temperature Range         | 36 to 46°F    |
|                           |               |

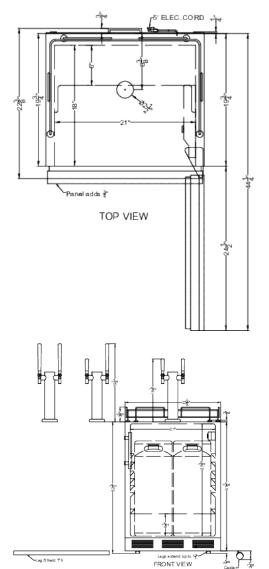

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

