

ACR1322GNSF456



64.88" x 23.38" x 28" (H x W x D)

Upright healthcare all-refrigerator certified to NSF/ANSI 456 with self-closing glass door, front lock, digital controls, and NIST-calibrated temperature readout

Highlights:

Certified to NSF/ANSI 456 Vaccine Storage Standard

Specially designed to meet current CDC/VFC/VFA vaccine refrigeration guidelines for convenient storage in pharmacies, medical offices, and other healthcare facilities

www.summitappliance.com

Designed and constructed for reliable cold storage in healthcare facilities

Product Features:

EQTemp Medical Refrigerator	All-refrigerator designed to operate between 2 and 8°C for a variety of storage application in medical offices and other healthcare facilities	
Certified to NSF/ANSI 456 Vaccine Storage Standard	Tested to comply with the latest standards	
Certificate of calibration included	The temperature monitoring device (TMD) is calibrated to NIST standards in our ISO/IEC 17025:2017 certified calibration laboratory and ships with a 2-year certificate of calibration for your records	
Large capacity	Full 12.71 cu.ft. capacity inside conveniently slim footprint	
Temperature Range: 2º to 8ºC	Preset to 5°C as recommended for many storage applications	
Buffered temperature probe	Thermometer probe is encased in a glass bead-filled bottle and stored in a fixed box on the center shelf. This is the ideal way to produce temperature readings closest to stored contents, as recommended by the CDC, VFC and VFA's guidelines	
High/low temperature alarm	Thermometer probe is encased in a glass bead-filled bottle and stored in a fixed box on the center shelf. This is the ideal way to produce temperature readings closest to stored contents, as recommended by the CDC, VFC and VFA's guidelines	
External temperature readout	Audible alarm sounds if the interior temperature rises or falls out of set range	
SUMMIT APPLIANCE DIVISION. FELIX STORCI	H. INC. LISO 9001:2015 Certified	


Fractarys installed book, NY 10474 USA TEL 718-89 Keyord Fracksfor 47 85 8739 re interio keyo disolarded bilance.com



ACR1322GNSF456 Specifications:


Overview			
Nominal Height	65.0" (165 cm)		
Height of Cabinet	64.88" (165 cm)		
Nominal Width	24.0" (61 cm)		
Width	23.38" (59 cm)		
Width with Door Open	23.63" (60 cm)		
Nominal Depth	28.0" (71 cm)		
Depth	28.0" (71 cm)		
Depth with door at 90°	50.0" (127 cm)		
Capacity	12.71 cu.ft. (360 L)		
Defrost Type	Automatic		
Door	Glass		
Cabinet	White		
US Electrical Safety	ETL		
Canadian Electrical Safety	ETL-C		
Sanitation	ETL-S to NSF 456		
Amps	2.0		
Voltage/Frequency	115 V AC/60 Hz		
Weight	169.0 lbs. (77 kg)		
Parts & Labor Warranty	1 Year		
Compressor Warranty	5 Years		
UPC	761101083179		
Refrigerator Features			
Door Swing	RHD		
Reversible	Factory Reversible		
Shelf Type	Wire		
Shelf Qty	5		
Adjustable Shelves	Yes		
Thermostat Type	Digital		
Fan Type	Interior		
Refrigerant Type	R600a		
Refrigerant Amount	2.0oz.		
High Side PSI	1.45		
Low Side PSI	0.85		
Level Legs Qty	2		
Interior Light	Yes		
Temperature Range	2º to 8ºC		
Sound Level	38.9 dB		

Dimensions	
Interior Height	56.5" (144 cm)
Interior Width	20.0" (51 cm)
Interior Depth	21.5" (55 cm)
Compressor Step Height	9.0" (23 cm)
Compressor Step Width	20.0" (51 cm)
Compressor Step Depth	8.0" (20 cm)

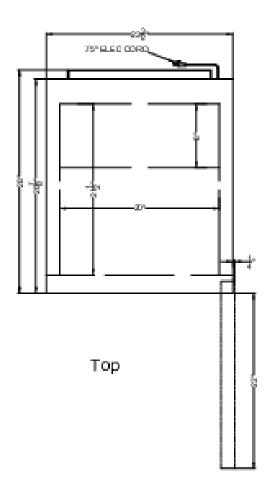





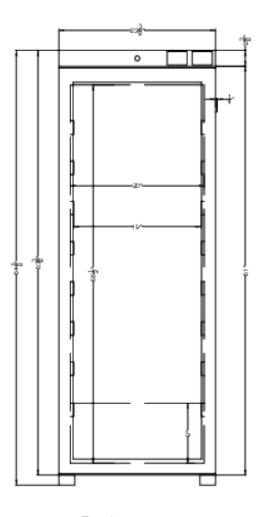

Front