

URM19W



72" x 30.5" x 27.63" (H x W x D)

Upright manual defrost refrigerator with lock and external alarm/thermometer for general purpose storage applications

Highlights:

- General purpose refrigerator designed for the storage of samples, enzymes, reagents, and other laboratory and clinical materials that require a more stable interior than traditional automatic defrost
- Static cooling system with manual defrost to ensure a more stable interior
- Factory-installed lock provides security you can count on

Product Features:


| | |
|------------------------------|--|
| Upright All-Refrigerator | Large capacity refrigerator with front-opening design and manual defrost operation |
| Large capacity | More than 18 cu.ft. of interior space |
| Manual defrost | Static cooling system with no fans or warming cycles |
| Dial thermostat | Intuitive and reliable mechanical thermostat located inside the unit to prevent unnecessary adjustments |
| High/low temperature alarm | Audible alarm sounds if the interior temperature rises or falls out of set range |
| External temperature readout | Includes continuous display of the current interior and high/low temperature, and can be switched from Celsius to Fahrenheit at the touch of a button |
| Buffered temperature probe | Thermometer probe is encased in a glass bead-filled bottle and stored in a fixed box on the center shelf. This is the ideal way to produce temperature readings closest to stored contents |
| Access port | 3/8" probe hole with cover is pre-installed in unit's side to allow easy installation of user-provided monitoring equipment |
| Cantilevered shelving | Tight pilaster spacing throughout the interior allows you to adjust the shelf positions to meet your exact storage needs |

URM19W Specifications:


| Overview | |
|----------------------------|---------------------|
| Height of Cabinet | 72.0" (183 cm) |
| Width | 30.5" (77 cm) |
| Depth | 27.63" (70 cm) |
| Depth with Handle | 30.25" (77 cm) |
| Depth with door at 90° | 55.38" (141 cm) |
| Capacity | 18.3 cu.ft. (518 L) |
| Defrost Type | Manual |
| Door | White |
| Cabinet | White |
| US Electrical Safety | ETL |
| Canadian Electrical Safety | ETL-C |
| Sanitation | ETL-S |
| Amps | 2.7 |
| Voltage/Frequency | 115 V AC/60 Hz |
| Weight | 215.0 lbs. (98 kg) |
| Parts & Labor Warranty | 1 Year |
| Compressor Warranty | 5 Years |
| UPC | 761101106762 |
| Refrigerator Features | |
| Door Swing | RHD |
| Reversible | Factory Reversible |
| Shelf Type | Wire |
| Shelf Qty | 4 |
| Full Door Shelf Qty | 4 |
| Thermostat Type | Dial |
| Refrigerant Type | R290a |
| Refrigerant Amount | 3.88oz. |
| High Side PSI | 280.0 |
| Low Side PSI | 145.0 |
| Interior Light | Yes |
| Temperature Range | 1 to 10°C |
| Dimensions | |
| Interior Height | 64.0" (163 cm) |
| Interior Width | 25.25" (64 cm) |
| Interior Depth | 21.0" (53 cm) |
| Compressor Step Height | 9.25" (23 cm) |
| Compressor Step Width | 25.25" (64 cm) |

Compressor Step Depth

7.25" (18 cm)

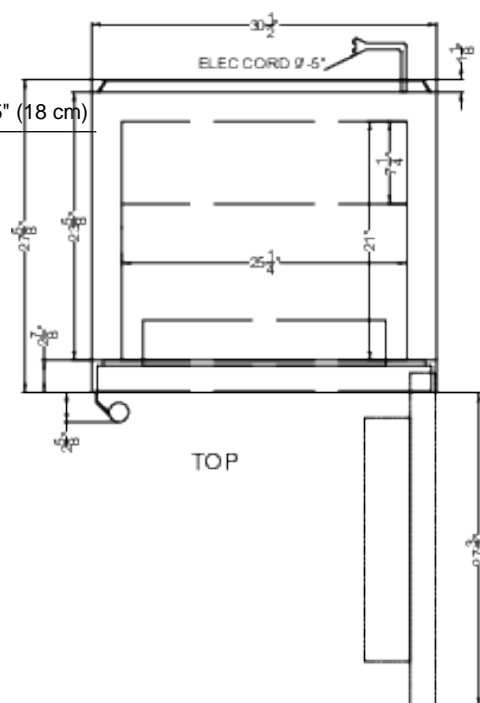

TOP

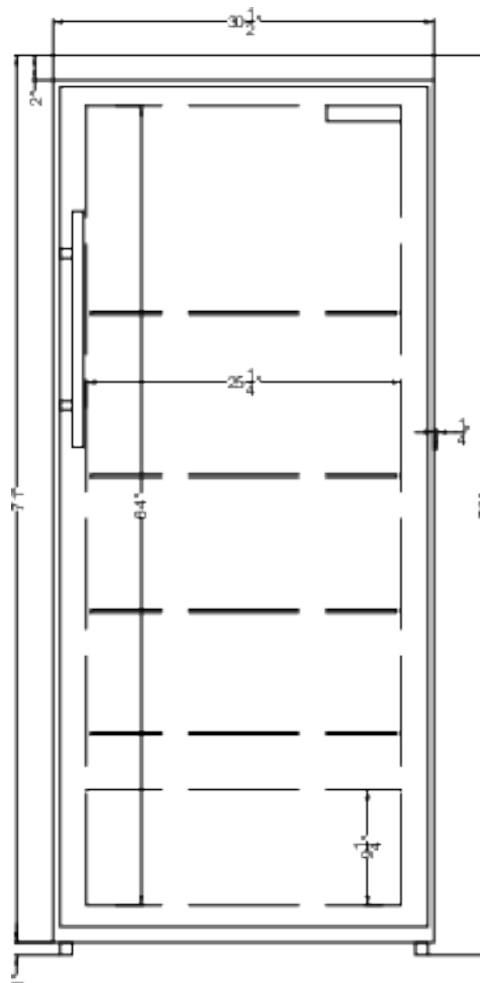

FRONT