accucold

FF28L



24.88" x 18.5" x 17.75" (H x W x D)

DISCONTINUED: Replaced by FF28LWH

Highlights:

Compact size is ideal for use on top of counters

Save time and energy with low maintenance automatic defrost

Factory-installed lock provides security you can count on

Product Features:


Automatic defrost	Reduced maintenance with auto defrost system
Compact dimensions	Ideal size for countertop use
Fully finished cabinet	Allows the refrigerator to be used as a freestanding model
Factory installed lock	Keyed lock for secure interior
Adjustable shelves	Rearrange refrigerator space to accommodate all sizes or remove shelves for simple cleanup
Door storage	Store items right on the door for easy access
One piece interior liner	Easy clean-up with a one piece liner that won't hold a mess in hidden crevices
Reversible door	User reversible door swing
Adjustable thermostat	Manage the temperature with ease and accuracy



accucold

FF28L Specifications:

Overview		
Height of Cabinet	24.63" (63 cm)	
Height to Hinge Cap	24.88" (63 cm)	
Width	18.5" (47 cm)	
Depth	17.75" (45 cm)	
Depth with door at 90°	34.63" (88 cm)	
Capacity	2.4 cu.ft. (68 L)	
Defrost Type	Automatic	
Door	White	
Cabinet	White	
US Electrical Safety	ETL	
Canadian Electrical Safety	ETL-C	
Energy Usage/Year	350.0kWh/year	
Amps	1.3	
Voltage/Frequency	115 V AC/60 Hz	
Weight	50.0 lbs. (23 kg)	
Parts & Labor Warranty	1 Year	
Compressor Warranty	5 Years	
UPC	761101002286	
Refrigerator Features		
Door Swing	RHD	
Reversible	Yes	
Shelf Type	Wire	
Shelf Qty	2	
Full Door Shelf Qty	2	
Adjustable Shelves	Yes	
Thermostat Type	Dial	
Refrigerant Type	R134a	
Refrigerant Amount	1.3oz.	
High Side PSI	261.0	
Low Side PSI	103.0	
Level Legs Qty	2	
Dimensions		
Interior Height	21.5" (55 cm)	
Interior Width	16.0" (41 cm)	
Interior Depth	13.5" (34 cm)	
Compressor Step Height	7.75" (20 cm)	
Compressor Step Width	16.0" (41 cm)	
Compressor Step Depth	5.0" (13 cm)	

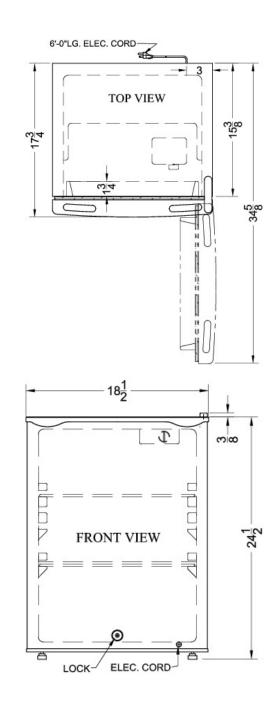

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

