

Installing the Dual Cocktail Tap Kit

(for non-carbonated cocktails)

Model:

KITCKT2

The tap kit is pre-assembled for easy installation. Users only need to connect the ball lock fittings to the keg(s).

Included:

- Tower (1)
- Handle (2)
- Screws (4)
- Empty N₂ Tank (1)
- Outlet Ball Lock Fitting (2)
- Inlet Ball Lock Fitting (2)

Note: Your N₂ tank is shipped empty to avoid any possible accidents during transportation. Have your gas supplier fill the gas tank. Before installation, please read and understand all gas tank handling procedures.

Note:

- The tap should not be used for milk.
- When replacing your keg, first turn off the safety switch on the N₂ regulator valve and remove the coupler to remove the kegs.
- When replacing the N₂ gas tank, remember to turn off the main switch of the gas tank and the safety switch on the regulator valve. Afterward, use a wrench to loosen the hexagonal nut port connecting the regulator valve with the gas tank. Then, use a wrench to remove the fixed bolt securing the gas tank, and carefully remove the tank.
- During the installation process, be sure that all parts are connected tightly and that there are no gas leaks.
- When connecting the hose to the connection port, you can dip the ends into warm water to make the connection easier.
- If the high-pressure compressed gas in the N₂ gas tank is not handled properly, it could be dangerous.
- Make a note of the D.O.T. testing date on the tank's neck before installation. If it is more than 5 years old, do not use the product. Return it to the gas supplier.
- Keep gas tank away from heat sources. Unused tanks should be placed upright in a cool, ventilated place (preferably at 70°F).

Installing the N₂ Regulator to the N₂ Tank: (for still cocktails)

1. Ensure the tower dispenser is closed.
2. Ensure the N₂ tank is full. (All gas tanks are shipped empty.)
3. Screw the **N₂ regulator** on to the **N₂ tank valve**. Use an adjustable wrench to tighten the nut securely to prevent gas leaks.
4. Connect one of the **N₂ gas lines** by firmly pressing the **ball lock fitting** onto the keg's **gas inlet** until it clicks into place.
5. Connect one of the the **cocktail lines** from the tower to the keg by firmly pressing the ball lock fitting onto the keg's **liquid outlet** until it clicks into place.
6. Repeat steps 4 & 5 for the second keg.
7. Open the gas tank valve fully to check for leaks by turning the knob counterclockwise.
8. For non-carbonated cocktails, set the N₂ output pressure between **5 and 10 psi**.
9. Lock the regulator setting by tightening the locknut on the pressure screw.

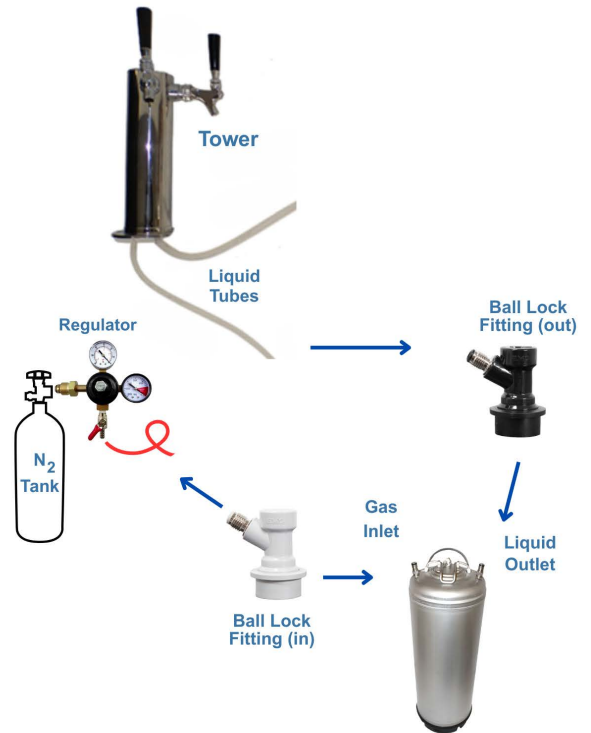


Image varies by model.*

Note: Agitate the kegs before serving to keep the cocktails from separating.

Placing the Keg and Final Setup

1. Lift the kegs by the handles and gently place them inside the unit.
2. Arrange the tubing neatly behind the kegs to ensure the door can close properly.
3. Screw the handles onto the tower taps.

If you need help with your installation call our Customer Service facility at **800-932-4267 (Ext. 513)** between 9:00 AM and 5:00 PM ET or visit our website summitappliance.com/support at any time. We will do our best to answer your questions.

To order replacement parts, visit our website: summitapplianceparts.com

Summit Appliance Division · Felix Storch, Inc. · www.summitappliance.com · 718-893-3900 · info@summitappliance.com