

accucold

Professional Cold Storage

Precise • Stable • Efficient • Whisper Quiet



Designed and Purpose-Built for

PHARMACY • MEDICAL • LIFE SCIENCE
LABORATORY • PHARMACEUTICAL • BIOTECH



ACCUCOLD DIVISION, FELIX STORCH, INC. • ISO 9001 CERTIFIED • 888.4.MEDLAB • INFO@ACCUCOLD.COM • ACCUCOLD.COM

The Accucold Difference

Accucold, a division of Felix Storch, Inc., specializes in manufacturing purpose-built refrigeration products for the medical, pharmaceutical, laboratory, and institutional industries. Our extensive product selection offers a range of cooling solutions, from basic locking compact refrigerators to built-in vaccine storage units specially designed to comply with **CDC and VFC guidelines with rapid shipping of stocked products.** We are **ISO 9001:2015 certified** and maintain an **ISO/IEC 17025:2017 certified** calibration laboratory for our monitoring equipment, including the industry's largest selection of equipment certified to the **NSF/ANSI 456 Vaccine Storage Standard.**

MED/LAB/PHARMACY REFRIGERATION

Performance Series Highlights.....	3
About the Performance Series	4
New Options for Optimized Storage & Security.....	5
Pharma-Vac Performance Series Refrigerators	6-7
Pharma-Vac Series Approved to NSF/ANSI 456 Vaccine Storage Standard	8-9
Pharma-Vac Performance Series Freezers	10-11
Pharma-Lab Performance Series Refrigerators & Freezers.....	12-13
Med-Lab Performance Series Refrigerators.....	14-15
Manual Defrost All-Freezers & All-Refrigerators.....	16
Stacked Refrigerator-Freezer Combinations.....	17
Ultra Low Temperature Freezers	18
Low Temperature Chest Freezers.....	19
Controlled Room Temperature Cabinets	20-21
BOD Refrigerated/Heated Incubators	22-23

PATIENT CARE/HOSPITAL/BREAK ROOM

Icemakers & Ice/Water Dispensers.....	24
JCAHO Compliant Nutrition Centers.....	25
Break Room Series Refrigerator-Freezers.....	26
Microwaves & Microwave-Refrigerators.....	27
MOMCUBE® Series Breast Milk Refrigeration.....	28-29
PureTherm Blanket Warmers.....	30
Portable Refrigerator/Freezers.....	31

GENERAL PURPOSE/NSF-7 REFRIGERATION

Healthcare & General Purpose Refrigerators & Freezers (Compact/Undercounter)	32
Healthcare & General Purpose Refrigerators & Freezers (Mid/Full-Size)	33

PRODUCT OPTIONS & ACCESSORIES..... 34-35

COMING SOON..... 36


SERVICES & PRODUCT SUPPORT..... 37

RESOURCES..... 38

Performance Series Refrigeration

Solid & glass door choices from 1 to 49 cu.ft.

Purpose-built with advanced features to help support CDC and VFC guidelines for proper vaccination storage:

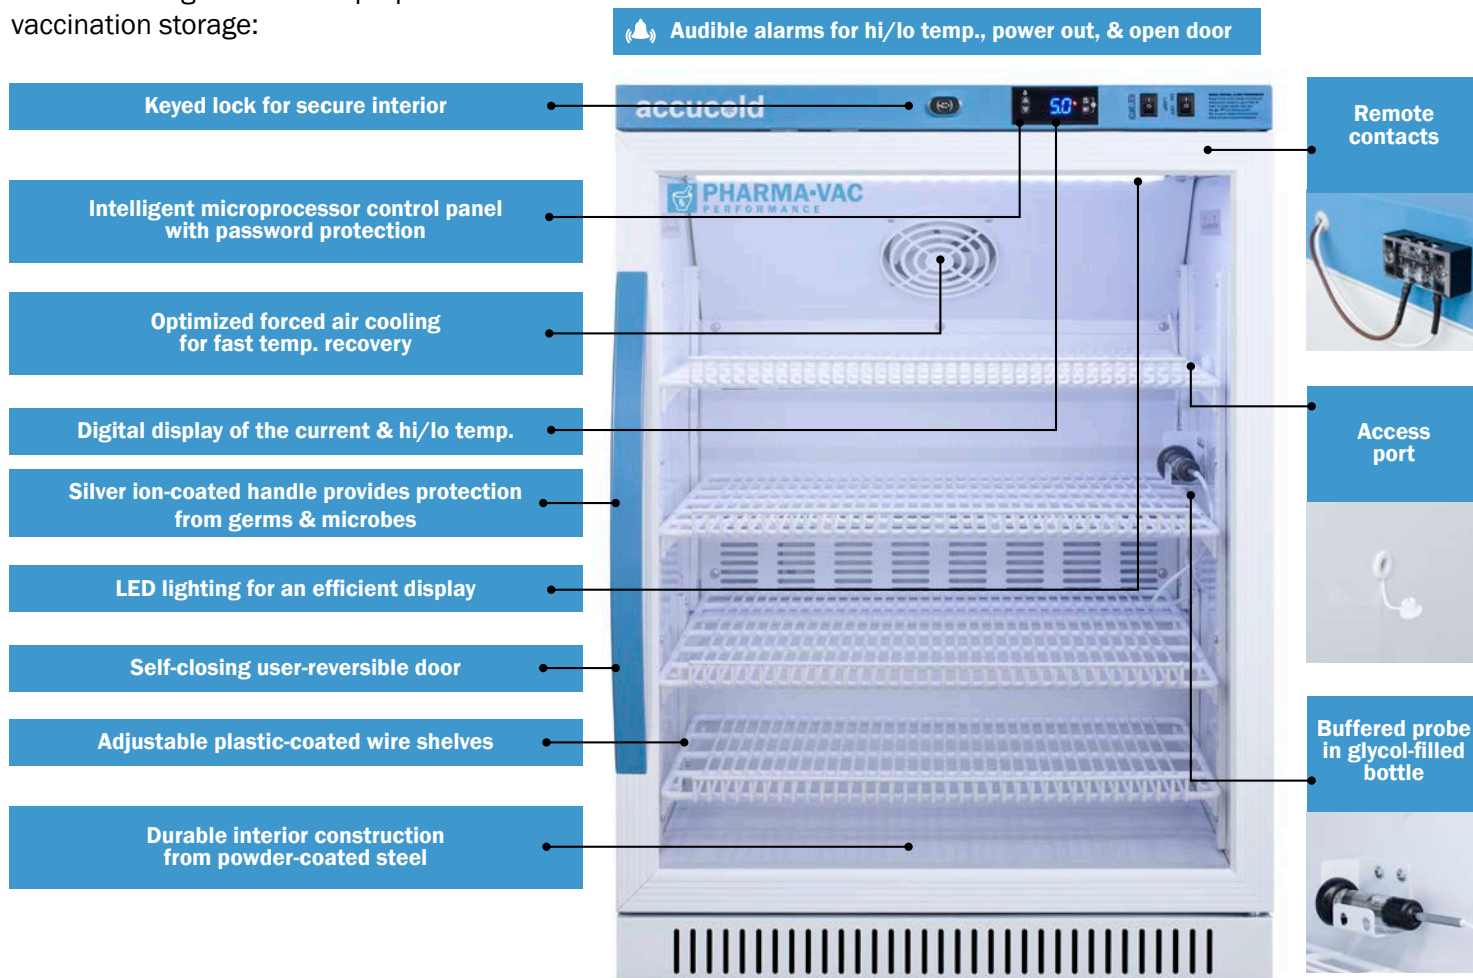

EXTENDED WARRANTY
• 2-year parts & labor
• 5-year compressor



ECO-FRIENDLY
Environmentally friendly
hydrocarbon refrigerants



COMPATIBLE
with Pyxis®, Omnicell®,
& AcuDose RX®



ADA OPTION
32" high choices
for use under lower
ADA compliant counters

Adjustable operating control range: 2 to 8°C • Temperature variation: +/- 1°C*

*The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24-hour test period

MED/LAB/PHARMACY REFRIGERATION

Accucold's Performance Series features purpose-built equipment specially designed and constructed to meet the demanding storage needs of medical, laboratory, vaccine, and life science applications.

Performance Series


**Professional Grade Performance
for Pharmacy, Patient Care,
Life Science, & Laboratories**



Advanced Temperature Control


Stability and Uniformity - Intelligent control system utilizes an advanced system design to ensure limited deviations from the setpoint and uniform temperatures throughout the entire unit.

Rapid Recovery - Optimized air flow for fast temperature recovery after door openings.

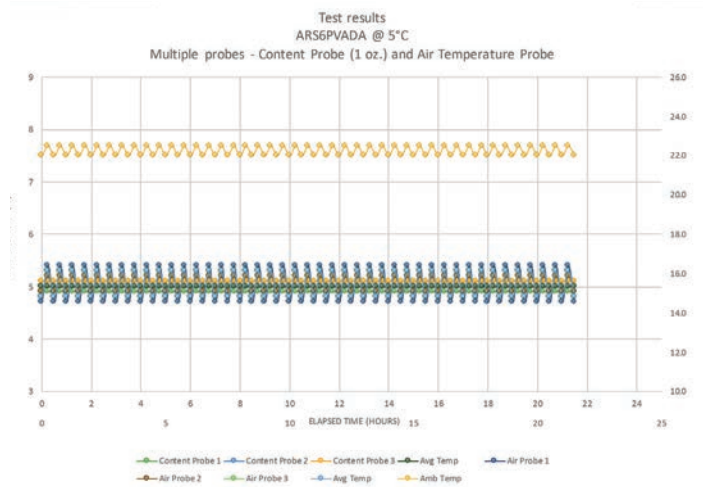

Whisper QUIET


Noise Reduction Design - Preferred by noise-sensitive areas of a pharmacy, patient care facility, or laboratory. Accucold's Performance Series refrigerators are up to 3x quieter than traditional models.

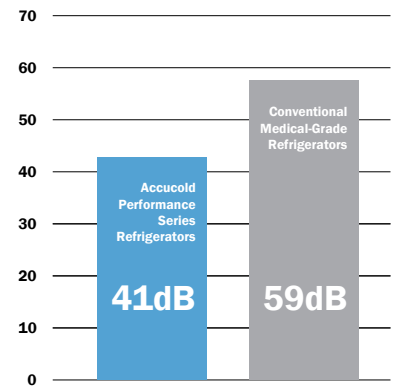

Green Natural Refrigerants


Earth-Saving Natural refrigerants are environmentally-friendly with no impact on ozone depletion and minimal global warming potential.

Global Warming Potential (GWP) of Used Refrigerant

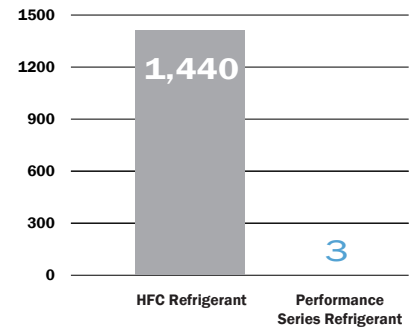

Energy Conservation

Energy Savings - Natural refrigerators provide up to a 15% reduction in energy use. When combined with intelligent control, advanced system design, and optimized air flow, this results in potentially more than 50% in energy savings over competitive units.

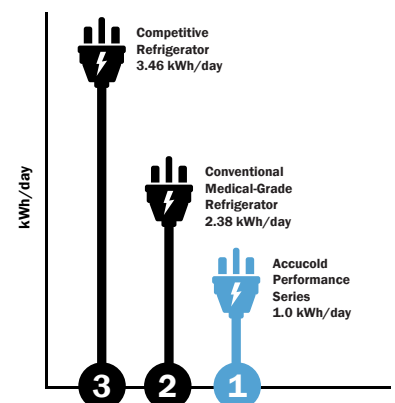

New Options for Optimized Storage & Security

Ventilated Drawers

Full-extension removable drawers made from powder-coated aluminum, factory-installed in any 24" wide Pharma-Vac or Med-Lab refrigerator



Suffix "DR"

Locker Compartments

Interior lockers secured by combination locks for separated storage. Staff can set their own security code and override with provided keys



Suffix "Locker"

Keyless Access Locks

No keys required with a keypad security system that allows you to program up to 19 codes to accommodate your staff. Available as a factory-installed option on all Performance Series units



Add Option "KAL"

Digital Data Loggers

NIST calibrated loggers now available for wifi/bluetooth enabled notifications, as well as our original USB design. All DDLs ship with a certificate of calibration and feature an external readout of the current and min/max temperatures.



USB Logger: Add Option "DL2B"
Single Channel WiFi: Add Option "DL11BWiFi"
Dual Channel WiFi: Add Option "DL22BWiFi"

■ All units can be combined with Accucold freezers using our stacking racks

*Specifications are subject to change without notice. For the most current information, visit accucold.com

Pharma-Vac Performance Series Refrigerators

Purpose-built for pharmacy, medication, and vaccination applications to support meeting CDC/VFC vaccine storage guidelines



Countertop



ADA



Undercounter



Full Sized



Advanced Temperature Control

Intelligent microprocessor digital temperature controller
Improved temperature accuracy with a buffered probe in glycol-filled bottle to simulate temperature of stored product

Additional sensor reads interior air temperature for superior temperature control

Adjustable operating control range from +2°C to +8°C (+35.6°F to +46.4°F)

Digital display of the min/max temperature (updated in 15 minute increments)

Temperature viewable in Celsius and Fahrenheit to the nearest tenth of a degree

Password protection of control parameters beyond setpoint

Optimized forced air cooling for excellent temperature stability and uniformity with rapid recovery after door openings and product loading



Multiple Alarms For Safer Monitoring

Audible/visual alarms for high/low temperature excursions

Open door alarm sounds if the door is left ajar

(default 4 minutes with selectable 1-99 minute range)

Audible power failure and sensor failure alarms

Mute function for alarms

Remote alarm contacts in rear of the unit



Fully Featured Interior For Convenient Storage

Energy efficient LED lighting with internal on/off switch

Adjustable plastic-coated wire shelves for improved circulation

Multiple shelf positions spaced at 1/2" to allow flexible adjusting to support smaller items

Adjustable cycle defrost operation

1/2" **probe port** included to accept user-provided monitoring equipment



Quality Design For Reliable Performance

Hospital grade cord with a green dot plug

Antimicrobial silver ion-coated handle for added protection from germs

Self-closing door offers added storage protection

User-reversible door swing (self-closing function compatible with RHD position only)


Environmentally-friendly natural hydrocarbon refrigerant for reduced global warming potential

Meets EPA and SNAP requirements

Convenient security with a top-mounted door lock (2 keys included)

Magnetic gaskets to ensure a positive seal

Compatible with Pyxis®, Omnicell® and AcuDose RX®

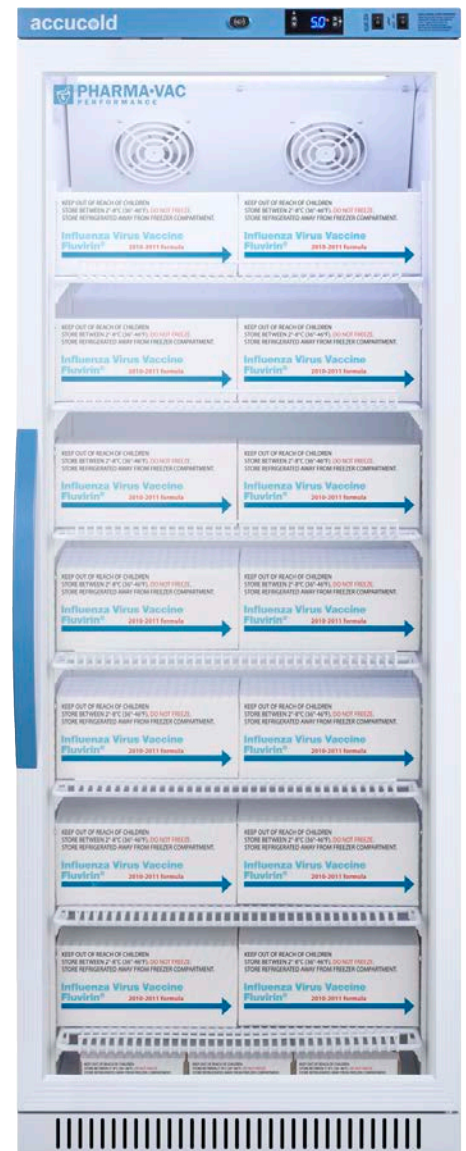

SKU: ARG12PV



Remote contacts



Temperature sensor in glycol bottle



Microprocessor digital temperature control



PHARMA-VAC

PERFORMANCE

**New
Options
Available**

- Keyless Locks
- Interior Lockers
- Ventilated Drawers

See Page 5



ARS1PV

ARG3PV

ARG8PVDR

ARS12PV

ARG15PVLOCKER

Technical Specifications (All Units):

Defrost type: Cycle

Thermostat: Intelligent microprocessor digital

Temperature sensors: 2 (air probe & buffered probe)

Adjustable operationg control range: 2 to 8°C
(35.6 to 46.4°F)

Temperature variation: +/- 1°C*

Shelving: Adjustable white plastic coated wire

Voltage: 115V/60 Hz

Cord: NEMA 5-15P

Lock: Factory-installed key lock

Refrigerant: Eco-friendly R600a or R290a

Light: LED

Access port: ½"

Door: Reversible

Fan: Internal

Certifications: ETL, ETL-C

Parts & Labor Warranty: 2 years

Compressor warranty: 5 years

Included with units:

2 keys

Do Not Unplug removable sticker

Do Not Adjust Temperature removable sticker

Do Not Store Personal Items removable sticker

User manual

DESIGNED TO PROVIDE +/-1 °C VARIATION

The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period.



Extended Warranty

2-year parts & labor
5-year compressor



Eco-Friendly

Uses environmentally
friendly hydrocarbons
for a greener footprint



Compatible

with Pyxis®, Omnicell®,
& AcuDose RX®



Logging Option

DDLs available for cloud
or USB-based outputs

	SOLID DOOR SKU	GLASS DOOR SKU	CAPACITY	H x W x D	INSTALLATION	CABINET	SHELVES	AMPERAGE	SHIPPING WT.
🔒	ARS1PV	ARG1PV	1 cu.ft.	21.5" x 17.5" x 19.75"	Freestanding	White	3	0.6	73 lbs
🔒	ARS2PV	ARG2PV	1.94 cu.ft.	22.25" x 18.5" x 23.25"	Freestanding	White	2	0.6	86 lbs
🔒	ARS32PVBIADA	ARG31PVBIADA	2.83 cu.ft.	32" x 18.5" x 22.63"	Recessed	White	4	0.6	113 lbs
🔒	ARS3PV	ARG3PV	3 cu.ft.	34" x 18.5" x 19"	Freestanding	White	4	0.6	120 lbs
🔒	ARS6PV	ARG6PV	6 cu.ft.	32.5" x 23.38" x 24.38"	Freestanding	White	4	0.75	125 lbs
🔒	ARS62PVBIADA	ARG61PVBIADA	6 cu.ft.	31.75" x 23.38" x 25"	Recessed	White	4	0.75	125 lbs
🔒	ARS8PV	ARG8PV	8 cu.ft.	50" x 23.38" x 24.38"	Freestanding	White	7	1.4	175 lbs
🔒	ARS12PV	ARG12PV	12 cu.ft.	61.75" x 23.38" x 24.38"	Freestanding	White	7	1.4	190 lbs
🔒	ARS15PV	ARG15PV	15 cu.ft.	72" x 23.38" x 24.38"	Freestanding	White	7	1.4	215 lbs
🔒	ARS15PVLOCKER	ARG15PVLOCKER	15 cu.ft.	72" x 23.38" x 24.38"	Freestanding	White	8 lockers	1.4	250 lbs
🔒	ARS18PV	ARG18PV	18 cu.ft.	78.5" x 27.5" x 28"	Freestanding	White	7	1.5	295 lbs

■ All units can be combined with Accucold freezers using our stacking racks

*Specifications are subject to change without notice. For the most current information, visit accucold.com

Performance Series

Refrigeration Certified to NSF/ANSI 456 Vaccine Storage Standard



Purpose-built Pharma-Vac series tested and **approved by an ANSI accredited laboratory** to conform to the latest industry standard



Countertop



ADA



Undercounter



Full Sized

NOTE: This unit has the same feature packages as the Pharma-Vac series (page 6-7) but include a 2-year certificate of calibration. Products in this series have been tested and certified to NSF/ANSI 456.

Temperature excursions can affect the viability of vaccines, so choosing the right refrigerators and freezers that have been designed and purpose built for the application is extremely important. They must also be tested and approved for vaccine storage to help ensure vaccine viability and provide a high level of safety.

A new standard was developed by the NSF Joint Committee (comprised of CDC Members and manufacturing/pharmaceutical experts) on Vaccine Storage. This new NSF/ANSI 456 Vaccine Storage Standard was created to help define temperature performance attributes for vaccine storage units and to challenge refrigerators and freezers manufacturers with testing and performance protocols designed around real-world use applications common in demanding healthcare environments.

Testing includes confirming temperature performance during a series of short, frequent door openings to simulate regular use, as well as long, extended door openings to simulate

events such as inventory counts or cleaning that may require the door to remain open for up to several minutes.

The standard acknowledges that how vaccines are loaded into refrigerators and freezers may affect performance, so units must pass performance criteria loaded and unloaded. In addition, all potential storage locations are considered to ensure there are no hot or cold spots that may allow vaccines to go out of CDC recommended temperature ranges. Temperature measurements are taken in 15 locations during the testing to confirm consistent performance.

With the new standard published, vaccine refrigerator and freezer manufacturers may now submit their equipment to third-party ANSI-accredited labs that can test and certify equipment to the NSF/ANSI 456 Vaccine Storage Standard. Accucold is proud to lead the industry with the largest line of cold storage product sizes certified to NSF/ANSI 456 Vaccine Storage* standard. The Performance-456 Series

supports meeting regulations and guidelines from the CDC, State Agencies, World Health Organization, and other health ministries on vaccine storage and handling.

The Purpose-Built Performance Series delivers the performance and quality you need, in addition to the tight temperature control, low sound and exceptional features to meet the most demanding cold storage applications.



***Note for NSF/ANSI 456 compliance, units must be ordered with a certificate of calibration as designated by "456" in the model number.**





New
Options
Available

- Keyless Locks
- Interior Lockers
- Ventilated Drawers

See Page 5



ARG1PV456



ARS3PV456



ARG8PV456



ARS18PV456

Technical Specifications (All Units):

Defrost type: Cycle

Thermostat: Intelligent microprocessor digital

Temperature sensors: 2 (air probe & buffered probe)

Adjustable operationg control range: 2 to 8°C
(35.6 to 46.4°F)

Temperature variation: +/-1.0°C*

Shelving: Adjustable white plastic coated wire

Voltage: 115V/60 Hz

Cord: NEMA 5-15P

Lock: Factory-installed key lock

Refrigerant: Eco-friendly R600a or R290a

Light: LED

Access port: ½"

Door: Reversible

Fan: Internal

Certifications: ETL, ETL-C, NSF/ANSI 456

Parts & Labor Warranty: 2 years

Compressor warranty: 5 years

Included with units:

2 keys

Do Not Unplug removable sticker

Do Not Adjust Temperature removable sticker

Do Not Store Personal Items removable sticker

User manual

2-year certificate of calibration

NSF/ANSI 456 Certified Temperature measurements taken in 15 locations during testing to confirm consistent performance. Testing includes a series of door openings during both loaded and unloaded operation.



Extended Warranty

2-year parts & labor
5-year compressor



Eco-Friendly

Uses environmentally friendly hydrocarbons for a greener footprint



Compatible

with Pyxis®, Omnicell®, & AcuDose RX®



Logging Option

DDLs available for cloud or USB-based outputs

	SOLID DOOR SKU	GLASS DOOR SKU	CAPACITY	H x W x D	INSTALLATION	CABINET	SHELVES	AMPERAGE	SHIPPING WT.
🔒	ARS1PV456	ARG1PV456	1 cu.ft.	21.5" x 17.5" x 19.75"	Freestanding	White	3	0.6	70 lbs
🔒	ARS2PV456	ARG2PV456	1.94 cu.ft.	22.25" x 18.5" x 23.25"	Freestanding	White	2	0.6	86 lbs
🔒	ARS32PVBIADA456	ARG31PVBIADA456	2.83 cu.ft.	32" x 18.5" x 22.63"	Recessed	White	4	0.6	113 lbs
🔒	ARS3PV456	ARG3PV456	3 cu.ft.	34" x 18.5" x 19"	Freestanding	White	4	0.6	100 lbs
🔒	ARS6PV456	ARG6PV456	6 cu.ft.	32.5" x 23.38" x 24.38"	Freestanding	White	4	0.75	120 lbs
🔒	ARS62PVBIADA456	ARG61PVBIADA456	6 cu.ft.	31.75" x 23.38" x 25"	Recessed	White	4	0.75	125 lbs
🔒	ARS8PV456	ARG8PV456	8 cu.ft.	50" x 23.38" x 24.38"	Freestanding	White	7	1.4	170 lbs
🔒	ARS12PV456	ARG12PV456	12 cu.ft.	61.75" x 23.38" x 24.38"	Freestanding	White	7	1.4	185 lbs
🔒	ARS15PV456	ARG15PV456	15 cu.ft.	72" x 23.38" x 24.38"	Freestanding	White	7	1.4	215 lbs
🔒	ARS18PV456	ARG18PV456	18 cu.ft.	78.5" x 27.5" x 28"	Freestanding	White	7	1.5	295 lbs

■ All units can be combined with Accucold freezers using our stacking racks

*The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period.

Pharma-Vac Performance Series Freezers

Designed and purpose-built for pharmacy, medication, and vaccination applications to support meeting CDC/VFC vaccine storage guidelines



Countertop



ADA



Undercounter



Full Sized



Advanced Temperature Control

Intelligent microprocessor digital temperature controller

Improved temperature accuracy with a buffered probe in glycol-filled bottle to simulate temperature of stored product

Additional sensor reads interior air temperature for superior temperature control

Adjustable operating control range from -30°C to -10°C (-22°F to +14°F)

Digital display of the min/max temperature (updated in 15 minute increments)

Temperature viewable in Celsius and Fahrenheit to the nearest tenth of a degree

Password protection of control parameters beyond setpoint



Multiple Alarms For Safer Monitoring

Audible/visual alarms for high/low temperature excursions

Open door alarm sounds if the door is left ajar (default 4 minutes with selectable 1-99 minute range)

Audible power failure and sensor failure alarms

Mute function for alarms

Remote alarm contacts in rear of the unit



Fully Featured Interior For Convenient Storage

Energy efficient LED lighting with internal on/off switch

Adjustable plastic-coated wire shelves for improved circulation

Multiple shelf positions spaced at ½" to allow flexible adjusting to support smaller items

Static manual defrost cooling

½" **probe port** included to accept user-provided monitoring equipment



Quality Design For Reliable Performance

Hospital grade cord with a green dot plug

Powder-coated handle with naturally occurring silver ions to reduce the spread of germs

Self-closing door offers added storage protection

User-reversible door swing (self-closing function compatible with RHD position only)

Environmentally-friendly natural hydrocarbon refrigerant for reduced global warming potential

Meets EPA and SNAP requirements

Convenient security with a top-mounted door lock (2 keys included)

Magnetic gaskets to ensure a positive seal

Pyxis®, Omnicell® and AcuDose RX® compatible



Remote contacts



Temperature sensor in glycol bottle



Microprocessor digital temperature control



New
Options
Available

• Keyless Locks

See Page 5



AFZ2PVBIADA



AFZ5PVBIADA



Technical Specifications (All Units):

Defrost: Manual or Frost-Free

Thermostat: Intelligent microprocessor digital

Temperature Sensors: 2 (air probe and buffered probe)

Adjustable Operating Control Range: -30°C to -10°C (-22°F to +14°F)

Shelving: White plastic coated wire

Voltage: 115V/60Hz

Cord: NEMA 5-15P

Lock: Factory-installed key lock

Handle: Silver-coated antimicrobial coating

Refrigerant: Eco-friendly R290a

Light: LED

Access Port: ½"

Door: Reversible

Fan: Internal

Certifications: ETL, ETL-C

Parts & Labor Warranty: 2 years

Compressor Warranty: 5 years

Included with units:

DO NOT UNPLUG warning sticker

DO NOT ADJUST TEMPERATURE warning sticker

DO NOT STORE PERSONAL ITEMS warning sticker

DESIGNED TO PROVIDE +/-1 °C VARIATION

The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period.



Extended Warranty

2-year parts & labor
5-year compressor



Eco-Friendly

Uses environmentally friendly hydrocarbons for a greener footprint



Compatible

with Pyxis®, Omnicell®, & AcuDose RX®



Logging Option

DDLs available for cloud or USB-based outputs

SKU	CAPACITY	H x W x D	INSTALLATION	DEFROST	DOOR	CABINET	SHELVES	AMPERAGE	SHIPPING WT.
AFZ1PV	1.5 cu.ft.	22.25" x 18.5" x 23.25"	Freestanding	Manual	White	White	2	1.3	86 lbs
AFZ2PVBIADA	2.47 cu.ft.	32" x 19.75" x 22.63"	Recessed	Manual	White	White	4	1.3	110 lbs
AFZ5PVBIADA	3.88 cu.ft.	31.75" x 23.38" x 25"	Recessed	Manual	White	White	4	1.3	165 lbs
AFS14PV	9.53 cu.ft.	75" x 23.50" x 25.25"	Freestanding	Frost-Free	White	White	6	4.3	240 lbs
AFS17PV	14.83 cu.ft.	79.50" x 27.50" x 26.63"	Freestanding	Frost-Free	White	White	6	4.3	270 lbs

■ All units can be combined with Accucold freezers using our stacking racks

*Specifications are subject to change without notice. For the most current information, visit accucold.com

Pharma-Lab Performance Series

Refrigerators and freezers designed and **purpose-built to meet the demanding needs for pharmacy, medication, vaccine, laboratory, and life science applications**



Advanced Temperature Control

Intelligent microprocessor digital temperature controller

Precise temperature control supports meeting the CDC/VFC storage guidelines

Improved temperature accuracy with a separate temperature probe for continuous product readout

Additional sensor reads interior air temperature for superior temperature control

Adjustable operating control range; Refrigerators: +2°C to +10°C (+35.6° F to +50° F)/

Freezers: -30°C to -15°C (-22°F to +5°F)

Digital display of the min/max temperature (updated in 15 minute increments)

Temperature viewable in Celsius or Fahrenheit to the nearest degree

Optimized forced air cooling for excellent temperature stability and uniformity with rapid recovery after door openings and product loading



Multiple Alarms For Safer Monitoring

Audible/visual alarms for high/low temperature excursions

Open door alarm will sound at different levels when the door is left ajar for times starting at 30 seconds

Condenser cleaning alarm sends audible and visual signal every six months



Fully Featured Interior For Convenient Storage

Adjustable plastic-coated wire shelves for improved circulation

Multiple shelf positions spaced at 1/2" to allow flexible adjusting to support smaller items

Interior LED lighting for an energy efficient presentation

Adjustable cycle defrost operation



Quality Design For Reliable Performance

Complete stainless steel construction inside and out for easier cleanup

Glass door models feature anti-condensate door frame heater to ensure a clear view

Self-closing door helps to protect contents, but will also remain open when the door is opened at a 90° angle for easier loading

Ships with 6" high commercial locking casters for optional installation

Factory-installed locks located towards the top of the unit for convenient security

Sealed back for a space-saving design that's easier to clean

Environmentally-friendly natural hydrocarbon refrigerant for reduced global warming potential

Meets EPA and SNAP requirements

Quality door gaskets ensure a tight seal for energy savings and improved performance

SKU: ARG23ML



6" high locking castors



Adjustable shelving



Microprocessor digital temperature control



ARS23ML

ARG49ML

AFS49ML

Technical Specifications (All Units):

Defrost type: Cycle

Thermostat: Intelligent microprocessor digital

Temperature sensor: 2 (air probe & product probe)

Adjustable operating control range: 2 to 10°C

(refrigerators)/-30 to -15°C (freezers)

Shelving: White plastic coated wire

Voltage: 115V/60Hz

Cord: NEMA 5-15P

Lock: Factory-installed key lock

Refrigerant: Eco-friendly R600a (refrigerators)

Eco-friendly R290a (Freezers)

Light: LED

Door: RHD/LHD or French (double door)

Fan: Internal

Certifications: UL, UL-C

Parts & Labor Warranty: 2 years

Compressor Warranty: 5 years

Included with units:

2 keys

User manual

Designed to operate within $\pm 1.5^{\circ}\text{C}$ (Refrigerators) or $\pm 2.5^{\circ}\text{C}$ (Freezers) of setpoint. Freezers with auto defrost may see temperature excursions beyond this during defrost. The published temperature variation is derived from the maximum deviation of a NTC sensor in 1 oz. vial located nearest the chamber geometric center during a 24hr test period.



Extended Warranty

2-year parts & labor
5-year compressor



Eco-Friendly

Uses environmentally friendly hydrocarbons for a greener footprint



Logging Option

DDLs available for cloud or USB-based outputs

Refrigerators

SKU	CAPACITY	H x W x D	DOOR(S)	CABINET	DOOR SWING	SHELVES	AMPERAGE	SHIPPING WT.
ARS23ML	23 cu.ft.	83.75" x 27.5" x 31"	(1) Stainless Steel	Stainless Steel	RHD	4	7.5	292 lbs
ARS23MLLH	23 cu.ft.	83.75" x 27.5" x 31"	(1) Stainless Steel	Stainless Steel	LHD	4	7.5	292 lbs
ARG23ML	23 cu.ft.	83.75" x 27.5" x 31"	(1) Glass	Stainless Steel	RHD	4	7.5	292 lbs
ARG23MLLH	23 cu.ft.	83.75" x 27.5" x 31"	(1) Glass	Stainless Steel	LHD	4	7.5	292 lbs
ARS49ML	49 cu.ft.	83.75" x 55.25" x 31"	(2) Stainless Steel	Stainless Steel	French	8	7.5	430 lbs
ARG49ML	49 cu.ft.	83.75" x 55.25" x 31"	(2) Glass	Stainless Steel	French	8	7.5	450 lbs

Freezers

SKU	CAPACITY	H x W x D	DOOR(S)	CABINET	DOOR SWING	SHELVES	AMPERAGE	SHIPPING WT.
AFS23ML	23 cu.ft.	83.75" x 27.5" x 31"	(1) Stainless Steel	Stainless Steel	RHD	4	8	292 lbs
AFS23MLLH	23 cu.ft.	83.75" x 27.5" x 31"	(1) Stainless Steel	Stainless Steel	LHD	4	8	292 lbs
AFS49ML	49 cu.ft.	83.75" x 55.25" x 31"	(2) Stainless Steel	Stainless Steel	French	8	10.5	450 lbs

*Specifications are subject to change without notice. For the most current information, visit accucold.com

Med-Lab Performance Series

Medical grade, temperature-controlled solutions to meet the demanding needs of scientific, life science, laboratory, and medical cold storage applications



Advanced Temperature Control

Intelligent microprocessor digital temperature controller
Improved temperature accuracy with a buffered probe in glycol-filled bottle to simulate temperature of stored product
Additional sensor reads interior air temperature for superior temperature control
Adjustable operating control range from +2°C to +10°C (+35.6°F to +50°F)
Digital display of the min/max temperature (updated in 15 minute increments)
Temperature viewable in Celsius and Fahrenheit to the nearest tenth of a degree
Password protection of control parameters beyond setpoint
Optimized forced air cooling for excellent temperature stability and uniformity with rapid recovery after door openings and product loading



Multiple Alarms For Safer Monitoring

Audible/visual alarms for high/low temperature excursions
Open door alarm sounds if the door is left ajar (default 4 minutes with selectable 1-99 minute range)
Audible power failure and sensor failure alarms
Mute function for alarms
Remote alarm contacts in rear of the unit



Fully Featured Interior For Convenient Storage

Energy efficient LED lighting with internal on/off switch
Adjustable plastic-coated wire shelves for improved circulation
Multiple shelf positions spaced at 1/2" to allow flexible adjusting to support smaller items
Adjustable cycle defrost operation
1/2" probe port included to accept user-provided monitoring equipment



Quality Design For Reliable Performance

Hospital grade cord with a green dot plug
Antimicrobial silver ion-coated handle for added protection from germs
Self-closing door offers added storage protection
User-reversible door swing (self-closing function compatible with RHD position only)
Environmentally-friendly natural hydrocarbon refrigerant for reduced global warming potential
Meets EPA and SNAP requirements
Convenient security with a top-mounted door lock (2 keys included)
Magnetic gaskets to ensure a positive seal
Compatible with Pyxis®, Omnicell® and AcuDose RX®



SKU: ARG3ML



Remote Contacts



Temperature sensor in glycol bottle



Microprocessor digital temperature control



New
Options
Available

- Keyless Locks
- Interior Lockers
- Ventilated Drawers

See Page 5

Technical Specifications (All Units):



ARG6ML



ARS6MLDR



ARS8ML



ARS15MLLOCKER

Defrost type: Cycle

Thermostat: Intelligent microprocessor digital

Temperature sensors: 2 (air probe & buffered probe)

Adjustable operating control range: +2°C to +10°C
(+35.6°F to +50°F)

Temperature variation: +/- 1°C*

Shelving: Adjustable white plastic coated wire

Voltage: 115V/60 Hz

Cord: NEMA 5-15P

Lock: Factory-installed key lock

Refrigerant: Eco-friendly R600a

Light: LED

Access port: ½"

Door: Reversible

Fan: Internal

Certifications: ETL, ETL-C

Parts & Labor Warranty: 2 years

Compressor warranty: 5 years

Included with units:

2 keys

Do Not Unplug removable sticker

Do Not Adjust Temperature removable sticker

Do Not Store Personal Items removable sticker

User manual

DESIGNED TO PROVIDE +/-1°C VARIATION

The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period.



Extended Warranty

2-year parts & labor
5-year compressor



Eco-Friendly

Uses environmentally
friendly hydrocarbons for
a greener footprint



Compatible

with Pyxis®, Omnicell®,
& AcuDose RX®



Logging Option

DDLs available for cloud
or USB-based outputs


	SKU	CAPACITY	H x W x D	DOOR	CABINET	SHELVES	AMPERAGE	SHIPPING WT.
🔒	ARS1ML	1 cu.ft.	21.5" x 17.5" x 19.75"	White	White	3	0.6	70 lbs
🔒	ARG1ML	1 cu.ft.	21.5" x 17.5" x 19.75"	Glass	White	3	0.6	73 lbs
🔒	ARS3ML	3 cu.ft.	34" x 18.5" x 19"	White	White	4	0.6	90 lbs
🔒	ARG3ML	3 cu.ft.	34" x 18.5" x 19"	Glass	White	4	0.6	95 lbs
🔒	ARS6ML	6 cu.ft.	32.5" x 23.38" x 24.38"	White	White	4	0.75	120 lbs
🔒	ARG6ML	6 cu.ft.	32.5" x 23.38" x 24.38"	Glass	White	4	0.75	125 lbs
🔒	ARS8ML	8 cu.ft.	50" x 23.38" x 24.38"	White	White	7	1.4	170 lbs
🔒	ARG8ML	8 cu.ft.	50" x 23.38" x 24.38"	Glass	White	7	1.4	175 lbs
🔒	ARS12ML	12 cu.ft.	61.75" x 23.38" x 24.38"	White	White	7	1.4	185 lbs
🔒	ARG12ML	12 cu.ft.	61.75" x 23.38" x 24.38"	Glass	White	7	1.4	190 lbs
🔒	ARS15ML	15 cu.ft.	72" x 23.38" x 24.38"	White	White	7	1.4	215 lbs
🔒	ARG15ML	15 cu.ft.	72" x 23.38" x 24.38"	Glass	White	7	1.4	215 lbs
🔒	ARS15MLLOCKER	15 cu.ft.	72" x 23.38" x 24.38"	White	White	8 lockers	1.4	250 lbs
🔒	ARG15MLLOCKER	15 cu.ft.	72" x 23.38" x 24.38"	Glass	White	8 lockers	1.4	250 lbs

■ All units can be combined with Accucold freezers using our stacking racks

*Specifications are subject to change without notice. For the most current information, visit accucold.com

Manual Defrost All-Freezers & All-Refrigerators

Popular sizes from countertop to large capacity for static cooling operation in pharmacy, life science, and industrial storage applications.

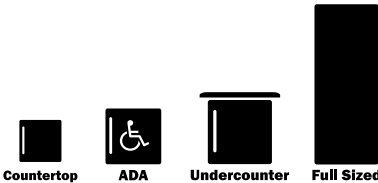

Features

- Static manual defrost operation** with no internal fans
- Factory-installed locks** for added security
- Adjustable shelves** or slide-out baskets
- Audible high/low temperature alarms**
- External readout** of the current and min/max temperatures
- Access port included** for additional monitoring equipment
- Thick insulation** and magnetic gaskets to ensure a quality seal



	SKU	CAPACITY	H x W x D	DOOR	CABINET	SHELVES	INSTALLATION	AMPERAGE	SHIPPING WT.	CERTIFICATIONS*
🔒	VT65MLVAC456	3.5 cu.ft.	33.5" x 23.63" x 23.63"	White	White	3 baskets	Built-In/Freestanding	1.3	110 lbs	NSF/ANSI 456
🔒	VT65MLVAC456ADA	3.5 cu.ft.	32" x 23.63" x 23.50"	White	White	3 baskets	Built-In/Freestanding	1.3	110 lbs	NSF/ANSI 456
🔒	UFM19W	18.3 cu.ft.	72" x 30.5" x 27.63"	White	White	4 wire	Freestanding	2.7	245 lbs.	ETL, ETL-C, ETL-S
🔒	URM19W	18.3 cu.ft.	72" x 30.5" x 27.63"	White	White	4 wire	Freestanding	2.7	245 lbs.	ETL, ETL-C, ETL-S

*Specifications are subject to change without notice. For the most current information, visit accucold.com

Refrigerator-Freezer Combinations

Pharma-Vac refrigerators stacked with Performance freezers create all-purpose combinations that provide reliable storage in slimmer fitting footprints



Features

New full-size one-piece dual compressor choice

Easy assembly with our stacking rack

Takes up less than 24" of floor space for an easier fit in facilities

Fully featured with our Performance Series packages

Access ports included with both units

External temperature readout as recommended by the CDC

Independent refrigerator and freezer operation for optimum performance

High/low temperature alarms installed in both units

Locking doors with separate keys

Extended warranty with 2 years parts & labor/5 years compressor



StackRack lets you combine virtually any two units



SKU: ARG6PV-AFZ5PVBIASTACK



SKU: ARS6PV-AFZ5PVBIASTACK

	SKU	CAPACITY	H x W x D	DOOR	CABINET	SHELVES	AMPERAGE	CERTIFICATIONS
🔒	ARS32PVBIAADA-AFZ2PVBIASTACK	2.83/2.47 cu.ft.	64" x 19.75" x 22.63"	White	White	4/4	.75/1.3	ETL, ETL-C
🔒	ARG31PVBIAADA-AFZ2PVBIASTACK	2.83/2.47 cu.ft.	64" x 19.75" x 22.63"	Glass/White	White	4/4	.75/1.3	ETL, ETL-C
🔒	ARS6PV-AFZ5PVBIASTACK	6/3.88 cu.ft.	64" x 23.38" x 25"	White	White	4/4	.75/1.3	ETL, ETL-C
🔒	ARG6PV-AFZ5PVBIASTACK	6/3.88 cu.ft.	64" x 23.38" x 25"	Glass/White	White	4/4	.75/1.3	ETL, ETL-C
🔒	ARG31PVBIAADA-AFZ1PVBSTACK	2.83/1.4 cu.ft.	64" x 23.38" x 25"	Glass	White	4/1	.75/1.3	ETL, ETL-C
🔒	ARS32PVBIAADA-AFZ1PVBSTACK	2.83/1.4 cu.ft.	64" x 23.38" x 25"	White	White	4/1	.75/1.3	ETL, ETL-C
🔒	ARG6PV-AFZ1PVBSTACK	6/1.4 cu.ft.	64" x 23.38" x 25"	Glass	White	4/1	.75/1.3	ETL, ETL-C
🔒	ARS6PV-AFZ1PVBSTACK	6/1.4 cu.ft.	64" x 23.38" x 25"	White	White	4/1	.75/1.3	ETL, ETL-C
🔒	ARS8PV-AFZ1PVBIASTACK	8/1.4 cu.ft.	72" x 23.38" x 24.38"	White	White	7/1	.75/1.3	ETL, ETL-C
🔒	ARG8PV-AFZ1PVBIASTACK	8/1.4 cu.ft.	72" x 23.38" x 24.38"	Glass/White	White	7/1	.75/1.3	ETL, ETL-C
🔒	ARG12PV-AFZ1PVBSTACK	12/1.4 cu.ft.	72" x 23.38" x 24.38"	Glass	White	7/1	.75/1.3	ETL, ETL-C
🔒	ARS12PV-AFZ1PVBSTACK	12/1.4 cu.ft.	72" x 23.38" x 24.38"	White	White	7/1	.75/1.3	ETL, ETL-C
🔒	ARFS18PV	11.5/4 cu.ft.	79" x 23.5" x 24.5"	White	White	4/2	2	ETL, ETL-C
🔒	ARFG18PV	11.5/4 cu.ft.	79" x 23.5" x 24.5"	Glass/White	White	4/2	2	ETL, ETL-C
🔒	ARFS15PV	7.4/3.4 cu.ft.	74.75" x 23.5" x 24.5"	White	White	3/2	2.6	ETL, ETL-C
🔒	ARFG15PV	7.4/3.4 cu.ft.	74.75" x 23.5" x 24.5"	Glass/White	White	3/2	2.6	ETL, ETL-C


* All units can be manufactured with a left hand door swing. Add option "LHD" upon order

■ Additional combinations available by special order

*Specifications are subject to change without notice. For the most current information, visit accucold.com

Ultra Low Temperature Chest Freezers

Made in Denmark, our -85°C chest freezers offer reliable ultra low temperature storage for biological samples, **DNA/RNA material, chemicals, select vaccines**, and other substances with **strict temperature requirements**

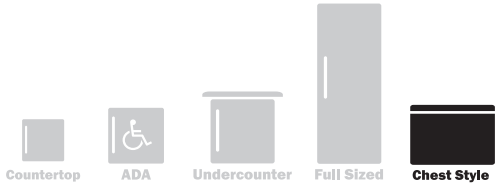

Low Temperature Storage

- Digital control panel allows you to manage the temperature between -50 and -85°C
- Temperature viewable in Celsius or Fahrenheit to the nearest tenth of a degree
- Fast pull-down time of 3 hours from ambient temperature
- Power-out alarm powered by a 9V battery audible warns of power failure



User-Friendly Features

- Pre-installed casters allow easy mobility
- Counterbalanced hinges to ensure safer loading
- High/low temperature alarm audible warns if the interior goes out of range
- Defrost drain in front for easy maintenance as needed
- Vertical box shelf option for added storage convenience



Quality Design For Reliable Performance

- Factory-installed lock for convenient security
- Inner lids included for added protection when loading the freezer
- Hermetically sealed compressor ensures lasting durability in busy facilities
- Extra thick insulation with 4 ½" thick walls
- Advanced design features 8 layers of D-shaped cooling pipes to improve efficiency




SKU: LAB11R9 includes 6 10-box shelves and 3 5-box shelves

	SKU	CAPACITY	H X W X D	FINISH	STORAGE	SET POINT RANGE	CASTORS	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
🔒	LAB11	4.8 cu.ft.	36.25" x 28.5" x 28"	White	-	-85 to -50°C	Pre-Installed	5.3	140 lbs	UL,UL-C, UL-S
🔒	LAB11R9	4.8 cu.ft.	36.25" x 28.5" x 28"	White	(6) 10-box shelves (3) 5-box shelves	-85 to -50°C	Pre-Installed	5.3	160 lbs	UL,UL-C, UL-S
🔒	LAB8	3.08 cu.ft.	36.25" x 23.75" x 28"	White	-	-85 to -50°C	Included	6	200 lbs	UL, UL-C, UL-S
🔒	LAB8R6	3.08 cu.ft.	36.25" x 23.75" x 28"	White	(3) 10-box shelves (3) 5-box shelves	-85 to -50°C	Included	6	210 lbs	UL, UL-C, UL-S

Low Temperature Freezers

From laboratory research to veterinary storage, Accucold's **-45°C** freezers serve a variety of storage functions in a range of sizes to fit any facility's space

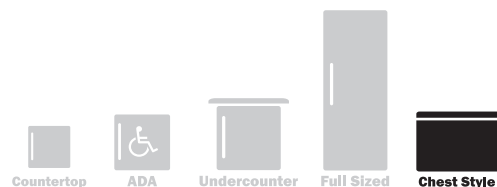

Low Temperature Storage

Digital control panel for easy temperature management
Advanced design for maximum efficiency
Pre-installed access port to accept monitoring equipment



Variety of Sizes & Styles

28" to 67" wide options



User-Friendly Features

Pre-installed casters allow easy mobility (select units)
Counterbalanced hinges to ensure safer loading
High/low temperature alarm audible warns if the interior goes out of range
Defrost drain in front for easy maintenance as needed



Quality Design For Reliable Performance

Factory-installed lock for convenient security
Thick insulation to ensure proper cold storage
Made in Denmark



SKU: EL41LT



SKU: EL11LT

	SKU	CAPACITY	H x W x D	FINISH	STORAGE	SET POINT RANGE	CASTERS	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
🔒	EL11LT	4.8 cu.ft.	33.5" x 28.5" x 27.25"	White	-	-45 to -0°C	Included	7.2	127 lbs	UL, UL-C, UL-S
🔒	EL21LT	8.4 cu.ft.	33.5" x 41.5" x 27.25"	White	-	-45 to -0°C	Included	7.2	135 lbs	UL, UL-C, UL-S
🔒	EL31LT	11 cu.ft.	33.5" x 51.38" x 27.25"	White	-	-45 to -0°C	Included	7.2	157 lbs	UL, UL-C, UL-S
🔒	EL41LT	12.8 cu.ft.	33.5" x 59.25" x 27.25"	White	-	-45 to -0°C	Included	7.2	170 lbs	UL, UL-C, UL-S
🔒	EL51LT	15.5 cu.ft.	33.5" x 67" x 27.25"	White	-	-45 to -0°C	Included	7.2	220 lbs	UL, UL-C, UL-S

Controlled Room Temperature

Performance Series Cabinet

Designed and **purpose-built** for ambient medication and vaccine storage in pharmacy and patient care areas



Countertop



ADA



Undercounter



Full Sized



Advanced Temperature Control

Intelligent microprocessor digital temperature controller

Improved temperature accuracy with a buffered probe in glycol-filled bottle to simulate temperature of stored product

Additional sensor reads interior air temperature for superior temperature control

Adjustable operating control range from 68° to 77° F (20° C to 25° C)

Digital display of the min/max temperature (updated in 15 minute increments)

Temperature viewable in Celsius and Fahrenheit to the nearest tenth of a degree

Password protection of control parameters beyond setpoint

Optimized forced air cooling for excellent temperature stability and uniformity with rapid recovery after door openings and product loading



Multiple Alarms For Safer Monitoring

Audible/visual alarms for high/low temperature excursions

Open door alarm sounds if the door is left ajar

(default 4 minutes with selectable 1-99 minute range)

Audible power failure and sensor failure alarms

Mute function for alarms

Remote alarm contacts in rear of the unit



Fully Featured Interior For Convenient Storage

Energy efficient LED lighting with internal on/off switch

Adjustable plastic-coated wire shelves for improved circulation

Multiple shelf positions spaced at 1/2" to allow flexible adjusting to support smaller items

Adjustable cycle defrost operation

1/2" **probe port** included to accept user-provided monitoring equipment



Quality Design For Reliable Performance

Hospital grade cord with a green dot plug

Antimicrobial silver ion-coated handle for added protection from germs

Self-closing door offers added storage protection

User-reversible door swing (self-closing function compatible with RHD position only)

Environmentally-friendly natural hydrocarbon refrigerant for reduced global warming potential

Meets EPA and SNAP requirements

Convenient security with a top-mounted door lock (2 keys included)

Magnetic gaskets to ensure a positive seal

Compatible with Pyxis®, Omnicell® and AcuDose RX®



SKU: ARG12PV-CRT



Performance
CRT **CONTROLLED ROOM TEMPERATURE** 72°F

New
Options
Available

- Keyless Locks
- Interior Lockers
- Ventilated Drawers

See Page 5



ARS1PV-CRT

ARG3PV-CRT

ARG8PVDR-CRT

ARS12PV-CRT

ARG15PV-CRT

Technical Specifications (All Units):

Defrost type: Cycle

Thermostat: Intelligent microprocessor digital

Temperature sensors: 2 (air probe & buffered probe)

Adjustable operating control range: 68° to 77 °F

(20 °C to 25 °C)

Temperature variation: +/- 1.5°C*

Shelving: Adjustable white plastic coated wire

Voltage: 115V/60 Hz

Cord: NEMA 5-15P

Lock: Factory-installed key lock

Refrigerant: Eco-friendly R600a or R290a

Light: LED

Access port: ½"

Door: Reversible

Fan: Internal

Certifications: ETL, ETL-C

Parts & Labor Warranty: 2 years

Compressor warranty: 5 years

Included with units:

2 keys

Do Not Unplug removable sticker

Do Not Adjust Temperature removable sticker

Do Not Store Personal Items removable sticker

User manual

DESIGNED TO PROVIDE +/-1.5°C VARIATION

The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period.



Extended Warranty

2-year parts & labor
5-year compressor



Eco-Friendly

Uses environmentally friendly hydrocarbons for a greener footprint



Compatible

with Pyxis®, Omnicell®, & AcuDose RX®



Logging Option

DDLs available for cloud or USB-based outputs

	SOLID DOOR SKU	GLASS DOOR SKU	CAPACITY	H x W x D	INSTALLATION	CABINET	SHELVES	AMPERAGE	SHIPPING WT.
🔒	ARS1PV-CRT	ARG1PV-CRT	1 cu.ft.	21.5" x 17.5" x 19.75"	Freestanding	White	3	0.6	70 lbs
🔒	ARS2PV-CRT	ARG2PV-CRT	1.94 cu.ft.	22.25" x 18.5" x 23.25"	Freestanding	White	2	0.6	86 lbs
🔒	ARS32PVBIADA-CRT	ARG31PVBIADA-CRT	2.83 cu.ft.	32" x 18.5" x 22.63"	Recessed	White	4	0.6	113 lbs
🔒	ARS3PV-CRT	ARG3PV-CRT	3 cu.ft.	34" x 18.5" x 19"	Freestanding	White	4	0.6	100 lbs
🔒	ARS6PV-CRT	ARG6PV-CRT	6 cu.ft.	32.5" x 23.38" x 24.38"	Freestanding	White	4	0.75	120 lbs
🔒	ARS62PVBIADA-CRT	ARG61PVBIADA-CRT	6 cu.ft.	31.75" x 23.38" x 25"	Recessed	White	4	0.75	125 lbs
🔒	ARS8PV-CRT	ARG8PV-CRT	8 cu.ft.	50" x 23.38" x 24.38"	Freestanding	White	7	1.4	170 lbs
🔒	ARS12PV-CRT	ARG12PV-CRT	12 cu.ft.	61.75" x 23.38" x 24.38"	Freestanding	White	7	1.4	185 lbs
🔒	ARS15PV-CRT	ARG15PV-CRT	15 cu.ft.	72" x 23.38" x 24.38"	Freestanding	White	7	1.4	215 lbs
🔒	ARS18PV-CRT	ARG18PV-CRT	18 cu.ft.	78.5" x 27.5" x 28"	Freestanding	White	7	1.5	295 lbs

■ All units can be combined with Accucold freezers using our stacking racks

*Specifications are subject to change without notice. For the most current information, visit accucold.com

Performance Series BOD Refrigerated/Heated Incubators

Designed and purpose-built to ensure stable temperature conditions for BOD and microbiological cold storage applications at 20°C



Compact



ADA



Undercounter



Full Sized



Advanced Temperature Control

Intelligent microprocessor digital temperature controller
Improved temperature accuracy with a buffered probe in glycol-filled bottle to simulate temperature of stored product
Additional sensor reads interior air temperature for superior temperature control
4°C to 60°C adjustable operating control range
Digital display of the min/max temperature (updated in 15 minute increments)
Temperature viewable in Celsius and Fahrenheit to the nearest tenth of a degree
Password protection of control parameters beyond setpoint
Optimized forced air cooling for temperature stability and uniformity with rapid recovery after door openings



Multiple Alarms For Safer Monitoring

Audible/visual alarms for high/low temperature excursions
Open door alarm sounds if the door is left ajar (default 4 minutes with selectable 1-99 minute range)
Audible power failure and sensor failure alarms
Mute function for alarms
Remote alarm contacts in rear of the unit



Fully Featured Interior For Convenient Storage

Energy efficient LED lighting with internal on/off switch
Adjustable plastic-coated wire shelves for improved circulation
Multiple shelf positions spaced at 1/2" to allow flexible adjusting to support smaller items
Adjustable cycle defrost operation
1/2" probe port included to accept user-provided monitoring equipment



Quality Design For Reliable Performance

Hospital grade cord with a green dot plug
Antimicrobial handle with naturally occurring silver ions to reduce the spread of germs
Self-closing door offers added storage protection
Environmentally-friendly natural hydrocarbon refrigerant for reduced global warming potential
Meets EPA and SNAP requirements
Convenient security with a top-mounted door lock (2 keys included)
Magnetic gaskets to ensure a positive seal



Model: ABOD6



Model: ABOD18

BOD REFRIGERATED INCUBATOR PERFORMANCE CHAMBER

New
Options
Available

- Keyless Locks
- Interior Lockers
- Ventilated Drawers

See Page 5



ABOD6



ABOD15LHD



ABOD18

Technical Specifications (All Units):

Defrost: Cycle

Thermostat: Intelligent microprocessor digital

Temperature Sensors: 2 (air probe and buffered probe)

Adjustable Operating Control Range: 4 to 60°C (39.2 to 140°F)

Temperature Variation: +/-1°C

Shelving: White plastic coated wire

Voltage: 115V/60Hz

Cord: NEMA 5-15P

Lock: Factory-installed key lock

Handle: Silver-coated antimicrobial coating

Refrigerant: Eco-friendly R600a or R290a

Light: LED

Access Port: 1/2"

Door: Reversible

Fan: Internal

Certifications: ETL, ETI-C

Parts & Labor Warranty: 2 years

Compressor Warranty: 5 years

DESIGNED TO PROVIDE +/-1 °C VARIATION

The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period.



Extended Warranty

2-year parts & labor
5-year compressor



Eco-Friendly

Uses environmentally friendly hydrocarbons for a greener footprint



Compatible

with Pyxis®, Omnicell®, & AcuDose RX®



Logging Option

add our D2LB data logger for additional assurance

	SKU	CAPACITY	H x W x D	INSTALLATION	EST. BOTTLE CAPACITY*	DOOR	CABINET	SHELVES	FANS	AMPERAGE
🔒	ABOD6	6 cu.ft. / 70L	32.5" x 23.38" x 24.38"	Freestanding	90	White	White	4	1	0.75
🔒	ABOD15	15 cu.ft. / 425L	72" x 23.38" x 24.38"	Freestanding	210	White	White	7	2	1.4
🔒	ABOD18	18 cu.ft. / 510L	78.5" x 27.5" x 26"	Freestanding	300	White	White	7	2	1.5

■ *Actual count may vary by bottle manufacturer and style

*Specifications are subject to change without notice. For the most current information, visit accucold.com

Icemakers & Ice/Water Dispensers

Available in a range of sizes, to keep patients and staff hydrated.



Features

Tabletop ice/water dispenser ideal for hospital waiting areas

Optional filters for improved ice water purity

Commercially approved choices listed to NSF-12 standards

Drain-free choice (BIM25) for versatile installation

Choices available in a lower 32" height for use under ADA compliant counters

ENERGY STAR certified choices included

High capacity production on select models

Available with an internal pump or gravity drain system



SKU: AIWD160



SKU: AIWD282



SKU: AIWD450

Ice & Water Dispensers

SKU	CAPACITY	ICE TYPE	H x W x D	FILTER	CABINET	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
AIWD160	160 lbs/day	Clear nugget	24.75" x 13.75" x 24"	Optional	Black/SS	2.8	112 lbs	UL, UL-C, ETL-S
AIWD282	282 lbs/day	Clear nugget	28" x 16.5" x 24.88"	Optional	SS/SS Look	5.8	177 lbs	UL, UL-C, ETL-S
AIWD450	378 lbs/day	Clear nugget	43.5" x 16.5" x 26.5"	Optional	SS/SS Look	15	223 lbs	UL, UL-C, ETL-S
AIWD220	220 lbs./day	Clear nugget	33.5" x 13.88" x 23.75"	Optional	Black/SS	4.5	167 lbs.	ETL, ETL-C, ETL-S

*For versions of the above with filters, add suffix "FLTR"

Clear Icemakers (Drain Required)

SKU	CAPACITY	ICE TYPE	H x W x D	DOOR	CABINET	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
BIM44G	50 lbs/day	Clear cube	33" x 14.5" x 23.5"	Stainless Steel	Black	4.8	105 lbs	UL, UL-C, NSF
BIM44GADA	50 lbs/day	Clear cube	32.38" x 14.5" x 23.5"	Stainless Steel	Black	4.8	105 lbs	UL, UL-C, NSF
BIM100	100 lbs/day	Clear cube	34.5" x 20.5" x 22.25"	Black	Stainless Steel	3.8	120 lbs	ETL, ETL-C, ETL-S
BIM100ADA	100 lbs/day	Clear cube	31.5" x 20.5" x 22.25"	Black	Stainless Steel	3.8	120 lbs	ETL, ETL-C, ETL-S
BIM55BU	55 lbs./day	Clear bullet	30" x 14.75 x 21.75	Black	Stainless Steel	3.5	113 lbs.	ETL, ETL-C, ETL-S
BIM77BU	77 lbs./day	Clear bullet	30" x 14.75 x 21.75	Black	Stainless Steel	3.5	113 lbs.	ETL, ETL-C, ETL-S
BIM85	80 lbs./day	Clear cube	36" x 19.75" x 17.25"	Black	Stainless Steel	3.5	123 lbs.	ETL, ETL-C, ETL-S
BIM125	120 lbs./day	Clear cube	36" x 19.75 x 23.75"	Black	Stainless Steel	3.5	130 lbs.	ETL, ETL-C, ETL-S
BIM210	210 lbs./day	Clear cube	38.75" x 26" x 20"	Black	Stainless Steel	3.5	167 lbs.	ETL, ETL-C, ETL-S
BIM352KBIN	350 lbs./day	Clear cube	76.25" x 23.25" x 32.75"	Stainless Steel	Stainless Steel	3.5	195 lbs.	ETL, ETL-C, ETL-S
BIM350KDISP	350 lbs./day	Clear cube	76.25" x 23.25" x 32.75"	Stainless Steel	Stainless Steel	3.5	195 lbs.	ETL, ETL-C, ETL-S


Crescent Icemakers (No Drain Required)

SKU	CAPACITY	ICE TYPE	H x W x D	DOOR	CABINET	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
BIM26	15 lbs/day	Cloudy crescent	25" x 14.88" x 16.75"	Stainless Steel	Black	1.2	50 lbs	ETL, ETL-C

*Specifications are subject to change without notice. For the most current information, visit accucold.com

JCAHO Compliant Nutrition Centers

Commercially approved refrigerators and freezers specifically designed for the storage of sealed food and beverages in a variety of facilities including break rooms, waiting areas, nurses' stations, and more

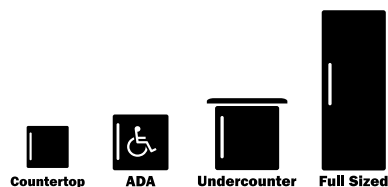

Features

Factory-installed NIST calibrated thermometer with continuous display

2-year certificate of calibration included for your records

Commercially approved to NSF-7 standards

Audible high/low temperature alarms

Factory-installed keyed locks

Adjustable shelving for easier storage

Matching refrigerator and freezer sets available

Range of sizes including countertop, undercounter, ADA compliant, and full capacity



SKU: SCR215LNZ



SKU: FF31L7NZ



SKU: SCR600BGLBINZ



SKU: FFAR121SSNZ

Refrigerators

SKU	CAPACITY	H x W x D	DOOR	CABINET	SHELVES	INSTALLATION	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
FFAR25L7NZ	1.7 cu.ft.	22.75" x 17" x 19.13"	White	White	2	Freestanding	1.3	60 lbs	ETL, ETL-C, ETL-S
SCR215LNZ	1.7 cu.ft.	22.75" x 17" x 18.75"	Glass	White	2	Freestanding	1.3	60 lbs	ETL, ETL-C, ETL-S
FF6LWB17NZ	5.5 cu.ft.	33.5" x 23.63" x 23.5"	White	White	3	Built-in/Freestanding	1.3	110 lbs	ETL, ETL-C, ETL-S
FF6LWB17NZADA	5.5 cu.ft.	32" x 23.63" x 23.5"	White	White	3	Built-in/Freestanding	1.3	110 lbs	ETL, ETL-C, ETL-S
SCR600GLBINZ	5.5 cu.ft.	33.5" x 23.63" x 23.5"	Glass	White	4	Built-in/Freestanding	1.8	122 lbs	UL, UL-C, ETL-S
SCR600GLBINZADA	5.5 cu.ft.	32" x 23.63" x 23.5"	Glass	White	4	Built-in/Freestanding	1.8	122 lbs	UL, UL-C, ETL-S

Freezers

SKU	CAPACITY	H x W x D	DOOR	CABINET	SHELVES	INSTALLATION	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
SCFU386NZ	2 cu.ft.	26.25" x 23.38" x 20.63"	Glass	Gray	2	Freestanding	4	95 lbs	ETL, ETL-C, ETL-S

*Specifications are subject to change without notice. For the most current information, visit accucold.com

Break Room Refrigerator-Freezers

Variety of choices equipped with NIST calibrated thermometers

that provide a continuous digital display of the current and high/low temperature



Countertop



ADA



Undercounter



Full Sized

Features

Factory-installed NIST calibrated thermometer

2-year certificate of calibration included for your records

Audible high/low temperature alarm

Digital temperature readout for each section

(refrigerator only for undercounter choices)

Frost-free operation in full-sized units

Adjustable shelving and door storage

Interior lighting in the fresh food compartment

User-reversible door swing to best accommodate any setting



SKU: BKRF663B



SKU: BKRF661



SKU: BKRF1089PL



SKU: BKRF21W

SKU	CAPACITY	H x W x D	DOOR	CABINET	SHELVES	INSTALLATION	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
BKRF661	5.1 cu.ft	32.63" x 23.63" x 23"	White	White	3 glass	Freestanding	1.3	110 lbs	UL, UL-C
BKRF661BIADA	5.1 cu.ft	32" x 23.63" x 23"	White	White	3 glass	Built-in/Freestanding	1.3	110 lbs	UL, UL-C
BKRF663B	5.1 cu.ft	32.63" x 23.63" x 23"	Black	Black	3 glass	Freestanding	1.3	110 lbs	UL, UL-C
BKRF663BBIADA	5.1 cu.ft	32" x 23.63" x 23"	Black	Black	3 glass	Built-in/Freestanding	1.3	110 lbs	UL, UL-C
BKRF1088W	10.1 cu.ft.	61.88" x 23.25" x 26.5"	White	White	3 glass	Freestanding	1.5	188	CSA, CSA-C
BKRF1087B	10.1 cu.ft.	61.88" x 23.25" x 26.5"	Black	Black	3 glass	Freestanding	1.5	188	CSA, CSA-C
BKRF1089PL	10.1 cu.ft.	61.88" x 23.25" x 26.5"	SS Look	Black	3 glass	Freestanding	1.5	188	CSA, CSA-C
BKRF18W	18 cu.ft.	68" x 29.5" x 31.25"	White	White	2 glass	Freestanding	1.1	200 lbs	UL, UL-C
BKRF18PL	18 cu.ft.	68" x 29.5" x 31.25"	Stainless Look	Gray	2 glass	Freestanding	1.1	200 lbs	UL, UL-C
BKRF21W	20.4 cu.ft	70.5" x 29.63" x 31.75"	White	White	4 wire	Freestanding	6	230 lbs	CSA
BKRF21B	20.4 cu.ft	70.5" x 29.63" x 31.75"	Black	Black	4 wire	Freestanding	6	230 lbs	CSA

*Most units can be ordered with combination or key locks

*Specifications are subject to change without notice. For the most current information, visit accucold.com

Compact & Mid-Sized Microwaves

Commercially approved units and basic countertop microwaves for a variety of heating applications



Features

Black, white, or stainless steel finish options

Commercially approved choices listed to NSF-4 standards

115V operation to work with standard outlets

Digital control pads for easy use

Savable settings for faster one-touch cooking

Can be ordered pre-mounted to virtually any Accucold or Summit refrigerator

USB ports on select items

Refrigerator-Microwave combinations available



SKU: SCM1000SS



SKU: SM903BSA



SKU: MRF34BSSA

Microwaves

SKU	CAPACITY	H x W x D	FINISH	AMPERAGE	SHIPPING WT.	WATTAGE	SPECIALTY FEATURES	CERTIFICATIONS
SCM853	.7 cu.ft.	11" x 18.88" x 14.25"	Stainless Steel	12	32 lbs	900W	-	UL, UL-C
SM904WA	.7 cu.ft.	10.38" x 17.88" x 12.13"	White	15	37 lbs	700W	Power allocator + (2) USB ports	UL, UL-C
SM903BSA	.7 cu.ft.	10.38" x 17.88" x 12.13"	Black/SS Handle	15	37 lbs	700W	Power allocator + (2) USB ports	UL, UL-C
SCM1000SS	.9 cu.ft.	12.25" x 20.25" x 14.75"	Stainless Steel	20	41 lbs	1000W	Commercially Listed	UL, UL-C, ETL-S

Microwave-Refrigerator Combinations

SKU	H x W x D	REFRIGERATOR TYPE	REFRIGERATOR CAPACITY	FINISH	SHIPPING WT	CERTIFICATIONS
MRF66BKA	43.63" x 23.63" x 23.5"	Refrigerator w/Interior Freezer	5.1 cu.ft.	Black	150 lbs	UL, UL-C
MRF34BSSA	43.38" x 19" x 19.75"	2-Door Refrigerator-Freezer	3.2 cu.ft.	SS/Black	120 lbs	UL, UL-C
MRF73PLA	54.38" x 18.5" x 19.13"	2-Door Refrigerator-Freezer	4.5 cu.ft.	SS Look/Black	155 lbs	CSA, CSA-C

MOMCUBE® Series Breast Milk Refrigeration

All-refrigerators specially designed for the unique needs of breast milk, with interior locking compartments to allow nursing mothers private storage



Countertop



ADA



Undercounter



Full Sized



Purpose-Built for Breast Milk Storage

Designed to operate between 33 and 40°F for the proper storage of human milk

Individual locking compartments for secure, separate storage for ("LK" Series)

Combination locks allow each mother her own access system

Single key override included for staff to manage as needed

Audible/visual alarms for high/low temperature excursions

Open door alarm offers added assurance in office or hospital settings



Advanced Temperature Performance

Intelligent microprocessor digital temperature controller

Improved accuracy with a buffered probe in glycol-filled bottle to simulate temperature of stored bottles

Additional sensor reads interior air temperature for superior temperature control

Digital display of the min/max temperature (updated in 15 minute increments)

Password protection of control parameters beyond setpoint

Optimized forced air cooling for excellent temperature stability



Fully Featured Interior For Convenient Storage

Energy efficient LED lighting with internal on/off switch

½" probe port included to accept user-provided monitoring equipment



Quality Design For Reliable Performance

Hospital grade cord with a green dot plug

Antimicrobial silver ion-coated handle for added protection from germs

Self-closing door offers added storage protection

Environmentally friendly natural hydrocarbon refrigerant for reduced global warming potential

Meets EPA and SNAP requirements

Convenient security with a top-mounted front door lock (2 keys included)

Powerful magnetic door gaskets to ensure a tight seal for energy savings and improved performance



SKU: ARS8MLMCLK

MOMCUBE Freezers:

Provide additional solutions for longer term storage. These units come with a more basic featured package.



Interior locking compartments allow private storage



Designed to maintain recommended temperature for breast milk storage



Technical Specifications (Refrigerators*):

Defrost type: Cycle
Thermostat: Intelligent microprocessor digital
Temperature sensors: 2 (air probe & buffered probe)
Adjustable operating control range: 33 to 40°F
Temperature variation: +/-1.8°F*
Shelving: Interior locking compartments or adjustable white plastic coated wire
Voltage: 115V/60Hz
Cord: NEMA 5-15P
Lock: Factory-installed key lock + individual combination locks with single key override ("LK" Series)
Refrigerant: Eco-friendly R600a
Light: LED

SPRF11MC



ARS6MLMC



ARS8MLMCLK



ARS15MLMCLK



Access Port: 1/2"
Door: Reversible
Fan: Internal
Certifications: ETL, ETL-C
Parts & Labor Warranty: 2 years
Compressor Warranty: 5 years

Included with units:

2 keys for outer door
 2 keys to override combination locks
 User manual

DESIGNED TO PROVIDE +/-1.8°F VARIATION

The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period.



Extended Warranty

2-year parts & labor
 5-year compressor



Eco-Friendly

Uses environmentally friendly hydrocarbons for a greener footprint



Logging Option

DDLs available for cloud or USB-based outputs



LOCKERS

Individual storage compartments with combination locks

Refrigerators

	SKU	CAPACITY	H x W x D	INSTALLATION	DOOR	CABINET	INTERIOR	AMPERAGE	SHIPPING WT.
🔒	ARS1MLMC	1 cu.ft.	21.5" x 17.5" x 19.75"	Freestanding	White	White	2 shelves	0.6	70 lbs
🔒	ARS2MLMC	1.94 cu.ft.	22.25" x 18.5" x 23.25"	Freestanding	White	White	2 shelves	0.6	86 lbs.
🔒	ARS3MLMC	3 cu.ft.	34" x 18.5" x 19"	Freestanding	White	White	4 shelves	0.6	90 lbs
🔒	ARS32MLMCBIADA	2.83 cu.ft.	32" x 23.38" x 22.63"	Recessed	White	White	4 shelves	0.6	113 lbs
🔒	ARS6MLMC	6 cu.ft.	32.5" x 23.38" x 24.63"	Freestanding	White	White	4 shelves	0.75	120 lbs
🔒	ARS6MLMCLK	6 cu.ft.	32.5" x 23.38" x 24.63"	Freestanding	White	White	2 locking compartments	0.75	150 lbs
🔒	ARS62MLMCBIADA	6 cu.ft.	32" x 23.38" x 25"	Recessed	White	White	4 shelves	0.75	150 lbs
🔒	ARS62MLMCBIADADLK	6 cu.ft.	32" x 23.38" x 25"	Recessed	White	White	2 locking compartments	0.75	150 lbs
🔒	ARS8MLMC	8 cu.ft.	50" x 23.38" x 24.38"	Freestanding	White	White	7 shelves	1.4	170 lbs
🔒	ARS8MLMCLK	8 cu.ft.	50" x 23.38" x 24.38"	Freestanding	White	White	2 locking compartments	1.4	210 lbs
🔒	ARS12MLMC	12 cu.ft.	61.75" x 23.38" x 24.38"	Freestanding	White	White	7 shelves	1.4	185 lbs
🔒	ARS12MLMCLK	12 cu.ft.	61.75" x 23.38" x 24.38"	Freestanding	White	White	6 locking compartments	1.4	230 lbs
🔒	ARS15MLMC	15 cu.ft.	72" x 23.38" x 24.38"	Freestanding	White	White	7 shelves	1.4	215 lbs
🔒	ARS15MLMCLK	15 cu.ft.	72" x 23.38" x 24.38"	Freestanding	White	White	8 locking compartments	1.4	300 lbs

Freezers


	SKU	CAPACITY	H x W x D	INSTALLATION	DOOR	CABINET	INTERIOR	AMPERAGE	SHIPPING WT.
🔒	AFZ1PVMC	1.5 cu.ft.	22.25" x 18.5" x 23.25"	Freestanding	White	White	1 shelf	1.3	86 lbs.
🔒	AFZ2PVBADAMC	2.47 cu.ft.	32" x 19.75" x 22.63"	Recessed	White	White	4 shelves	1.3	110 lbs.
🔒	AFZ5PVBADAMC	3.88 cu.ft.	31.75" x 23.38" x 25"	Recessed	White	White	4 shelves	1.3	165 lbs.
🔒	AFS14PVMC	9.53 cu.ft.	74.38" x 23.5" x 25.25"	Freestanding	White	White	6 shelves	4.6	280 lbs.
🔒	AFS17PVMC	14.83 cu.ft.	79.5" x 27.5" x 26.63"	Freestanding	White	White	6 shelves	4.6	300 lbs.

Portable Refrigerator/Freezer

	SKU	CAPACITY	H x W x D	FINISH	POWER	TEMPERATURE RANGE	SHIPPING WEIGHT	SHIPPING WT.
	SPRF11MC	.35 cu.ft.	11.25" x 14" x 16.13"	White	12/24V DC/115V	-20 to +8°C	17 lbs.	37 lbs

PURETHERM Blanket Warmers

Keep towels, blankets, and other linens properly warmed in hospitals, clinics, spas, and other facilities



Features

Passive heating system

Stainless steel or hammered aluminum interior for easy cleaning

Double pane tempered glass door provides a full view of blanket inventory

Digital thermostats ensure intuitive temperature management

Large LED readout of the temperature

Factory-installed lock with two keys included

Silent operation (PTHC series) with no moving parts

Automatic turnoff prevents overheating

Flush design with a sealed back

Optional dollies available for easier mobility



Stainless steel construction for lasting durability



SKU: PTHC65G



SKU: AWC12PB

	SKU	CAPACITY	H x W x D	DOOR	CABINET	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
🔒	PTHC65GUC	4.57 cu.ft.	34.25" x 23.5" x 23.5"	Glass	SS	5.5	145 lbs	ETL, ETL-C
🔒	PHC51G	2 cu.ft.	29.5" x 23.38" x 19.88"	Glass	Gray	5.5	145 lbs	ETL, ETL-C
🔒	PTHC65G	4.57 cu.ft.	36" x 23.63" x 23.5"	Glass	Stainless Steel	5.5	145 lbs	ETL, ETL-C
🔒	PTHC125G	10.57 cu.ft.	60" x 23.63" x 23.75"	Glass	Stainless Steel	5.5	175 lbs	ETL, ETL-C
🔒	PTHC155G	12.17 cu.ft.	71.5" x 23.63" x 23.75"	Glass	Black	5.5	200 lbs	ETL, ETL-C
🔒	PTHC155GCSS	12.17 cu.ft.	71.5" x 23.63" x 23.75"	Glass	Stainless Steel	5.5	215 lbs	ETL, ETL-C
🔒	AWC2PB	3.39 cu.ft.	21.88" x 23.5" x 23.88"	Glass	White	2	80 lbs.	ETL, ETL-C
🔒	AWC6PB	5.22 cu.ft.	35.5" x 23.5" x 23.88"	Glass	White	2	124 lbs.	ETL, ETL-C
🔒	AWC12PB	12.54 cu.ft.	68.13" x 23.5" x 23.88"	Glass	White	3.4	225 lbs.	ETL, ETL-C

*Specifications are subject to change without notice. For the most current information, visit accucold.com

Portable Refrigerator/Freezers

Ensure proper cold chain management with mobile refrigeration designed for easy travel and reliable storage



Features

Includes a 12V power cord to connect to vehicle sockets

110V AC/DC power adapter included for alternate use

Factory-installed casters for smooth mobility (most models)

Flexible strap handle or trolley allows easy steering

Digital control panel ensures easy operation

Compressor-based cooling system for more stability

Refrigerator or freezer temperature options



SKU: SPFZ25



SKU: SPRF26M



SKU: SPRF11

Refrigerator/Freezers

SKU	CAPACITY	H x W x D	FINISH	PORTABLE FEATURES	POWER	TEMPERATURE RANGE	SHIPPING WEIGHT (LBS)
SPRF11	.35 cu.ft.	11.25" x 14" x 16.13"	White	Handles	12/24V DC/115V	-20 to 8°C	17 lbs
SPRF26	.88 cu.ft.	17" x 21.25" x 14.25"	Gray	Handles	12/24V DC/115V	-20 to 8°C	30 lbs
🔒 SPRF26M	.88 cu.ft.	17" x 21.25" x 14.25"	Gray	Collapsible trolley	12/24V DC/115V	-15 to 8°C	32 lbs
🔒 SPRF36M2	1.06 cu.ft.	24.25" x 21.63" x 14.75"	Gray	Factory-installed casters w/handle	12/24V DC/115V	-15 to 8°C	50 lbs

Freezers

SKU	CAPACITY	H x W x D	FINISH	PORTABLE FEATURES	POWER	TEMPERATURE RANGE	SHIPPING WEIGHT (LBS)
SPFZ25	.88 cu.ft.	17" x 21.25" x 14.25"	Blue	Handles	12/24V DC/115V	-30 to -20°C	30 lbs
🔒 SPFZ25M	.88 cu.ft.	17" x 21.25" x 14.25"	Blue	Collapsible trolley	12/24V DC/115V	-30 to -20°C	32 lbs

General Purpose Refrigerators and Freezers

Wide selection of general purpose options ideal for non-critical storage (ice packs, cold packs) in a variety of application including nursing stations, waiting rooms, recovery areas, and more

Features

Factory-installed front locks for keyed security (Most Units)

32" high choices for use under lower ADA compliant counters

Commercially listed choices to meet NSF-7 and JCAHO guidelines

Glass and solid door models in a variety of styles

Temperature readouts included on many models

Matching refrigerator and freezer sets

Customizable to meet your exact specifications



Countertop



ADA



Undercounter



Full Sized



SKU: FFAR23LGP



SKU: ADA305AF



SKU: FF6LW



SKU: ACF33L



SKU: AGP96RF

All-Refrigerators

	SKU	CAPACITY	H x W x D	DOOR	CABINET	SHELVES	INSTALLATION	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
🔒	FFAR23LGP	1.7 cu.ft.	20.75" x 18.75" x 17.5"	White	White	1 Wire	Countertop	1	40 lbs	ETL, ETL-C
🔒	FF28LWHGP	2.4 cu.ft.	24.88" x 18.5" x 17.75"	White	White	1 Wire	Countertop	1.3	38 lbs	ETL, ETL-C
🔒	FF6LW	5.5 cu.ft.	33.5" x 23.63" x 23.5"	White	White	3 Wire	Built-in/Freestanding	0.8	100 lbs	ETL, ETL-C, ETL-S
🔒	ADA404REF	3.53 cu.ft.	32" x 19.75" x 22.5"	White	White	3 Wire	Built-in/Freestanding	1.1	70 lbs	ETL, ETL-C, ETL-S
🔒	SCR600GLBIADAGP	5.5 cu.ft.	32.38" x 23.63" x 23.5"	Glass	White	4 Glass	Built-in/Freestanding	1.8	105 lbs	UL, UL-C, ETL-S
🔒	FF7LWBIADAGP	5.5 cu.ft.	32.25" x 23.63" x 23.5"	White	White	3 Wire	Built-in/Freestanding	1.4	105 lbs	UL, UL-C, ETL-S

All Freezers

	SKU	CAPACITY	H x W x D	DOOR	CABINET	SHELVES	INSTALLATION	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
🔒	FS24LGP	1.4 cu.ft.	20" x 18.5" x 17.63"	White	White	1 Wire	Countertop	0.8	40 lbs	ETL, ETL-C
🔒	FS30LGP	1.8 cu.ft.	24.63" x 18.5" x 17.75"	White	White	2 Wire	Countertop	0.8	45 lbs	ETL, ETL-C
🔒	F407LW	2.8 cu.ft.	34" x 19.25" x 21.38"	White	White	4 baskets	Freestanding	1.6	80 lbs	ETL, ETL-C
🔒	ADA305AF	2.47 cu.ft.	32" x 19.75" x 22.5"	White	White	3 pull-out baskets	Built-in/Freestanding	0.6	70 lbs	ETL, ETL-C, ETL-S
🔒	ACF33L	2.65 cu.ft.	31.5" x 19.5" x 22.75"	White	White	3 Wire	Built-In/Freestanding	2	89	ETL, ETL-C, ETL-S
🔒	VT65MLGP	3.5 cu.ft.	33.5" x 23.63" x 23.5"	White	White	3 Drawers	Freestanding	1.3	110 lbs	ETL, ETL-C
🔒	VT65MLBIADAGP	3.5 cu.ft.	32.25" x 23.63" x 23.5"	White	White	4 Drawers	Freestanding	1.3	110 lbs	UL, UL-C

Refrigerator-Freezers

	SKU	CAPACITY	H x W x D	DOOR	CABINET	SHELVES	INSTALLATION	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
🔒	ADA302RFZ	2.68 cu.ft.	32" x 19.75" x 22.5"	White	White	3 Glass	Built-in/Freestanding	1.1	70 lbs	ETL, ETL-C
	AGP34RF	3.2 cu.ft.	33.38" x 19" x 19.75"	White	White	2 wire	Freestanding	1.1	65 lbs	ETL, ETL-C
	AGP96RF	7.1 cu.ft.	59" x 21.5" x 21.75"	White	White	2 wire	Freestanding	0.54	110 lbs	ETL, ETL-C

General Purpose Refrigerators & Freezers

Variety of **larger capacity storage solutions** for general purpose applications, including **TAA compliant options** with glass or solid doors



Features

Large capacity choices up to 54 cu.ft.

Slim-fitting choices in easy-fitting footprints

TAA compliant options made in North America

Glass and solid door models in a variety of sizes

Matching refrigerator and freezer sets

Customizable to meet your exact specifications



SKU: FFUF234IM



SKU: ACR1818

All-Refrigerators

SKU	CAPACITY	H x W x D	DOOR	CABINET	SHELVES	DOOR SWING	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
ACR82L	7.56 cu.ft.	61.25" x 21" x 21.88"	Glass	White	(3) Wire	RHD	2.5	240 lbs	UL, UL-C, UL-S
ACR261RH	21.34 cu.ft.	81.75" x 29.88" x 29.63"	Glass	White	(4) Wire	Reversible	3.2	300 lbs	UL, UL-C, UL-S
ACR261LH	21.34 cu.ft.	81.75" x 29.88" x 29.63"	Glass	White	(4) Wire	LHD	3.2	300 lbs	UL, UL-C, UL-S
FFUR19	17 cu.ft.	67" x 32.75" x 30.25"	White	White	(4) Wire	RHD	1.8	245 lbs	ETL, ETL-C
FFUR23	21 cu.ft.	79.75" x 32.75" x 30.25"	White	White	(4) Wire	RHD	1.8	265 lbs	ETL, ETL-C

All-Freezers

SKU	CAPACITY	H x W x D	DOOR	CABINET	SHELVES	DOOR SWING	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
AFG26MLRH	21.34 cu.ft.	81.75" x 29.88" x 29.63"	Glass	White	Frost-Free	RHD	5.9	300 lbs	UL, UL-C, UL-S
AFG26MLLH	21.34 cu.ft.	81.75" x 29.88" x 29.63"	Glass	White	Frost-Free	LHD	5.9	300 lbs	UL, UL-C, UL-S
UF18W	17 cu.ft.	64" x 32.75" x 29.25"	White	White	Frost-Free	RHD	1.8	218 lbs	CSA, CSA-C
UF21W	21 cu.ft.	74.38" x 32.5" x 29.5"	White	White	Frost-Free	RHD	1.8	227 lbs	CSA, CSA-C
FFUF194	17 cu.ft.	67" x 32.75" x 30.25"	White	White	Frost-Free	RHD	1.8	245 lbs	ETL, ETL-C
FFUF234	21 cu.ft.	79.75" x 32.75" x 30.25"	White	White	Frost-Free	RHD	1.8	265 lbs	ETL, ETL-C
ACFF436L	38.54 cu.ft.	81.5" x 54.25" x 29.75"	SS	SS	Frost-Free	French	4.5	450 lbs	UL, UL-C, UL-S

Refrigerator-Freezers

SKU	CAPACITY	H x W x D	DOOR	CABINET	SHELVES	DOOR SWING	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
CTR18LLF2	18 cu.ft.	66.63" x 29.5" x 31.25"	White	White	(2) Glass	Reversible	1.1	200 lbs	UL, UL-C
CTR21LLF2	21 cu.ft.	66.63" x 29.5" x 32.88"	White	White	(2) Glass	Reversible	1.1	250 lbs	UL, UL-C

Product Options & Accessories

Virtually all Accucold refrigerators and freezers and be configured to meet the unique needs of any office, laboratory, clinic, hospital, pharmacy, or other institution.

NIST Calibrated Temperature Monitoring

Our ISO/IEC 17025:2017 certified laboratory allows us to calibrate temperature monitoring equipment to NIST standards in our own facilities, ensuring accurate temperature readings for your records.



OPTION: DL2BKIT



OPTION: DLSA11CAL-24P

USB Digital Data Logger

Available installed on your equipment or for aftermarket use, the DL2B DDL with alarm provides virtually unlimited logging memory to record unit temperature to your user-set logging intervals. To help support meeting CDC/VFC guidelines, this logger also keeps the current and high/low temperature in view

Portable Loggers

Available in 12 or 24 packs, the DLSA loggers are ideal for cold chain management during the transportation process, with an integrated USB to ensure easy record keeping with downloadable software



OPTION: DL11BWIFI

WiFi Enabled Digital Data Logger

Cloud monitoring solution provides instant data access and alert notifications to ensure you never miss a critical event.



LockBoxWKit

Security Lock Box

Interior compartments with dial combination locks to provide an added level of security. Key override included

Additional Options:



OPTION: DR

Interior Options

Full-extension ventilated drawers
Locking compartments for individual access
Access ports with dry contacts
 3/8" or 1/2" probe holes



OPTION: STACKING RACK

Exterior Options

Temperature alarms with external readouts
Self-closing door swings
Dollies or NSF-listed 3"/6" locking casters
Hospital grade cord with 'green dot' plugs
Stainless steel exterior finishing
Fan-assist options for compact units
Stacking racks to combine units



OPTION: ALARM

Additional Services

Temperature displays in °F or °C
Door reversals
Pyxis-ready doors
Battery Backups



OPTION: PF1KIT

Audible Alarms

Power-out alarms
High/low temperature alarms
Open door alarms



OPTION: KAL

Locking Options

Keyless Access Lock
Battery or AC powered keypad locks
Combination lock with key override



All NIST calibrated equipment

can be re-calibrated after its certification expires by sending the device or probe to our ISO/IEC 17025:2015 certified laboratory


Additional options are available

Contact our product specialists for more information on how we can customize any unit to your facility's precise storage needs

COMING SOON:


HEMOVAULT[®]
by accucold.

Blood Bank Refrigeration

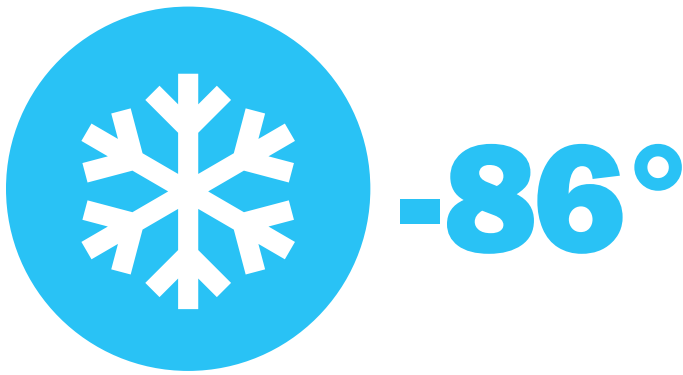

Ultra Low Temperature

Upright Freezers

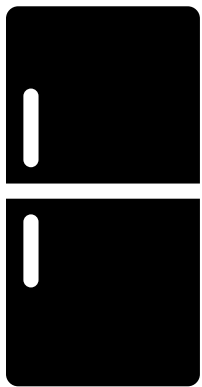

Performance Series

Full-Sized Refrigerator-Freezer Combinations

Services & Product Support

Accucold's headquarters and value-added manufacturing facilities are based in the United States, with an experienced team of engineers and technicians available to ensure reliable equipment performance in critical settings. Some of our services include:

Calibration

Temperature monitoring devices can be calibrated and re-calibrated to NIST standards in our ISO/IEC 17025:2017 accredited laboratory.

Preventative Maintenance

Bi-annual and annual services available.

Contact **info@accucold.com** for additional information

Validation (IQ/OQ)

Installation Qualification and Operation Qualification service available on select items.

Contact **info@accucold.com** for additional information

Customer Support

Accucold technical specialists are always on call to help troubleshoot your equipment.

Our in-house team can be reached at techsupport@accucold.com or **888.4.MEDLAB** ext. **513**

White Glove Delivery

Available on our complete product line through multiple carriers.

For details, contact us at **freightquotes@accucold.com**



CDC Vaccine Storage Guidelines

Excerpts from the Vaccine Storage and Handling Toolkit
Updated January 2023



NIST Calibrated Temperature Monitoring



CDC recommends this as a minimal action to protect your vaccine supply

Vaccine Storage Units: Refrigerator and Freezer Recommendations

There are several types of vaccine storage units available. Purpose-built units are specifically designed to store vaccines.



Use purpose-built or pharmaceutical-grade units designed to either refrigerate or freeze. These units can be compact, under-the-counter style or large. Purpose-built units, sometimes referred to as “pharmaceutical-grade,” are designed specifically for storage of biologics, including vaccines.

These units often have:

- Microprocessor-based temperature control with a digital temperature sensor (thermocouple, resistance temperature detector [RTD], or thermistor)
- Fan-forced air circulation with powerful fans or multiple cool air vents promoting uniform temperature and fast temperature recovery from an out-of-range temperature.

Temperature Ranges

Refrigerators should maintain temperatures between 2°C and 8°C (36°F and 46°F)*. Freezers should maintain temperatures between -50°C and -15°C (-58°F and +5°F). Ultra-cold freezers should maintain temperatures between -90°C and -60°C (-130°F and -76°F). Refrigerator or freezer thermostats should be set at the factory-set or midpoint temperature, which will decrease the likelihood of temperature excursions.

Temperature Monitoring Device (TMD)

Every vaccine storage unit must have a TMD. An accurate temperature history that reflects actual vaccine temperatures is critical for protecting your vaccines. Investing in a reliable device is less expensive than replacing vaccines wasted due to the loss of potency that comes from storage at out-of-range temperatures.



CDC recommends a specific type of TMD called a “digital data logger” (DDL).

A DDL provides the most accurate storage unit temperature information, including details on how long a unit has been operating outside the recommended temperature range (referred to as a “temperature excursion”). Unlike a simple minimum/maximum thermometer, which only shows the coldest and warmest temperatures reached in a unit, a DDL provides detailed information on all temperatures recorded at preset intervals.

*** For more information, download the Toolkit at [cdc.gov](https://www.cdc.gov).**



CDC Best Practice – CDC recommends best practices as additional actions, practices, and procedures to enhance protection of your vaccine supply.

Precise - Stable - Efficient - Whisper Quiet

Accucold is proud to lead the industry with the largest line of cold storage product sizes certified to the NSF/ANSI 456 Vaccine Storage Standard



PHARMA-VAC
PERFORMANCE



Proven Stability

with a purpose-built design to meet
the CDC guidelines for vaccine storage

Best-In-Class Delivery • Largest Finished Goods Inventory

accucold.com • 1.888.4.MEDLAB



Learn more online at accucold.com.

For additional assistance, please refer to the directory below.

Sales Assistance:

888.4.MEDLAB ext. 509

info@accucold.com

Service Help:

888.4.MEDLAB ext. 508

service@accucold.com

Technical Support:

888.4.MEDLAB ext. 513

techsupport@accucold.com

Replacement Parts:

888.4.MEDLAB ext. 512

parts@accucold.com



Professional Cold Storage Designed and Purpose-Built for Biotech, Medical, Life Science, and Pharmacy

202506

accucold

ACCUCOLD DIVISION, FELIX STORCH, INC. • ISO 9001:2015 • ISO/IEC 17025:2017 CERTIFIED CALIBRATION LABORATORY
770 Garrison Avenue, Bronx, NY 10474 USA • TEL 888.4.MEDLAB • FAX 844.478.8799 • info@accucold.com • accucold.com