

Step-by-Step Unpacking Instructions

TO AVOID DAMAGE OR VOIDED WARRANTY, CAREFULLY FOLLOW EACH STEP BELOW

What you'll need:


- Minimum two-person lifting team
- Utility Knife
- Lifting straps and shoulder harness (included)



Scan to Watch the Unpacking Video Guide

Step 1: Unload the Refrigerator and the Shoulder Harness Box

- Cut and discard zip ties securing the refrigerator to the kitchen
- Immediately place the refrigerator upright (Do not plug it in yet!)
- Set the harness box aside—you'll need it for lifting.

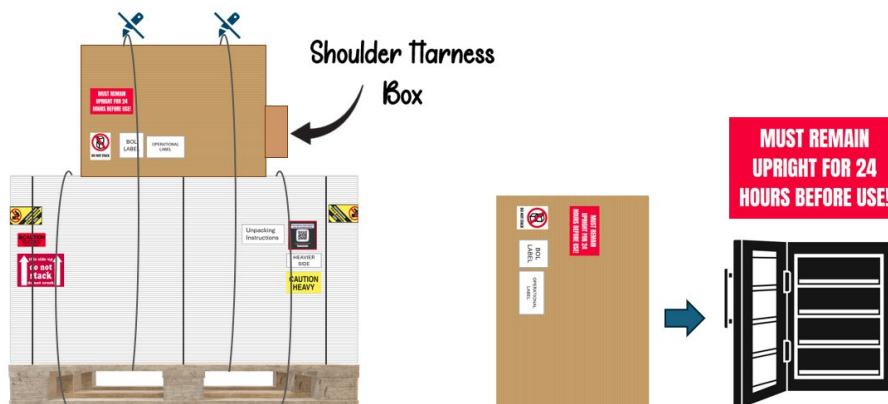

Keep the unit on the pallet until instructed to remove it.
If removing it is **absolutely necessary** to reach the final destination, proceed with caution and follow proper handling guidelines below.

Unload the Kitchen from the Pallet

- Cut and discard the zip ties securing the kitchen to the pallet.
- Carefully slide the kitchen off the pallet with a two-person team.

CAUTION: If you must tilt the unit on its side, keep it in its outer box, place the side labeled **"Heavier Side"** on the bottom, and use a dolly or hand truck to move it. Remove the outer box only once the unit is in its final installation spot.



Step 2: Remove the Outer Wrapping/Shrink Wrap


- Remove black ties, corner guards, and shrink wrap using a utility knife.



Step 3: Remove the Outer Box & Flatten the Bottom Tray



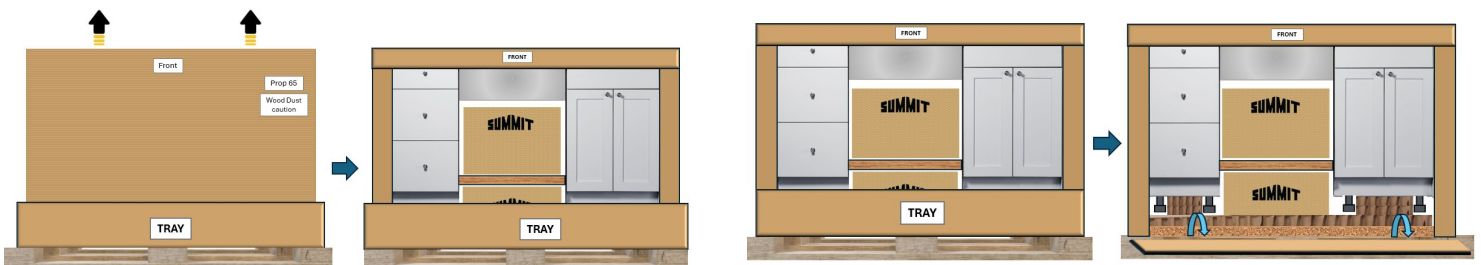

- Remove the outer box to expose the lifting straps located at the sides of the box
- Flatten the bottom tray to expose the honeycomb platform.

Note: Locate the front and back of the unit.



IMPORTANT: DO NOT remove the honeycomb platform yet.

Step 4: Attach the Lifting Straps to Shoulder Harness


| 1 | 2 | 3 | 4 |
|---|---|--|---|
|  |  |  |  |
| Each lifter should put on a harness with the metal buckle facing the front | The harness forms an "X" across the center of the back. | Thread the lifting straps through the metal buckles | Squat, straighten your arms and stand up simultaneously! |

Step 5: Lift the Unit Off the Tray & Pallet

- Following proper form, lift the unit simultaneously, ensure the honeycomb platform stays underneath. If you experience any strain or instability, set it down, reposition, or ask for help.


⚠ CRITICAL WARNING ⚠

If you feel pain, strain, or instability — STOP immediately.

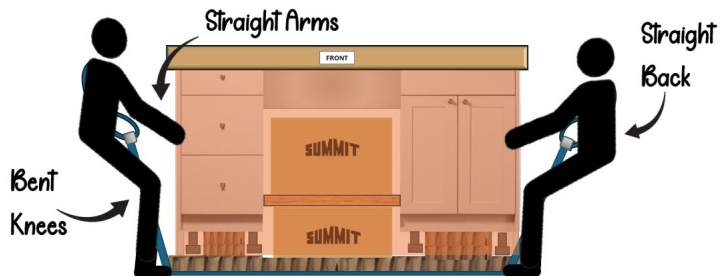


Step 6: Remove Packaging Materials & the Boxes Containing Hardware and Sink (some models)

- DO NOT** remove the support brace yet.
- Remove shrink wrap, foam, and countertop cap.

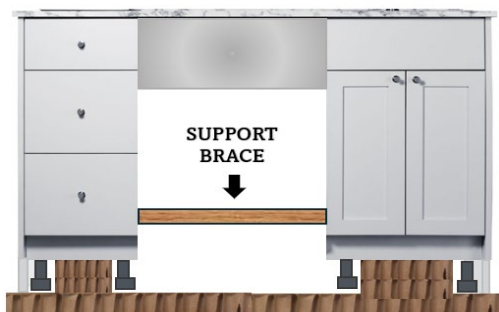

Step 7: Level the Legs

- Adjust the legs until they are flush with the side panels.
- This helps evenly distribute the kitchen's weight.

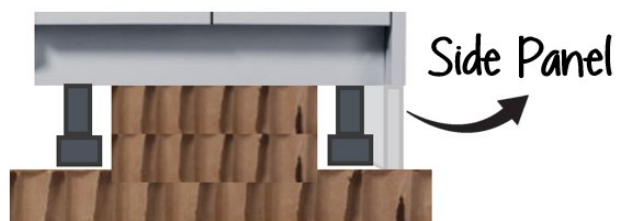

Step 8: Remove the Kitchen from the Honeycomb Platform



⚠ CRITICAL WARNING ⚠

Do not lift from the countertop or attempt to disassemble the kitchen. Any attempt to disassemble the kitchen will void the warranty.

Suggested Lifting Method:

- Open the top drawer and the cabinet doors.
- Slide your hands **into the openings** underneath the countertop support frame.
- Lift straight up from the inside of the cabinet frame—**NOT** from the counter edges or top surface
- After lifting the unit off the honeycomb platform, lower it into place and confirm it is level and stable.
- Remove the support brace after installation

STEP 9: Consult a Contractor for Proper Installation

- Professional installation is recommended for plumbing, wall anchoring, and code compliance.

IMPORTANT: Report any shipping damage before installation.

Additional Safety Reminders:

- Keep all unpacking areas free of debris and packaging materials.
- Inspect your kitchen immediately after unpacking.