



## Glass Door SKU: **ARG6PV** • Solid Door SKU: **ARS6PV**

### 6 Cu.Ft. ADA Height Vaccine Refrigerator

**32.5" H x 23.38" W x 24.38" D (H x W x D) • 6 cu.ft. (170L)**

Designed and purpose-built for pharmacy, medication, and vaccine applications to support meeting CDC/VFC/VFA guidelines, with antimicrobial handle



#### Advanced Temperature Control

- Intelligent microprocessor digital temperature controller
- Improved temperature accuracy with a buffered probe in glycol-filled bottle to simulate temperature of stored product
- Additional sensor reads interior air temperature for superior temperature control
- Adjustable operating control range from +2°C to +8°C (+35.6°F to +46.4°F)
- Digital display of the min/max temperature (updated in 15 minute increments)
- Temperature viewable in Celsius and Fahrenheit to the nearest tenth of a degree
- Password protection of control parameters beyond setpoint
- Optimized forced air cooling for excellent temperature stability and uniformity with rapid recovery after door openings and product loading



#### Fully Featured Interior for Convenient Storage

- Energy efficient LED lighting with internal on/off switch
- Adjustable plastic-coated wire shelves for improved circulation
- Multiple shelf positions spaced at ½" to allow flexible adjusting to support smaller items
- Adjustable cycle defrost operation
- ½" probe port included to accept user-provided monitoring equipment



#### Multiple Alarms for Safer Monitoring

- Audible/visual alarms for high/low temperature excursions
- Open door alarm sounds if the door is left ajar (default 4 minutes with selectable 1-99 minute range)
- Audible power failure and sensor failure alarms
- Mute function for alarms
- Remote alarm contacts in rear of the unit



#### Quality Design for Reliable Performance

- Hospital grade cord with a green dot plug
- Powder-coated handle with naturally occurring silver ions to reduce the spread of germs
- Self-closing door offers added storage protection
- User-reversible door swing (self-closing function compatible with RHD position only)
- Environmentally-friendly natural hydrocarbon refrigerant for reduced global warming potential
- Meets EPA and SNAP requirements
- Convenient security with a top-mounted door lock (2 keys included)
- Magnetic gaskets to ensure a positive seal
- Pyxis®, Omnicell® and AcuDose RX® compatible



#### EXTENDED WARRANTY

- 2-year parts & labor
- 5-year compressor



#### ADA OPTIONS

32" high choices for use under lower ADA compliant counters



#### ECO-FRIENDLY

Uses environmentally friendly hydrocarbons for a greener footprint



#### NEW OPTIONS


Keyless locks, interior lockers, & full-extension drawers now available

## ARS6PV Specifications


Overview	
Height of Cabinet	32.5" (83 cm)
Width	23.38" (59 cm)
Width with Door Open	23.88" (61 cm)
Depth	24.38" (62 cm)
Depth with Handle	26.13" (66 cm)
Depth with door at 90°	46.5" (118 cm)
Capacity	6.0 cu.ft. (170 L)
Defrost Type	Automatic
Door (ARS6PV)	White
Door (ARG6PV)	Glass
Cabinet	White
US Electrical Safety	ETL
Canadian Electrical Safety	ETL-C
Amps	0.75
Voltage/Frequency	115 V AC/60 Hz
Weight	115.0 lbs. (52 kg)
Parts & Labor Warranty	2 Years
Compressor Warranty	5 Years
UPC	761101062556

Refrigerator Features	
Door Swing	RHD
Reversible	Yes
Shelf Type	Wire
Shelf Qty	4
Adjustable Shelves	Yes
Thermostat Type	Digital
Fan Type	Interior
Refrigerant Type	R600a
Refrigerant Amount	1.66 oz.
Interior Light	Yes
Temperature Range	2 to 8°C
Sound Level	36.4 dB


Interior	
Interior Height	24.5" (62 cm)
Interior Width	20.0" (51 cm)
Interior Depth	17.0" (43 cm)
Compressor Step Height	6.5" (17 cm)
Compressor Step Width)	20.0" (51 cm)
Compressor Step Depth	5.0" (13 cm)

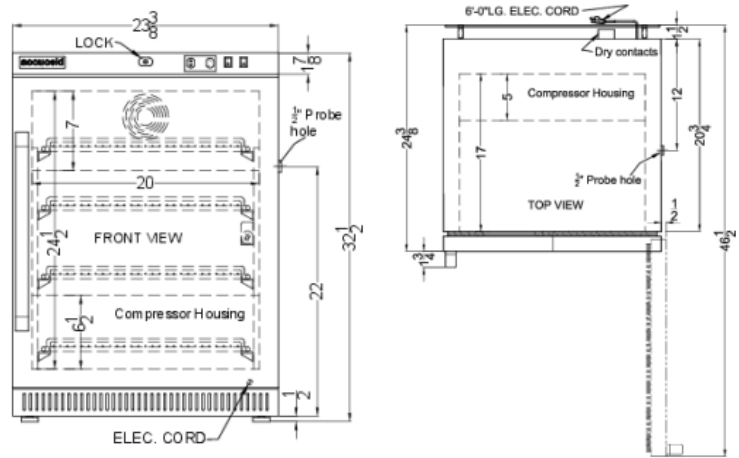

## Advanced Temperature Control

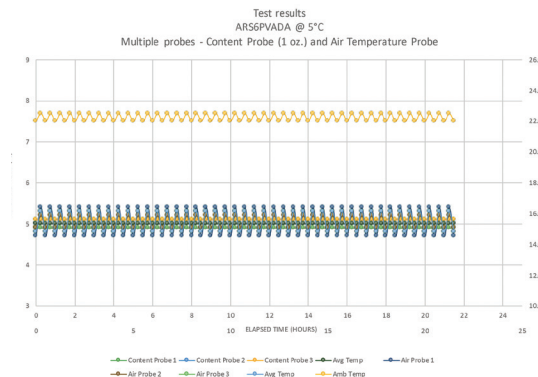

## Whisper Quiet Performance




## Popular Options & Support

- **NSF/ANSI 456** Certification
- **NIST** Calibrated DDL
- **Keyless** Entry Locks
- **Internal** Lockers or Drawers
- **Preventative** Maintenance

Call 888.4.MEDLAB for more information

## Energy Conservation

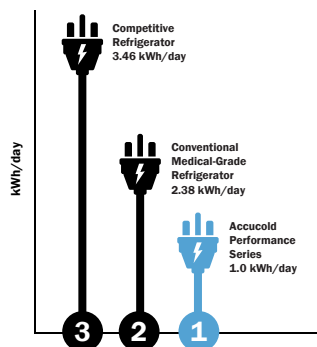

**accucold.**

ACCUCOLD DIVISION FELIX STORCH, INC. ISO 9001:2015 CERTIFIED

770 Garrison Avenue, Bronx, NY 10474 USA • TEL 718.893.3900 • FAX 844.478.8799 • info@accucold.com • accucold.com