




Glass Door SKU: **ARG12PV** • Solid Door SKU: **ARS12PV**

## 12 Cu.Ft. Upright Vaccine Refrigerator

**61.75" H x 23.38" W x 24.38" D** (157 cm H x 59 cm W x 62 cm D) • **12 cu.ft.** (340 L)

Designed and purpose-built for pharmacy, medication, and vaccine applications to support meeting CDC/VFC/VFA guidelines, with antimicrobial handle



### Advanced Temperature Control

- Intelligent microprocessor digital temperature controller
- Improved temperature accuracy with a buffered probe in glycol-filled bottle to simulate temperature of stored product
- Additional sensor reads interior air temperature for superior temperature control
- Adjustable operating control range from +2°C to +8°C (+35.6°F to +46.4°F)
- Digital display of the min/max temperature (updated in 15 minute increments)
- Temperature viewable in Celsius and Fahrenheit to the nearest tenth of a degree
- Password protection of control parameters beyond setpoint
- Optimized forced air cooling for excellent temperature stability and uniformity with rapid recovery after door openings and product loading



### Fully Featured Interior for Convenient Storage

- Energy efficient LED lighting with internal on/off switch
- Adjustable plastic-coated wire shelves for improved circulation
- Multiple shelf positions spaced at ½" to allow flexible adjusting to support smaller items
- Adjustable cycle defrost operation
- ½" probe port included to accept user-provided monitoring equipment



### Multiple Alarms for Safer Monitoring

- Audible/visual alarms for high/low temperature excursions
- Open door alarm sounds if the door is left ajar (default 4 minutes with selectable 1-99 minute range)
- Audible power failure and sensor failure alarms
- Mute function for alarms
- Remote alarm contacts in rear of the unit



### Quality Design for Reliable Performance

- Hospital grade cord with a green dot plug
- Powder-coated handle with naturally occurring silver ions to reduce the spread of germs
- Self-closing door offers added storage protection
- User-reversible door swing (self-closing function compatible with RHD position only)
- Environmentally-friendly natural hydrocarbon refrigerant for reduced global warming potential
- Meets EPA and SNAP requirements
- Convenient security with a top-mounted door lock (2 keys included)
- Magnetic gaskets to ensure a positive seal
- Pyxis®, Omnicell® and AcuDose RX® compatible



**EXTENDED WARRANTY**  
2-year parts & labor  
5-year compressor



**ADA OPTIONS**  
32" high choices  
for use under lower  
ADA compliant counters





**ECO-FRIENDLY**  
Uses environmentally  
friendly hydrocarbons  
for a greener footprint



**NEW OPTIONS**  
Keyless locks, interior  
lockers, & full-extension  
drawers now available

## ARG12PV/ARS12PV Specifications

| Overview                   |                     |
|----------------------------|---------------------|
| Height of Cabinet          | 61.75" (157 cm)     |
| Width                      | 23.38" (59 cm)      |
| Width with Door Open       | 23.88" (61 cm)      |
| Depth                      | 24.38" (62 cm)      |
| Depth with Handle          | 26.13" (66 cm)      |
| Depth with door at 90°     | 46.5" (118 cm)      |
| Capacity                   | 12.0 cu.ft. (340 L) |
| Defrost Type               | Automatic           |
| Door (ARS12PV)             | White               |
| Door (ARG12PV)             | Glass               |
| Cabinet                    | White               |
| US Electrical Safety       | ETL                 |
| Canadian Electrical Safety | ETL-C               |
| Amps                       | 1.4                 |
| Voltage/Frequency          | 115 V AC/60 Hz      |
| Weight                     | 190.0 lbs. (86 kg)  |
| Parts & Labor Warranty     | 2 Years             |
| Compressor Warranty        | 5 Years             |
| UPC                        | 761101062600        |
| Refrigerator Features      |                     |
| Door Swing                 | RHD                 |
| Reversible                 | Yes                 |
| Shelf Type                 | Wire                |
| Shelf Qty                  | 7                   |
| Adjustable Shelves         | Yes                 |
| Thermostat Type            | Digital             |
| Fan Type                   | Interior            |
| Refrigerant Type           | R600a               |
| Refrigerant Amount         | 2.11oz              |
| Interior Light             | Yes                 |
| Temperature Range          | 2 to 8°C            |
| Interior                   |                     |
| Interior Height            | 53.0" (135 cm)      |
| Interior Width             | 20.0" (51 cm)       |
| Interior Depth             | 17.0" (43 cm)       |
| Compressor Step Height     | 6.5" (17 cm)        |
| Compressor Step Width      | 20.0" (51 cm)       |
| Compressor Step Depth      | 5.0" (13 cm)        |

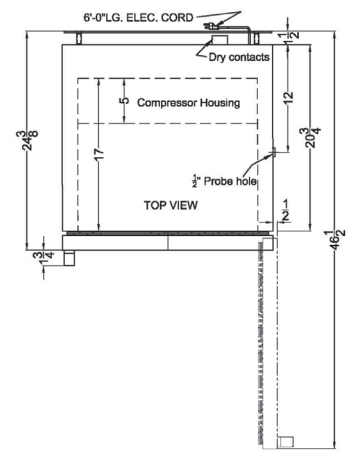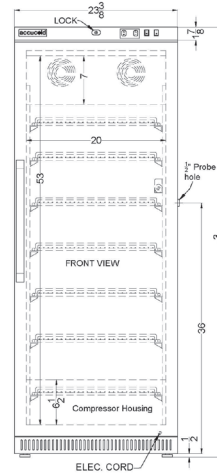


## Advanced Temperature Control


### Test Results

PHARMA-VAC Refrigerator @ 5°C


Multiple probes - Content Probe (1 oz.) and Air Temperature Probe

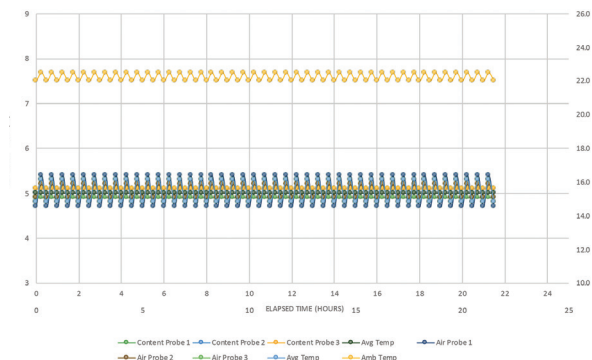

## Whisper Quiet Performance



## Energy Conservation

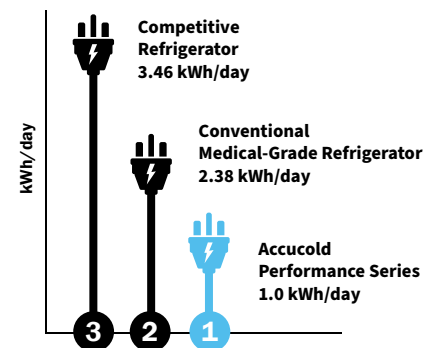

## Popular Options & Support

- NSF/ANSI 456 Certification
- NIST Calibrated DDL
- Keyless Entry Locks
- Internal Lockers or Drawers
- Preventative Maintenance

Call **888.4.MEDLAB** for more information

**accucold.**

ACCUCOLD DIVISION, FELIX STORCH, INC. • ISO 9001:2015 CERTIFIED

770 Garrison Avenue, Bronx, NY 10474 USA • TEL: 718.893.3900 • FAX: 844.478.8799 • [info@accucold.com](mailto:info@accucold.com) • [accucold.com](http://accucold.com)