accucold

ALB651IF



32.25" x 23.63" x 23.5" (H x W x D)

Built-in undercounter ADA compliant refrigerator-freezer for general purpose use, cycle defrost w/dual evaporator cooling, panel-ready door, and white cabinet

Highlights:

32" height for use under lower ADA compliant counters

Flexible design allows built-in or freestanding use in 24" spaces

Improved temperature performance with our unique dual evaporator cooling

Product Features:

ADA compliant	32 inch height fits under standard ADA counters	
Built-in capable	Make the best use of space by installing your refrigerator under the counter and flush with other cabinets	
Fully finished white cabinet	Allows the refrigerator-freezer to be used as a freestanding model	
Panel-ready door	Integrated stainless steel door frame allows you to mount full overlay panels over the door to create a custom look that can blend into cabinetry with no exposed frame	
Cycle defrost	This system utilizes user-friendly automatic defrost operation in the fresh food section and efficient manual defrost operation in the freezer compartment	
Dual evaporator	Our unique and efficient design separately cools the refrigerator while maintaining a lower temperature in the freezer compartment by utilizing two evaporators	
Adjustable thermostat	Dial thermostat located inside for easy temperature management	
Interior light	Automatically illuminates when you open the door	
Adjustable shelves	Rearrange your refrigerator space to accommodate all shapes and sizes or remove shelves for a simple clean-up	

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

info@summitappliance.com





accuceld

ALB651IF Specifications:

Overview	
Height of Cabinet	32.0" (81 cm)
Height to Hinge Cap	32.25" (82 cm)
Width	23.63" (60 cm)
Depth	23.5" (60 cm)
Depth with door at 90°	45.63" (116 cm)
Capacity	5.1 cu.ft. (144 L)
Defrost Type	Cycle
Door	Panel-Ready
Cabinet	White
US Electrical Safety	UL
Canadian Electrical Safety	ULC
Energy Usage/Year	434.0kWh/year
Amps	1.3
Voltage/Frequency	115 V AC/60 Hz
Weight	100.0 lbs. (45 kg)
Shipping Weight	105.0 lbs. (48 kg)
Parts & Labor Warranty	1 Year
Compressor Warranty	5 Years
UPC	761101004402
Refrigerator-Freezer	
Door Swing	RHD
Reversible	Factory Reversible
Adjustable Shelves	Yes
Crisper Qty	1
Crisper Finish	Transparent
Crisper Cover	Glass
Interior Light	Yes
Interior Light	
Refrigerator - Interior Height	19.5" (50 cm)
Refrigerator - Interior	19.5" (50 cm) 20.5" (52 cm)
Refrigerator - Interior Height	,
Refrigerator - Interior Height Refrigerator - Interior Width Refrigerator - Interior	20.5" (52 cm)
Refrigerator - Interior Height Refrigerator - Interior Width Refrigerator - Interior Depth	20.5" (52 cm) 17.0" (43 cm)
Refrigerator - Interior Height Refrigerator - Interior Width Refrigerator - Interior Depth Refrigerator - Shelf Type	20.5" (52 cm) 17.0" (43 cm) Glass
Refrigerator - Interior Height Refrigerator - Interior Width Refrigerator - Interior Depth Refrigerator - Shelf Type Refrigerator - Shelf Qty Refrigerator - Full Door	20.5" (52 cm) 17.0" (43 cm) Glass 2

Freezer - Interior Width	19.0" (48 cm)
Freezer - Interior Depth	11.5" (29 cm)
Thermostat Type	Dial
Fan Type	Exterior
Refrigerant Type	R134a
Refrigerant Amount	2.6 oz.
High Side PSI	285.0
Low Side PSI	70.0
Level Legs	4
Compressor Step Height	7.0" (18 cm)
Compressor Step Width	20.5" (52 cm)
Compressor Step Depth	5.0" (13 cm)

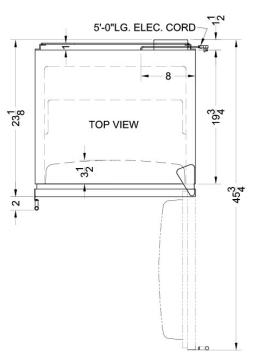



ELEC. CORD

