SUMMIT

ADFD243CSS



31.88" x 23.38" x 22.5" (H x W x D)

24 in. wide ADA compliant 2-drawer frost-free freezer for indoor or outdoor residential or commercial use, stainless steel exterior with panel-ready drawer fronts

Highlights:

32" height allows easy installation under lower ADA compliant counters

Create the perfect look with panel-ready drawer fronts that can accept custom overlay panels

Complete stainless steel construction inside and out

Product Features:

2-Drawer All-Freezer	24" wide 3.7 cu.ft. freezer with two gliding drawers	
ADA compliant design	Sized just under 32" high to allow installation under lower ADA compliant counters	
Built-in capable	Front-breathing design allows you to make the best use of space by installing your appliance under the counter and flush with other cabinets in 24" wide openings	
Indoor/Outdoor compatible	Constructed and approved for outdoor installation (as well as use indoors) with a fully sealed cooling system and weatherproof exterior	
Stainless steel drawers	Drawer interiors and exteriors are fully constructed from 304 grade stainless steel for weatherproof durability and elegant style	
Panel-ready drawer fronts	Drawers accept overlay panels (size: 23.43" x 14.1" at 3/4" thick) to let you seamlessly blend the refrigerator into cabinetry design	
Professional handles	Sleek stainless steel handles add an elegant touch to any setting	
Frost-free operation	No-frost operation for minimum user maintenance	
Digital thermostat	Electronic controls located on the top drawer ensure intuitive temperature management, with an external readout that can switch from Celsius to Fahrenheit at the touch of a button	






ADFD243CSS Specifications:

Nominal Height	32.0" (81 cm)
Height of Cabinet	31.88" (81 cm)
Nominal Width	24.0" (61 cm)
Width	23.38" (59 cm)
Nominal Depth	23.0" (58 cm)
Depth	22.5" (57 cm)
Depth with Handle	23.88" (61 cm)
Depth with door at 90°	34.25" (87 cm)
Capacity	3.7 cu.ft. (105 L)
Defrost Type	Frost-Free
Door	Stainless Steel/Panel- Ready
Cabinet	Stainless Steel
US Electrical Safety	ETL
Canadian Electrical Safety	ETL-C
Sanitation	ETL-S
Energy Usage/Year	395.0kWh/year
Amps	1.5
Voltage/Frequency	115 V AC/60 Hz
Weight	136.0 lbs. (62 kg)
Parts & Labor Warranty	1 Year
Compressor Warranty	5 Years
•	5 Years 761101088235
Warranty	
Warranty UPC	
Warranty UPC Freezer	761101088235
Warranty UPC Freezer Door Swing	761101088235 Drawer
Warranty UPC Freezer Door Swing Thermostat Type	761101088235 Drawer Digital
Warranty UPC Freezer Door Swing Thermostat Type Interior Light	761101088235 Drawer Digital Yes
Warranty UPC Freezer Door Swing Thermostat Type Interior Light Fan Type	761101088235 Drawer Digital Yes Interior and Exterior
Warranty UPC Freezer Door Swing Thermostat Type Interior Light Fan Type Refrigerant Type	761101088235 Drawer Digital Yes Interior and Exterior R600a
Warranty UPC Freezer Door Swing Thermostat Type Interior Light Fan Type Refrigerant Type Refrigerant Amount	761101088235 Drawer Digital Yes Interior and Exterior R600a 1.31 oz.
Warranty UPC Freezer Door Swing Thermostat Type Interior Light Fan Type Refrigerant Type Refrigerant Amount High Side PSI	Drawer Digital Yes Interior and Exterior R600a 1.31 oz. 270.0
Warranty UPC Freezer Door Swing Thermostat Type Interior Light Fan Type Refrigerant Type Refrigerant Amount High Side PSI Low Side PSI	Drawer Digital Yes Interior and Exterior R600a 1.31 oz. 270.0 105.0

8.0" (20 cm)
17.0" (43 cm)
14.5" (37 cm)
8.0" (20 cm)
17.0" (43 cm)
14.5" (37 cm)
4.0" (10 cm)
17.0" (43 cm)
3.5" (9 cm)
-11°F to 11°F
Yes
33.8 dB

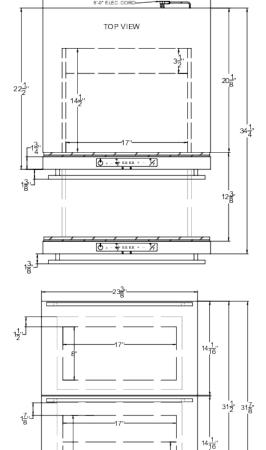

FRONT VIEW

