SUMMIT

ADRD15PNR



32" x 15" x 22.5" (H x W x D)

Commercially listed ENERGY STAR certified 15" wide 2drawer panel-ready all-refrigerator in stainless steel designed for indoor or outdoor use under standard or ADA compliant counters

Highlights:

32" height for use under lower ADA compliant counters

Panel-ready drawers allow you to customize the look to match existing cabinetry

Weatherproof construction ensures safe use outdoors

Product Features:

| ENERGY STAR certified | Ensures unit runs efficiently with an environmentally friendly performance | |
|------------------------------|---|--|
| Commercially approved | ETL-S listed to NSF-7 standards for commercial use | |
| Panel-ready drawer fronts | Drawers can be customized with overlay panels sized (at 14.88" H \times 14.17" W at 3/4" thick) to match or accent existing cabinetry | |
| ADA compliant | 32" height allows for installation within ADA-compliant spaces | |
| Adjustable height | Unit can be raised to 34.25", with a taller kickplate included for a seamless look | |
| Built-in capable | Front-breathing design allows the unit to be built-in under counters | |
| Stainless steel construction | Complete 304 grade stainless steel inside and out to ensure lasting durability with a luxurious look | |
| Indoor/Outdoor compatible | Durable, weatherproof construction designed to hold up to the elements | |
| Professional handles | Stainless steel handles add style to any setting | |








ADRD15PNR Specifications:

| Overview | | |
|-------------------------------|---------------------------------|--|
| Nominal Height | 32.0" (81 cm) | |
| Height of Cabinet | 32.0" (81 cm) | |
| Nominal Width | 15.0" (38 cm) | |
| Width | 15.0" (38 cm) | |
| Nominal Depth | 23.0" (58 cm) | |
| Depth | 22.5" (57 cm) | |
| Depth with Handle | 24.38" (62 cm) | |
| Depth with door at 90° | 37.75" (96 cm) | |
| Capacity | 2.76 cu.ft. (78 L) | |
| Defrost Type | Frost-Free | |
| Door | Stainless Steel/Panel- Ready | |
| Cabinet | Stainless Steel | |
| US Electrical Safety | ETL | |
| Canadian Electrical Safety | ETL-C | |
| Sanitation | ETL-S | |
| Energy Usage/Year | 256.0kWh/year | |
| Amps | 1.0 | |
| Voltage/Frequency | 115 V AC/60 Hz | |
| Weight | 78.0 lbs. (35 kg) | |
| Parts & Labor Warranty | 1 Year | |
| Compressor Warranty | 5 Years | |
| UPC | 761101088693 | |
| Refrigerator Features | | |
| Sabbath Mode | Yes | |
| Door Swing | Drawer | |
| Height Adjustable | Yes | |
| Thermostat Type | Digital | |
| Fan Type | Interior and Exterior | |
| Refrigerant Type | R600a | |
| Refrigerant Amount | 0.74oz. | |
| High Side PSI | 320.0 | |
| Low Side PSI | 120.0 | |
| Level Legs Qty | 4 | |
| Interior Light | Yes | |
| | | |

| Interior Drawers Qty | 2 | |
|---------------------------|----------------|--|
| Temperature Range | 34 to 43°F | |
| Sound Level | 34.2 dB | |
| Drawer Dimensions | | |
| Interior Height 1 | 8.13" (21 cm) | |
| Interior Width 1 | 8.0" (20 cm) | |
| Interior Depth 1 | 15.25" (39 cm) | |
| Interior Height 2 | 7.25" (18 cm) | |
| Interior Width 2 | 8.0" (20 cm) | |
| Interior Depth 2 | 15.25" (39 cm) | |
| Dimensions | | |
| Compressor Step Height | 4.25" (11 cm) | |
| Compressor Step Width | 8.0" (20 cm) | |
| Compressor Step Depth | 5.25" (13 cm) | |

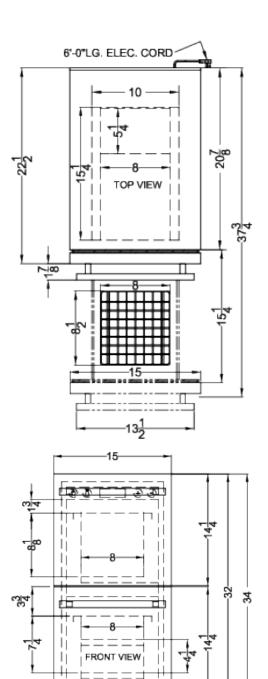



ELEC. CORD~

സ്ത്ര