

ACR52GNSF456



34" x 23.5" x 21.75" (H x W x D)

Built-in undercounter healthcare all-refrigerator certified to NSF/ANSI 456 with self-closing glass door, front lock, digital controls, and NIST calibrated temperature readout

Highlights:

Certified to NSF/ANSI 456 Vaccine Storage Standard


Specially designed to meet current CDC/VFC/VFA vaccine refrigeration guidelines for convenient storage in pharmacies, medical offices, and other healthcare facilities

User-friendly front control panel keeps the thermostat and alarm in reach without having to open the door

Product Features:

| EQTemp Medical Refrigerator | All-refrigerator designed to operate between 2 and 8°C for a variety of storage application in medical offices and other healthcare facilities |
|--|--|
| Certificate of calibration included | The temperature monitoring device (TMD) is calibrated to NIST standards in our ISO/IEC 17025:2017 certified calibration laboratory and ships with a 2-year certificate of calibration for your records |
| Certified to NSF/ANSI 456 Vaccine Storage Standard | Tested to comply with the latest standards |
| Temperature Range: 2º to 8ºC | Preset to 5°C as recommended for many storage applications |
| External temperature readout | Includes continuous display of the current interior and high/low temperature, and can be switched from Celsius to Fahrenheit at the touch of a button |
| Digital thermostat | Digital microprocessor for easy and precise temperature management, with all controls externally located for added convenience |
| High/low temperature alarm | Audible alarm sounds if the interior temperature rises or falls out of set range |
| Built-In capable | Front-breathing design lets you make the best use of space by installing your appliance under the counter |










ACR52GNSF456 Specifications:

| Overview | |
|---|--|
| Nominal Height | 34.0" (86 cm) |
| Height of Cabinet | 34.0" (86 cm) |
| Nominal Width | 24.0" (61 cm) |
| Width | 23.5" (60 cm) |
| Width with Door Open | 23.75" (60 cm) |
| Nominal Depth | 22.0" (56 cm) |
| Depth | 21.75" (55 cm) |
| Depth with door at 90° | 43.75" (111 cm) |
| Capacity | 3.88 cu.ft. (110 L) |
| Defrost Type | Automatic |
| Door | Glass |
| Cabinet | White |
| US Electrical Safety | ETL |
| Canadian Electrical Safety | ETL-C |
| Sanitation | ETL-S to NSF 456 |
| Amps | 2.0 |
| Voltage/Frequency | 115 V AC/60 Hz |
| Weight | 91.5 lbs. (42 kg) |
| Parts & Labor Warranty | 1 Year |
| Compressor Warranty | 5 Years |
| UPC | 761101083155 |
| Refrigerator Features | |
| Door Swing | RHD |
| Reversible | Factory Reversible |
| O | |
| Shelf Type | Wire |
| Shelf Type Shelf Qty | Wire 3 |
| | |
| Shelf Qty | 3 |
| Shelf Qty Adjustable Shelves | 3 Yes |
| Shelf Qty Adjustable Shelves Thermostat Type | 3 Yes Digital |
| Shelf Qty Adjustable Shelves Thermostat Type Fan Type | 3 Yes Digital Interior |
| Shelf Qty Adjustable Shelves Thermostat Type Fan Type Refrigerant Type | Yes Digital Interior R600a |
| Shelf Qty Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount | Yes Digital Interior R600a 1.23oz. |
| Shelf Qty Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount High Side PSI | Yes Digital Interior R600a 1.23oz. 1.45 |
| Shelf Qty Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount High Side PSI Low Side PSI | 3 Yes Digital Interior R600a 1.23oz. 1.45 0.85 |
| Shelf Qty Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount High Side PSI Low Side PSI Level Legs Qty | 3 Yes Digital Interior R600a 1.23oz. 1.45 0.85 |

| Dimensions | |
|------------------------|----------------|
| Interior Height | 25.88" (66 cm) |
| Interior Width | 18.75" (48 cm) |
| Interior Depth | 16.5" (42 cm) |
| Compressor Step Height | 4.0" (10 cm) |
| Compressor Step Width | 18.75" (48 cm) |
| Compressor Step Depth | 11.5" (29 cm) |

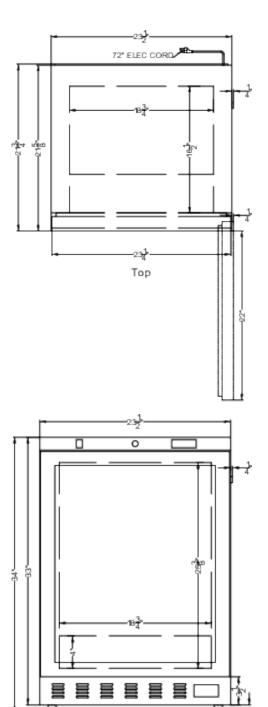



Front